


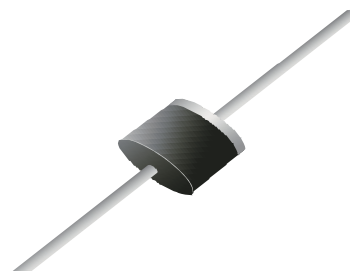


5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.

<p>P-6</p> 	<ul style="list-style-type: none"> Developped to suppress transient in the automotive system, protecting mobile transceivers, radios and tape decks from overvoltages (width pulses). <div style="text-align: center; margin-top: 10px;">  </div>
	<p>FEATURES</p> <ul style="list-style-type: none"> Glass passivated chip junction Hyperectifier structure for high reliability 5000 W peak pulse power capability with a 10/1000 μs waveform, repetitive rate (duty cycle): 0.01 % Solder dip 260°C, 10s AEC-Q101 qualified Component in accordance to RoHS 2011/65/EU and WEEE 2002/96/EC Excellent clamping capability Very fast response time Low incremental surge resistance Available in uni-directional and bi-directional <div style="text-align: right; margin-top: 10px;">   RoHS COMPLIANT </div>
	<p>MECHANICAL DATA</p> <ul style="list-style-type: none"> Case: P-6. Epoxy meets UL 94V-0 flammability rating. Polatity: For uni-directional types the color band denotes cathode end, no marking on bi-directional types Terminals: Matte tin plated leads, solderable per MIL-STD-750 Method 2026, J-STD-002 and JESD22-B102. Consumer grade, meets JESD 201 class 1A whisker test.
	<p>TYPICAL APPLICATIONS</p> <p>Used in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.</p>

Maximun Ratings and Electrical Characteristics at 25 °C

P_{pp}	Peak pulse power with 10/1000 μ s exponential pulse	5000 W
$P_{M(AV)}$	Steady State Power Dissipation at $T_L = 75\text{ }^\circ\text{C}$ Mounted in copper leaf area of 20 mm ²	8 W
I_{FSM}	Non repetitive surge peak forward current (t = 10 msec.) (Note 1)	500 A
T_j	Operating temperature range	- 65 to + 175 °C
T_{stg}	Storage temperature range	- 65 to + 175 °C

Electrical Characteristics at Tamb = 25 °C

V_F	Max. forward voltage drop at $I_F = 100\text{A}$ (Note 1)	3.5 V
R_{thj-l}	Max. thermal resistance (l = 10 mm.)	10 °C/W


Note 1: Valid only for Unidirectional.

5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.

Ordering information

PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
5KP100A AMP	AMP	AMMO BOX	400	1.968
5KP100A TR	TR	14" diameter tape and reel	800	1.968

Package Outline Dimensions: (mm) P-6

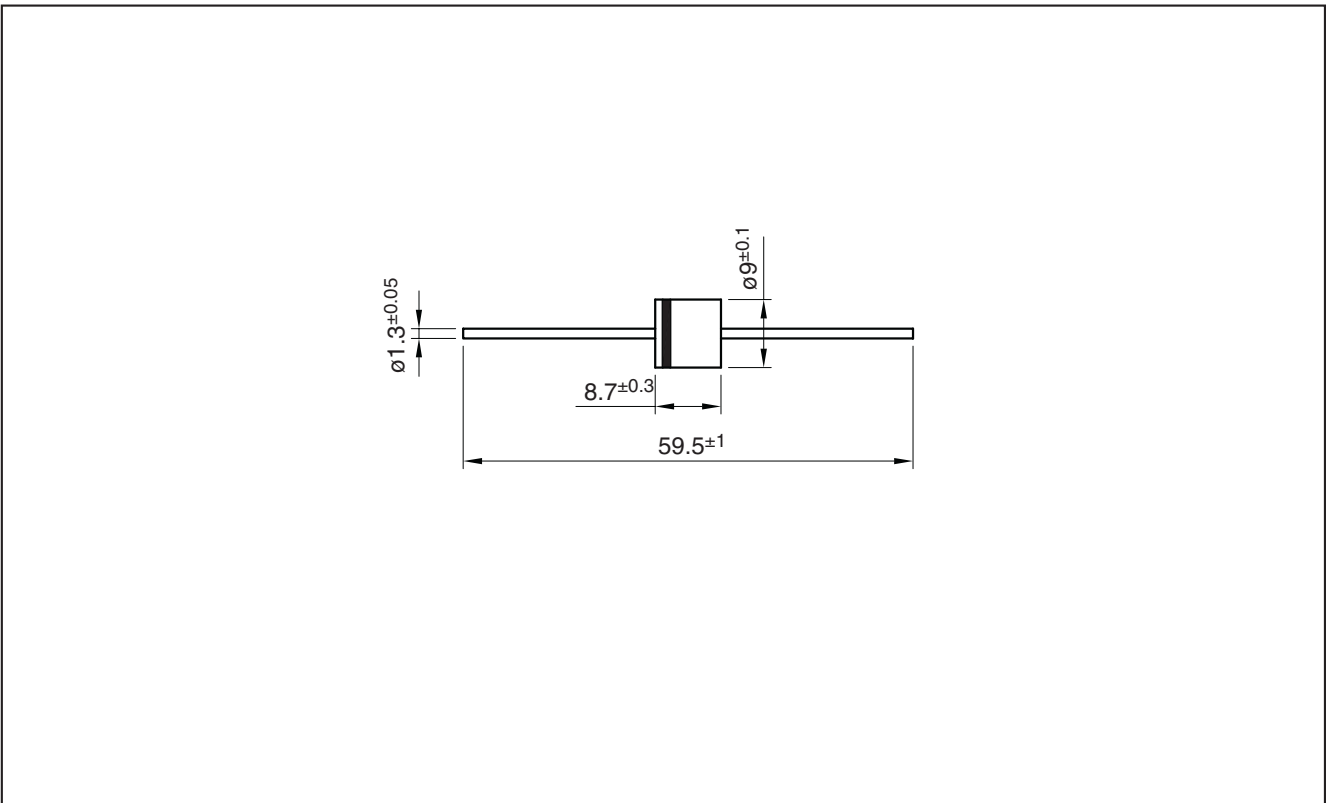

5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.

Type	Breakdown Voltage V_{BR} Volts (Note 1)		@ I_R (mA)	Maximum Reverse Leakage Current		Maximum Clamping Voltage		Maximum Temperature Coefficient of V_{BR} (%/°C)
	Min.	Max.		I_{RM} (μA)	V_{RM} (V)	V_{CL} (V) (Note 2)	I_{PP} (A)	
5KP7.5	8.33	10.20	5.0	250	7.5	14.3	350	+0.073
5KP7.5A	8.33	9.21	5.0	250	7.5	12.9	388	+0.073
5KP8.0	8.89	10.90	5.0	150	8.0	15.0	333	+0.075
5KP8.0A	8.89	9.83	5.0	150	8.0	13.6	367	+0.075
5KP8.5	9.44	11.50	5.0	50	8.5	15.9	314	+0.078
5KP8.5A	9.44	10.40	5.0	50	8.5	14.4	347	+0.078
5KP9.0	10.00	12.20	5.0	20	9.0	16.9	295	+0.081
5KP9.0A	10.00	11.10	5.0	20	9.0	15.4	325	+0.081
5KP10	11.10	13.60	5.0	15	10.0	18.8	266	+0.084
5KP10A	11.10	12.30	5.0	15	10.0	17.0	294	+0.084
5KP11	12.20	14.90	5.0	10	11.0	20.1	249	+0.086
5KP11A	12.20	13.50	5.0	10	11.0	18.2	274	+0.086
5KP12	13.30	16.30	5.0	10	12.0	22.0	227	+0.088
5KP12A	13.30	14.70	5.0	10	12.0	19.9	251	+0.088
5KP13	14.40	17.60	5.0	10	13.0	23.8	210	+0.090
5KP13A	14.40	15.90	5.0	10	13.0	21.5	232	+0.090
5KP14	15.60	19.10	5.0	10	14.0	25.8	194	+0.092
5KP14A	15.60	17.20	5.0	10	14.0	23.2	215	+0.092
5KP15	16.70	20.40	5.0	10	15.0	26.9	188	+0.094
5KP15A	16.70	18.50	5.0	10	15.0	24.4	206	+0.094
5KP16	17.80	21.80	5.0	10	16.0	28.8	176	+0.096
5KP16A	17.80	19.70	5.0	10	16.0	26.1	191	+0.096
5KP17	18.90	23.10	5.0	10	17.0	30.5	164	+0.097
5KP17A	18.90	20.90	5.0	10	17.0	27.6	161	+0.097
5KP18	20.00	24.40	5.0	10	18.0	32.2	155	+0.098
5KP18A	20.00	22.10	5.0	10	18.0	29.2	172	+0.098
5KP20	22.20	27.10	5.0	10	20.0	35.8	139	+0.099
5KP20A	22.20	24.50	5.0	10	20.0	32.4	154	+0.099
5KP22	24.40	29.80	5.0	10	22.0	39.4	127	+0.100
5KP22A	24.40	26.90	5.0	10	22.0	35.5	141	+0.100
5KP24	26.70	32.60	5.0	10	24.0	43.0	116	+0.101
5KP24A	26.70	29.50	5.0	10	24.0	38.9	128	+0.101
5KP26	28.90	35.30	5.0	10	26.0	46.6	107	+0.101
5KP26A	28.90	31.90	5.0	10	26.0	42.1	119	+0.101
5KP28	31.10	38.00	5.0	10	28.0	50.1	99	+0.102
5KP28A	31.10	34.40	5.0	10	28.0	45.4	110	+0.102
5KP30	33.30	40.70	5.0	10	30.0	53.5	93	+0.103
5KP30A	33.30	36.80	5.0	10	30.0	48.4	103	+0.103

NOTES:

1 V_{BR} measured after I_T = Square Wave Pulse or equivalent.

2. Surge Current waveform per Figure (Pulse Waveform) and Derate per Figure (Pulse Derating Curve).

5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.

Type	Breakdown Voltage V_{BR} Volts (Note 1)		@ I_R (mA)	Maximum Reverse Leakage Current		Maximum Clamping Voltage		Maximum Temperature Coefficient of V_{BR} (%/°C)
	Min.	Max.		I_{RM} (μ A)	V_{RM} (V)	V_{CL} (V) (Note 2)	I_{PP} (A)	
5KP33	36.70	44.90	5.0	10	33.0	59.0	85	+0.104
5KP33A	36.70	40.60	5.0	10	33.0	53.3	94	+0.104
5KP36	40.00	48.90	5.0	10	36.0	64.3	78	+0.104
5KP36A	40.00	44.20	5.0	10	36.0	58.1	85	+0.104
5KP40	44.40	54.30	5.0	10	40.0	71.4	70	+0.105
5KP40A	44.40	49.10	5.0	10	40.0	64.5	78	+0.105
5KP43	47.80	58.40	5.0	10	43.0	76.7	65	+0.105
5KP43A	47.80	52.80	5.0	10	43.0	69.4	72	+0.105
5KP45	50.00	61.10	5.0	10	45.0	80.3	62	+0.106
5KP45A	50.00	55.30	5.0	10	45.0	72.7	69	+0.106
5KP48	53.30	65.20	5.0	10	48.0	85.5	58	+0.106
5KP48A	53.30	58.90	5.0	10	48.0	77.4	65	+0.106
5KP51	56.70	69.30	5.0	10	51.0	91.1	55	+0.107
5KP51A	56.70	62.70	5.0	10	51.0	82.4	61	+0.107
5KP54	60.00	73.30	5.0	10	54.0	96.3	52	+0.107
5KP54A	60.00	66.30	5.0	10	54.0	87.1	57	+0.107
5KP58	64.40	78.70	5.0	10	58.0	103	49	+0.107
5KP58A	64.40	71.20	5.0	10	58.0	94	53	+0.107
5KP60		81.50	5.0	10	60.0	107	47	+0.108
5KP60A	66.70	73.70	5.0	10	60.0	97	52	+0.108
5KP64	71.10	86.90	5.0	10	64.0	114	44	+0.108
5KP64A	71.10	78.60	5.0	10	64.0	103	49	+0.108
5KP70	77.80	95.10	5.0	10	70.0	125	40	+0.108
5KP70A	77.80	86.00	5.0	10	70.0	113	44	+0.108
5KP75	83.30	102	5.0	10	75.0	134	37	+0.108
5KP75A	83.30	92.10	5.0	10	75.0	121	41	+0.108
5KP78	86.70	106	5.0	10	78.0	126	36	+0.108
5KP78A	86.70	95.80	5.0	10	78.0	126	40	+0.108
5KP85	94.40	115	5.0	10	85.0	151	33	+0.108
5KP85A	94.40	104	5.0	10	85.0	137	36	+0.110
5KP90	100	122	5.0	10	90.0	160	31	+0.110
5KP90A	100	111	5.0	10	90.0	146	34	+0.110
5KP100	111	136	5.0	10	100	179	28	+0.110
5KP100A	111	123	5.0	10	100	162	31	+0.110
5KP110	122	149	5.0	10	110	196	26	+0.112
5KP110A	122	135	5.0	10	110	177	28	+0.112
5KP130A	144	159	5.0	5	130	209	23.9	+0.112
5KP150	167	204	5.0	5	150	268	18.7	+0.112
5KP150A	167	185	5.0	5	150	243	20.6	+0.112
5KP180	200	245	1.0	5	180	340	15	+0.112
5KP180A	200	222	1.0	5	180	322	16	+0.112

NOTES:

- V_{BR} measured after I_T = Square Wave Pulse or equivalent.
- Surge Current waveform per Figure (Pulse Waveform) and Derate per Figure (Pulse Derating Curve).

5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.


Type	Breakdown Voltage V_{BR} Volts (Note 1)		@ I_R (mA)	Maximum Reverse Leakage Current		Maximum Clamping Voltage		Maximum Temperature Coefficient of V_{BR} (%/°C)
	Min.	Max.		I_{RM} (μA)	V_{RM} (V)	V_{CL} (V) (Note 2)	I_{PP} (A)	
5KP7.5C	8.33	10.20	5.0	250	7.5	14.3	350	+0.073
5KP8.0C	8.89	10.90	5.0	150	8.0	15.0	333	+0.075
5KP8.5C	9.44	11.50	5.0	50	8.5	15.9	314	+0.078
5KP9.0C	10.00	12.20	5.0	20	9.0	16.9	295	+0.081
5KP10C	11.10	13.60	5.0	15	10.0	18.8	266	+0.084
5KP11C	12.20	14.90	5.0	10	11.0	20.1	249	+0.086
5KP12C	13.30	16.30	5.0	10	12.0	22.0	227	+0.088
5KP13C	14.40	17.60	5.0	10	13.0	23.8	210	+0.090
5KP14C	15.60	19.10	5.0	10	14.0	25.8	194	+0.092
5KP15C	16.70	20.40	5.0	10	15.0	26.9	188	+0.094
5KP16C	17.80	21.80	5.0	10	16.0	28.8	176	+0.096
5KP17C	18.90	23.10	5.0	10	17.0	30.5	164	+0.097
5KP18C	20.00	24.40	5.0	10	18.0	32.2	155	+0.098
5KP20C	22.20	27.10	5.0	10	20.0	35.8	139	+0.099
5KP22C	24.40	29.80	5.0	10	22.0	39.4	127	+0.100
5KP24C	26.70	32.60	5.0	10	24.0	43.0	116	+0.101
5KP26C	28.90	35.30	5.0	10	26.0	46.6	107	+0.101
5KP28C	31.10	38.00	5.0	10	28.0	50.1	99	+0.102
5KP30C	33.30	40.70	5.0	10	30.0	53.5	93	+0.103
5KP33C	36.70	44.90	5.0	10	33.0	59.0	85	+0.104
5KP36C	40.00	48.90	5.0	10	36.0	64.3	78	+0.104
5KP40C	44.40	54.30	5.0	10	40.0	71.4	70	+0.105
5KP43C	47.80	58.40	5.0	10	43.0	76.7	65	+0.105
5KP45C	50.00	61.10	5.0	10	45.0	80.3	62	+0.106
5KP48C	53.30	65.20	5.0	10	48.0	85.5	58	+0.106
5KP51C	56.70	69.30	5.0	10	51.0	91.1	55	+0.107
5KP54C	60.00	73.30	5.0	10	54.0	96.3	52	+0.107
5KP58C	64.40	78.70	5.0	10	58.0	103	49	+0.107
5KP60C	66.70	81.50	5.0	10	60.0	107	47	+0.108
5KP64C	71.10	86.90	5.0	10	64.0	114	44	+0.108
5KP70C	77.80	95.10	5.0	10	70.0	125	40	+0.108
5KP75C	83.30	102	5.0	10	75.0	134	37	+0.108
5KP78C	86.70	106	5.0	10	78.0	126	36	+0.108
5KP85C	94.40	115	5.0	10	85.0	151	33	+0.108
5KP90C	100	122	5.0	10	90.0	160	31	+0.110
5KP100C	111	136	5.0	10	100	179	28	+0.110
5KP110C	122	149	5.0	10	110	196	26	+0.112
5KP150C	167	204	5.0	5	150	268	18.7	+0.112
5KP180C	200	245	1.0	5	180	340	15	+0.112

NOTES:


1 V_{BR} measured after I_T = Square Wave Pulse or equivalent.

2. Surge Current waveform per Figure (Pulse Waveform) and Derate per Figure (Pulse Derating Curve).


5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.

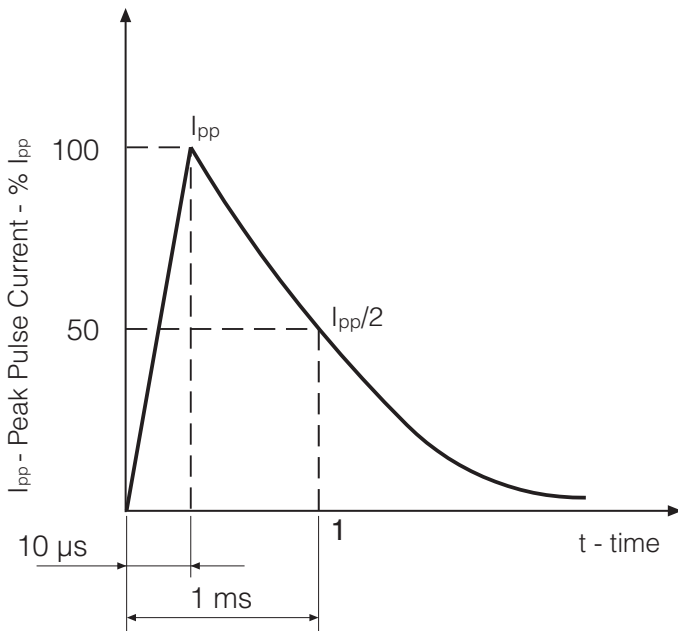

Pulse wave form 10/1000



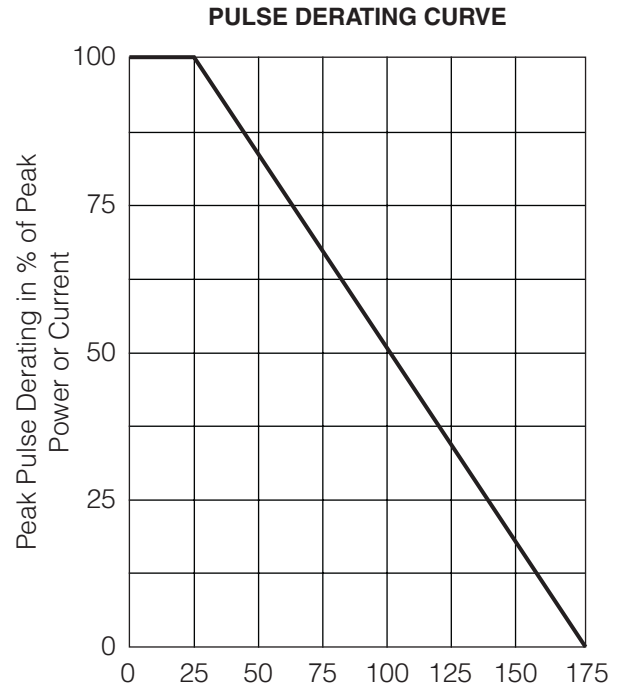


T_A , Ambient Temperature ($^{\circ}$ C)

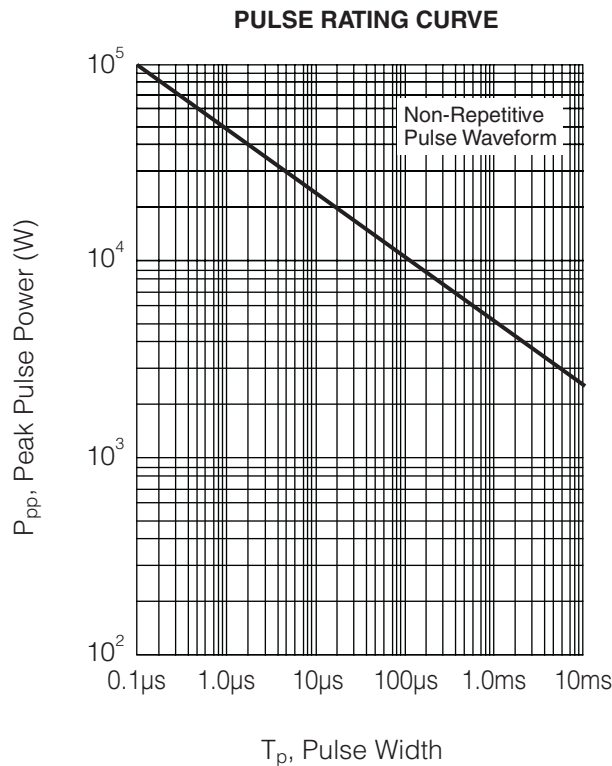

5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.

Ratings and Characteristics (Ta 25 °C unless otherwise noted)

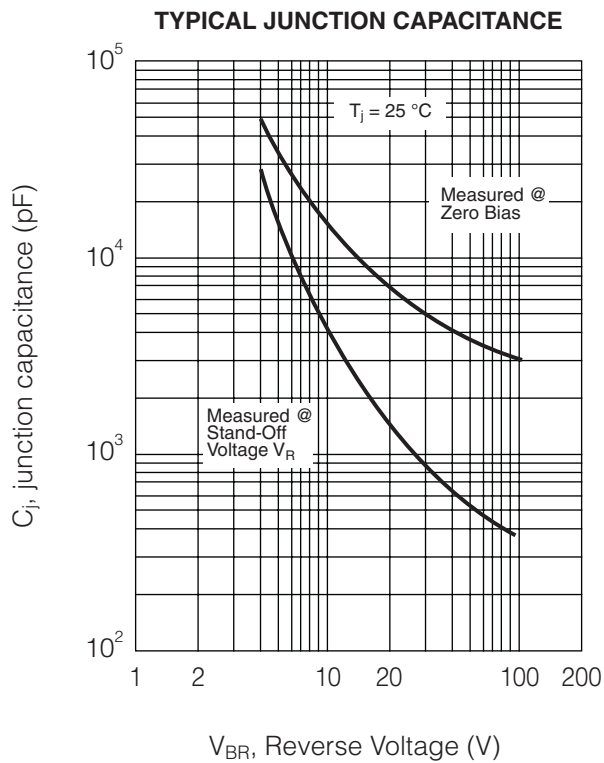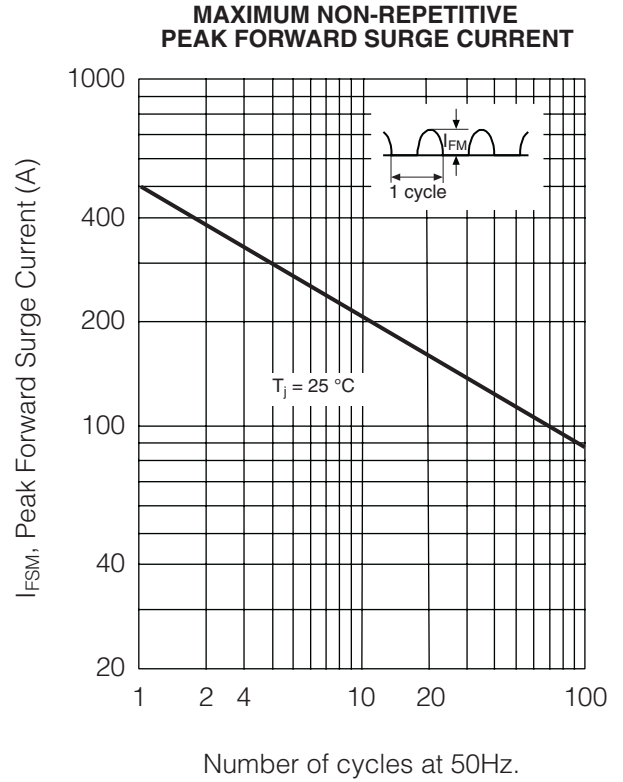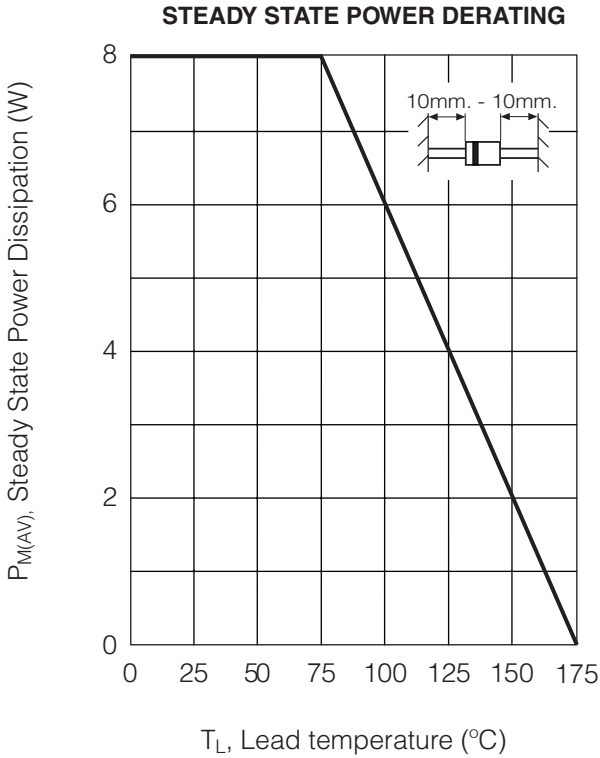

5000W Unidirectional and Bidirectional Load Dump Glass Passivated Automotive T.V.S.**Revision History**

Date	Revision	Description of Changes
10-Mar-2014	0	Original Data Sheet
12-Jul-2016	1	Format update

Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

Fagor Electrónica, S.Coop., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Fagor"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Fagor makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Fagor disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Fagor's knowledge of typical requirements that are often placed on Fagor products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Fagor's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Fagor products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Fagor product could result in personal injury or death. Customers using or selling Fagor products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Fagor and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Fagor or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Fagor personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Fagor, Product names and markings noted herein may be trademarks of their respective owners.