


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™

Dual / Single Diode Isolated Modules

100 Amperes / Up to 1600 Volts

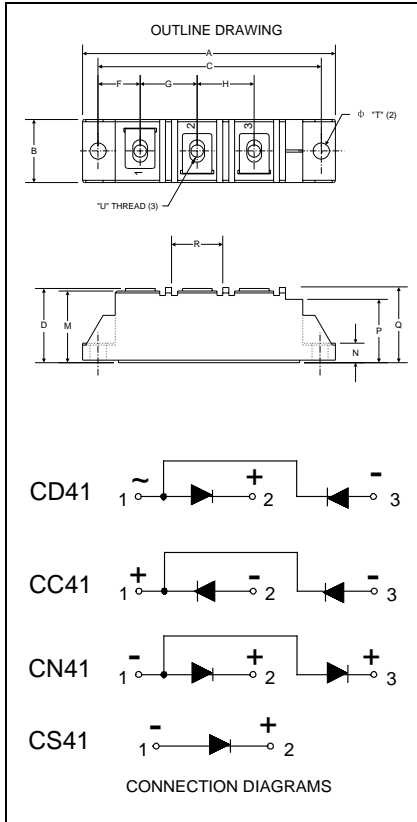

CD41, CN41, CC41, CS41 Dual Diode & Single Diode Pow-R-Blok™ Modules

100 Amperes to 1600 Volts

Description:

Powerex Dual Diode & Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- DBC Alumina (Al₂O₃) Insulator
- Glass Passivated Chips
- DBC Alumina (Al₂O₃) Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized (E78240)

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends
- Lighting Control
- Heat & Temperature Control
- Welders

C__41 Outline Dimensions

Dimension	Inches	Millimeters
A	3.62	92
B	0.81	20.5
C	3.15	80
D	1.18	30
F	0.59	15
G	0.79	20
H	0.79	20
M	1.14	29
N	0.24	6.1
P	0.94	24
R	0.71	18
T	0.25	6.3
U	M5	M5

Note: Dimensions are for reference only.

Ordering Information:

Example: Select the complete eight-digit module part number from the table below.

Example: CD411699 is a 1600 Volt, 100 Ampere Dual Diode Isolated POW-R-BLOK™ Module

Type	Voltage Volts (x100)	Current Amperes (x1)
CD41	08	99 (100A)
CN41	12	
CC41	14	
CS41	16	



CD61__99, CC41__99

CN61__99, CS61__99

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual / Single Diode Isolated Modules
100 Amperes / Up to 1600 Volts

Absolute Maximum Ratings

Characteristics	Conditions	Symbol		Units
Repetitive Peak Reverse Blocking Voltage		V_{RRM}	up to 1600	V
Non-Repetitive Peak Reverse Blocking Voltage		V_{RSM}	$V_{RRM} + 100$	V
<i>(t < 5 msec)</i>				
RMS Forward Current	DC Conduction, $T_C=90^{\circ}C$	$I_{F(RMS)}$	157	A
Average Forward Current	180° Conduction, $T_C=100^{\circ}C$	$I_{F(AV)}$	100	A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	1,780	A
	60 Hz, No V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	2,110	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	1,700	A
	50 Hz, No V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	2,020	A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	1,310	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	1,250	A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	940	A
	50 Hz, 100% V_{RRM} reapplied, $T_J = 150C$	I_{FSM}	900	A
I^2t for Fusing for One Cycle	8.3 ms, 100% V_{RRM} reapplied, $T_J = 150C$	I^2t	13,190	$A^2 \text{ sec}$
	8.3 ms, No V_{RRM} reapplied, $T_J = 150C$	I^2t	18,650	$A^2 \text{ sec}$
	10 ms, 100% V_{RRM} reapplied, $T_J = 150C$	I^2t	14,450	$A^2 \text{ sec}$
	10 ms, No V_{RRM} reapplied, $T_J = 150C$	I^2t	20,430	$A^2 \text{ sec}$
Operating Temperature		T_J	-40 to +150	$^{\circ}C$
Storage Temperature		T_{stg}	-40 to +150	$^{\circ}C$
Max. Mounting Torque, M6 Mounting Screw on Terminals			25	in. – Lb.
			3	Nm
Max. Mounting Torque, Module to Heatsink			44	in. – Lb.
			5	Nm
Module Weight, Typical			83	g
			3	Oz
V Isolation @ 25C	50-60 Hz, 1 second	V_{rms}	3500	V
Circuit To Base, All Terminals Shorted Together				



CD41__99, CC41__99

CN41__99, CS41__99

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual / Single Diode Isolated Modules
100 Amperes / Up to 1600 Volts

Electrical Characteristics, T_J=25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	I _{RRM}	Up to 1600V, T _J =150°C		10	mA
Peak On-State Voltage	V _{FM}	T _J =25C, I _{FM} =315A, 180° Conduction		1.45	V
Threshold Voltage, Low-level	V _{(FO)1}	T _J = 150°C, I = 16.7% x I _{F(AV)} to I _{F(AV)}		0.79	V
Slope Resistance, Low-level	r _{T1}			1.78	mΩ
Threshold Voltage, High-level	V _{(FO)2}	T _J = 150°C, I = I _{F(AV)} to I _{FSM}		0.87	V
Slope Resistance, High-level	r _{T2}			1.57	mΩ
V _{TM} Coefficients, Full Range		T _J = 150°C, I = 15%I _{F(AV)} to I _{FSM}	A =	7.72E-01	
			B =	1.22E-02	
		V _{TM} = A+ B Ln I +C I + D Sqrt I	C =	1.57E-03	
			D =	-2.76E-05	

Thermal Characteristics

Characteristics	Symbol		Max.	Units
Thermal Resistance, Junction to Case	R _{θJ-C}	Per Module, both conducting Per Junction, both conducting	0.175 0.35	°C/W °C/W
Thermal Impedance Coefficients	Z _{θJ-C}	Z _{θJ-C} = K ₁ (1-exp(-t/τ ₁)) + K ₂ (1-exp(-t/τ ₂)) + K ₃ (1-exp(-t/τ ₃)) + K ₄ (1-exp(-t/τ ₄))	K ₁ = 9.82 E+1 K ₂ = -1.11 E+2 K ₃ = 1.32 E+1 K ₄ = 2.72 E-1	τ ₁ = 4.60 E-3 τ ₂ = 4.65 E-3 τ ₃ = 5.05 E-3 τ ₄ = 0.1398
Thermal Resistance, Case to Sink Lubricated	R _{θC-S}	Per Module	0.1	°C/W




CD41__99, CC41__99

CN41__99, CS41__99


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724)925-7272

Dual / Single Diode Modules
100 Amperes / up to 1600 Volts


Maximum On-State Forward Voltage Drop
($T_j = 150^\circ\text{C}$)

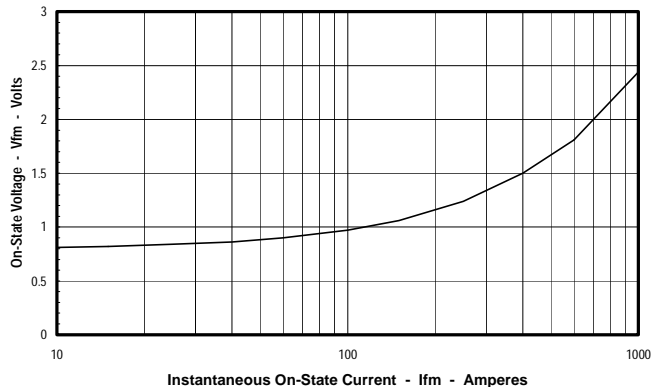


Maximum Transient Thermal Impedance
(Junction to Case)

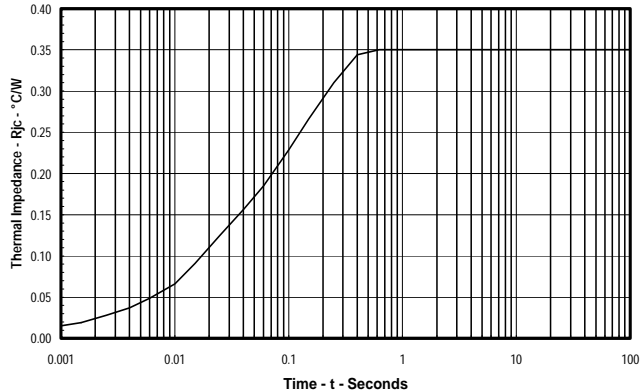


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

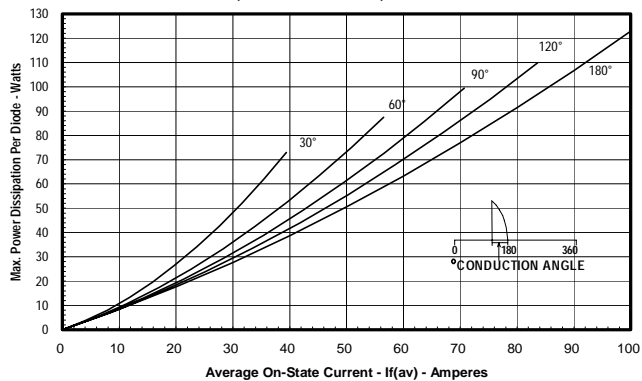

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

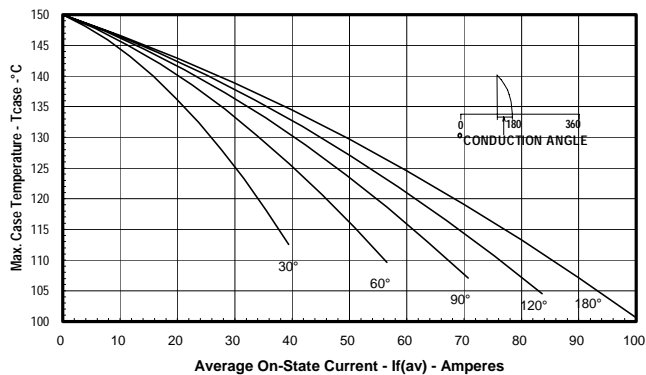

Maximum On-State Power Dissipation
(Rectangular Waveform)

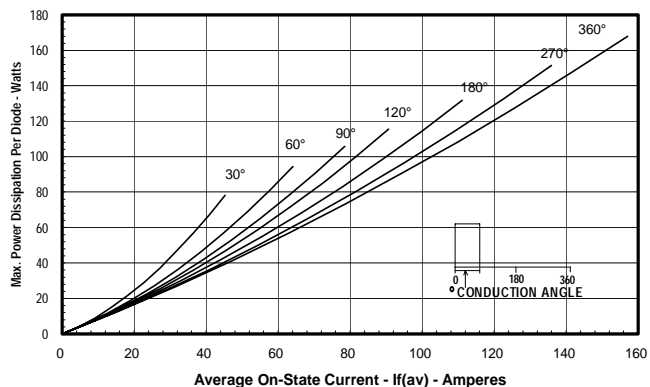

Maximum Allowable Case Temperature
(Rectangular Waveform)

