
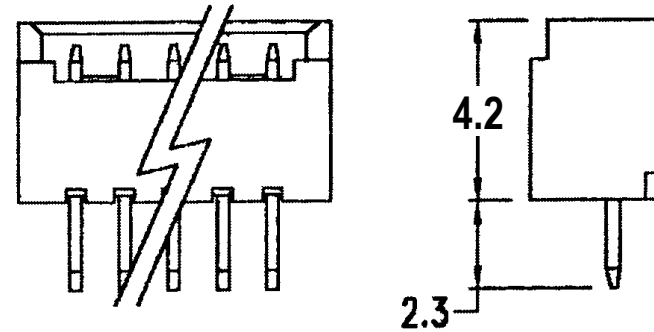


SPECIFICATIONS



Current rating: 1 amp (0.8amps for 32AWG)
 Voltage rating: 125 volts
 Contact material: Phosphor bronze
 Contact plating: Tin
 Contact resistance: 20 milliohms max.
 Body material: Nylon 66, UL94V-0
 Insulation resistance: 100 megohms min.
 Withstanding: 250VAC for 1min.
 Operating temperature: -40°C to +85°C

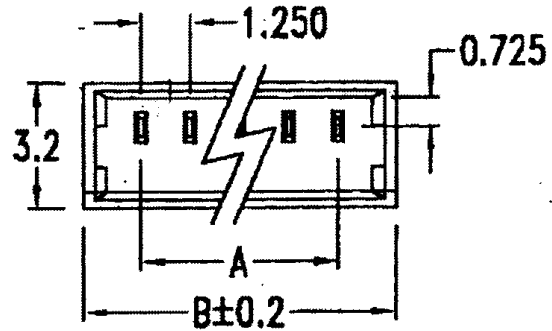

P.C. Board Hole Dimension

Dimensions (±0.03)		
Pos.	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date	 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919
				Approved	Howard	08/10/99	
				Checked	Lizzy	08/10/99	
				Drawn	Tina	08/10/99	
				0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'			Part No.: JS-A-9847-XX
				 UNIT: mm			Description: Wire to board header, .049" (1.25mm) pitch