
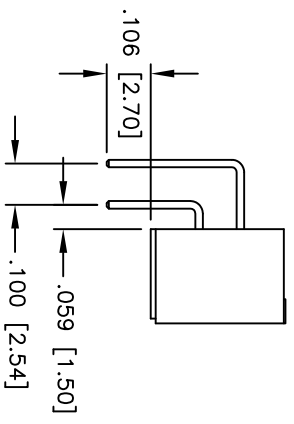
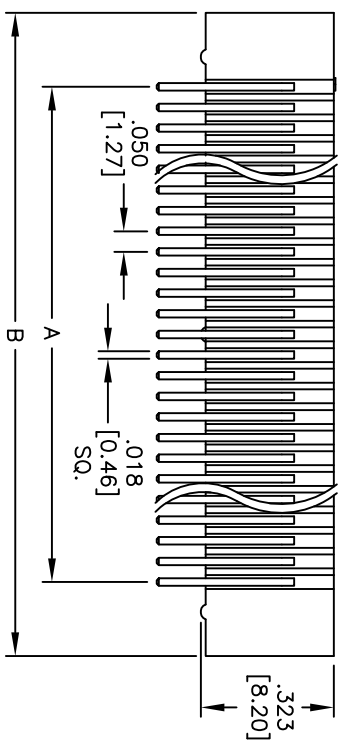
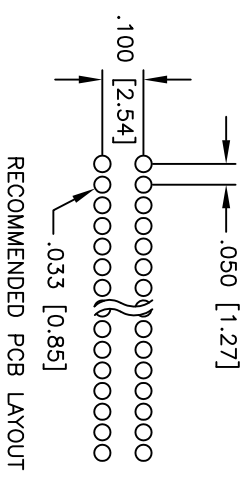


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/01/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

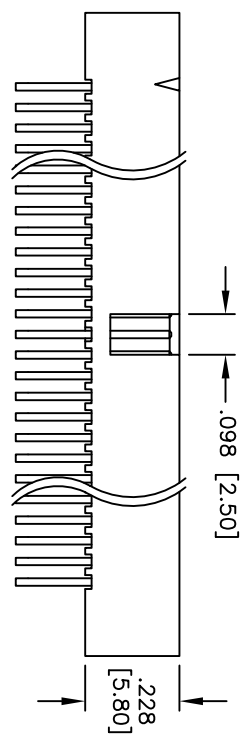

**SPECIFICATIONS:**  
 Material: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating: Gold flash over Nickel underplate overall

**Electrical:**  
 Operating voltage: 250 VAC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 5,000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds



Positions: 8, 10, 20, 26, 30, 34, 40, 44, 50, 60, 68, 80, 100  
 A = .050 [1.27] x No. of Spaces  
 B = .050 [1.27] x No. of Spaces + .366 [9.29]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
X ± .10	ØXX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE
10/01/10	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" x .100" BOX HEADER, GOLD PLATED, RIGHT ANGLE MOUNT, PCB TYPE

DRAWN	DATE
DY	10/01/10

CHECKED	DATE

APPROVED	DATE

SIZE	PART NO.	REV.
X	HBHR-A1-XX-H-G	-

REF.	SCALE	SHEET
S0004TT	NTS	1 OF 1