

P.C.B LAYOUT

H918-XXXX-XXX-Z

Double Row 1.27 x 1.27mm, Double Insulator
(THRU HOLE, RIGHT ANGLE, INSULATORS ON 2 PLANES)

DIMENSION NUMBER	A	B	C	D	Customer
0060	3.00	2.50	4.95	5.80	N/A
0061	3.00	2.50	4.20	4.67	N/A

* Other Sizes Available - Please Contact SMP Technology, Inc.


ELECTRICAL:

CURRENT RATING: 1A
CONTACT RESISTANCE: < 30m Ω
INSULATOR RESISTANCE: > 1000M Ω
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40°C TO +125°C

MATERIAL:

INSULATOR: GLASS FILLED POLYESTER, NYLON 6T (260° C FOR 10 SECONDS, UL 94V-0)
CONTACT MATERIAL: COPPER ALLOY

HOW TO ORDER:

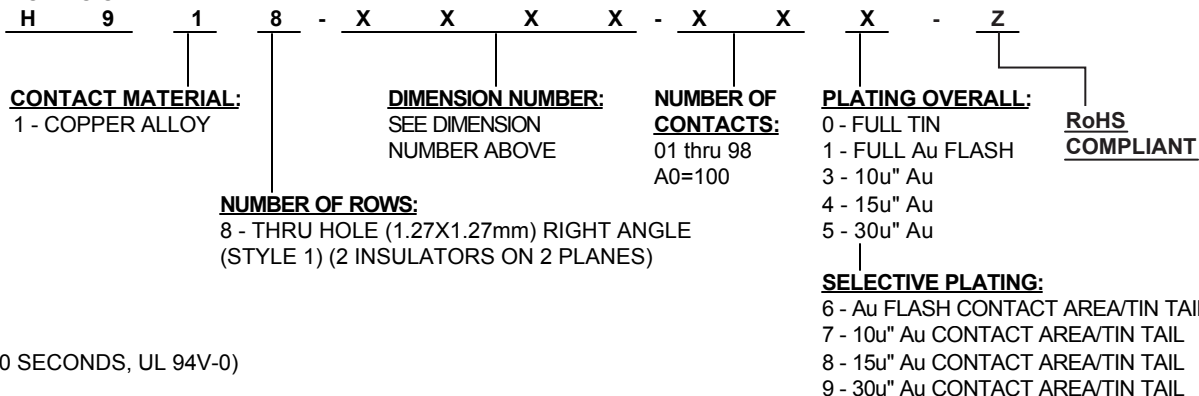

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	03/13/08	
Pin Header, Double Row, 1.27x1.27mm, Double Insulator, Thru Hole, Right Angle (Insulators on 2 Planes)						
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	SERIES: H 9 1 8 - X X X X - X X X - Z Pg: 1