

SPECIFICATIONS

Header Connector

Mechanical

Contact Retention Force: 0.05Kgf min.

Electrical

Voltage Rating: 125 V

Current Rating: 1.0A per pin

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 100MΩ min.

Physical

Housing: Thermoplastic, UL 94V-0 rating in ivory color

Contact: Copper Alloy

Plating: See "ORDERING INFORMATION"


Operating Temperature: -40°C to +105°C

HS88***-S4Series


SMT Type ,R/A

Plug

1.25mm [.049"] Pitch



DRAWING

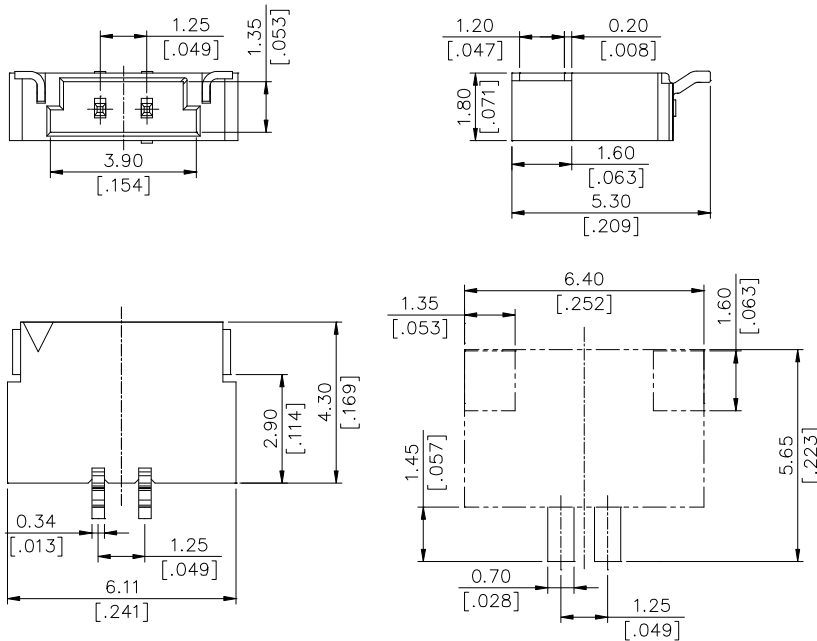

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05

ORDERING INFORMATION

PRODUCT No. : H S 8 8 ** * - * S4	
Header _____	MODIFICATION CODE
SMT Header _____	HOUSING COLOR CODE
Termination&Contact Type _____	NONE : HOUSING COLOR IVORY
NO. OF SINGLE ROW POS. _____	B : HOUSING COLOR BLACK
02 = 2 POS.	CONTACT AREA PLATING CODE
03 = 3 POS.	E = TIN PLATING WITH RoHS COMPLIANCE
:	F = GOLD FLASH WITH RoHS COMPLIANCE
	H = 30u" GOLD WITH RoHS COMPLIANCE
	V = 15u" GOLD WITH RoHS COMPLIANCE