

# 2.0mm (0.079") Female Header

For "V" Row, Board to Board Contacts  
120 Contacts, Straight

1067 Series

## APPLICATION AND FEATURES




1. Low Profile: 6.3mm height.
2. High quality dual beam phosphor bronze contacts.
3. Designed for board to board small spacing interconnection.
4. Standoffs facilitate post soldering clean.
5. Mating with 2.0mm pitch □ 0.5mm Pin Headers such as 1068 series.

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Contact resistance: 20 m ohm Max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: P.P.S

Recommended P.C.Board

Hole Layout

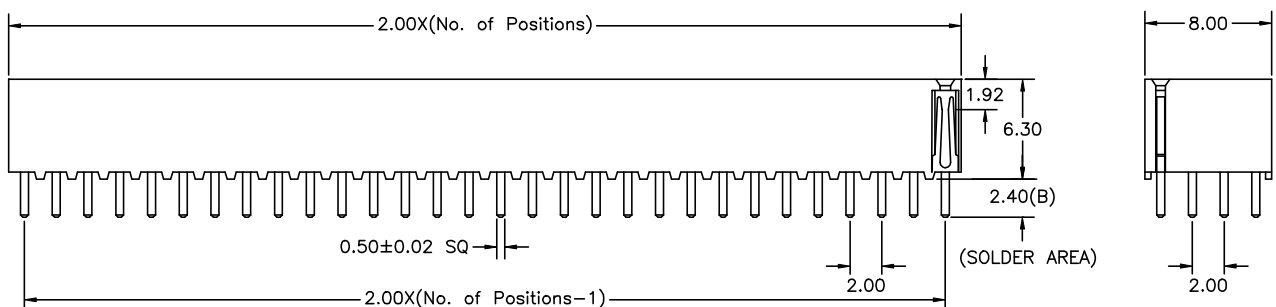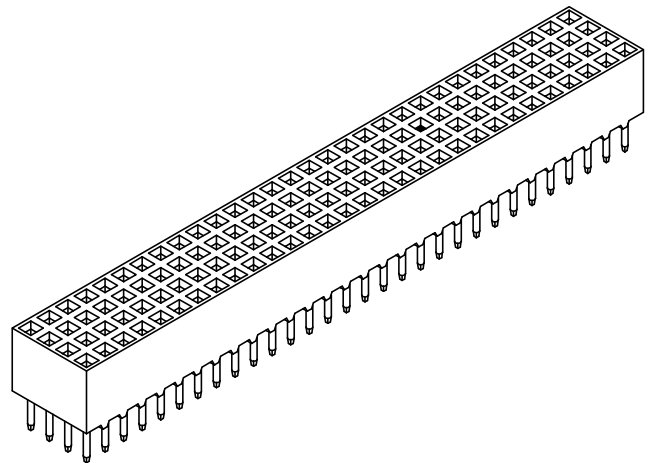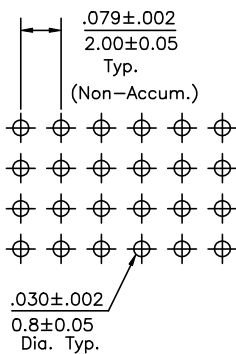

## Order Information 1067 Series

Example: 1067-120-S-02-B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1067	24 to 120 Contacts	Straight S	Tin Plated 01	B
			Gold Plated	2.4
			Flash 02	
			10 μ" 10	
			30 μ" 30	