




MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

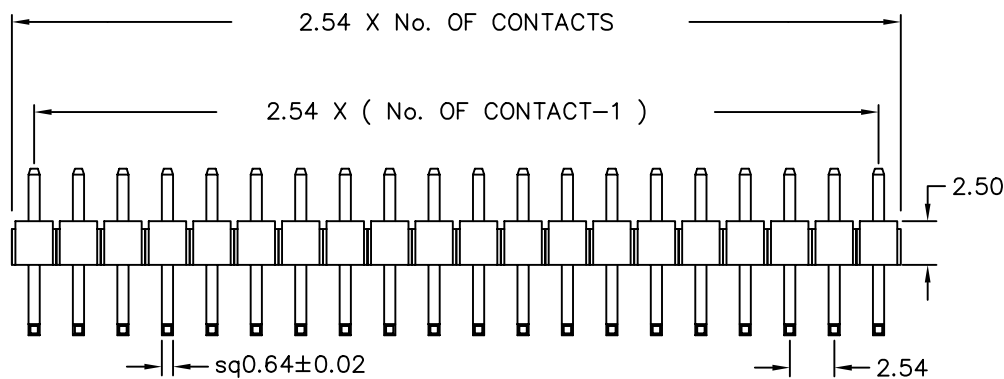

Recommended P.C.B Layout

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. H-R-1Xxx

DWG NO. H-R-1Xxx

APPROVED BY CY

TOLERANCES ARE

DESCRIP TION:

PIN HEADER 2.54*2.54mm
 RIGHT ANGLE TYPE, SINGLE ROW
 OPPOSITE INSULATOR

FILE NO. PH1R0-1XXGB 30/60/62

DRAWING BY

.X ± 0.3
 .XX ± 0.2
 .XXX
 AWG

AREA

REVISIONS

HK

DATE

煜倫有限公司

UNIT / mm

SCALE 1:1

PROJECTION

