


2141 Series

P.C.B. Socket 2.0mmX2.0mm(0.079"X0.079")

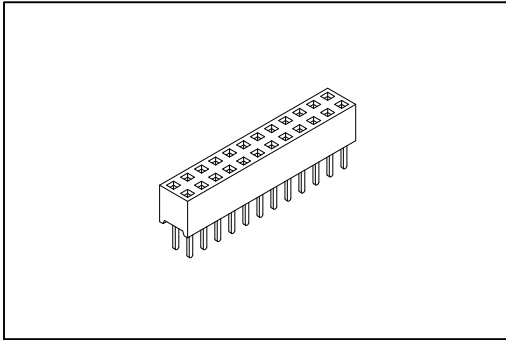

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 500V.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -55°C~+105°C.



Features:

* Double row Straight Type.

* Low profile 4.5mm(0.177").

* Mates with 0.50mm(0.02") square pin.

Mates with: 2111,2112,2113,2114,2115,3112

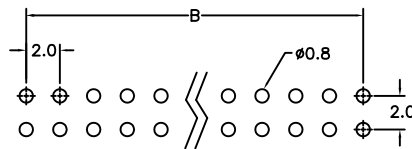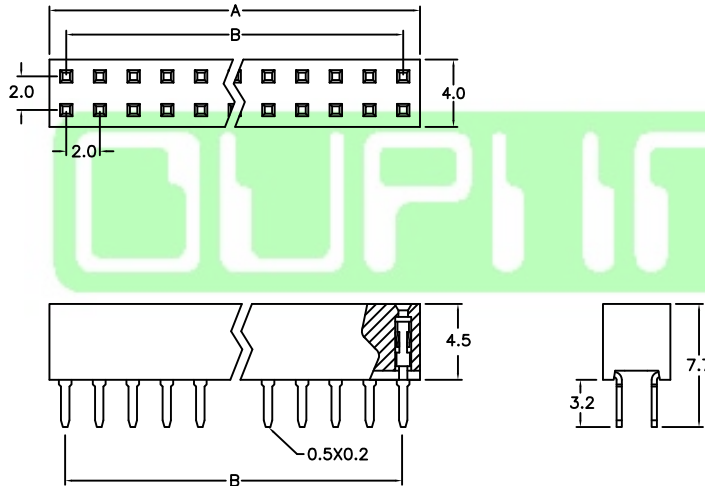

P.C. Board Layout

Position Dimension	4 Thru 80
A	2.0 X No. of Positions /2
B	2.0 X No. of Positions /2-2.0

Ordering information

2141-

Series

2

Double Row

X

40

No.of Pin Per Row

G

G: Gold Plated

00

00: G/F

S

S: Straight

A

A: Tray Package