
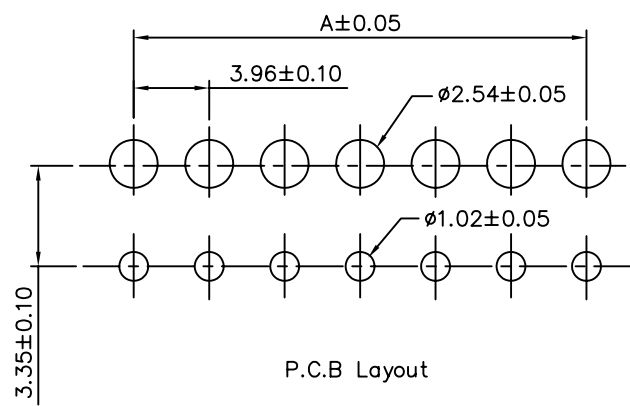
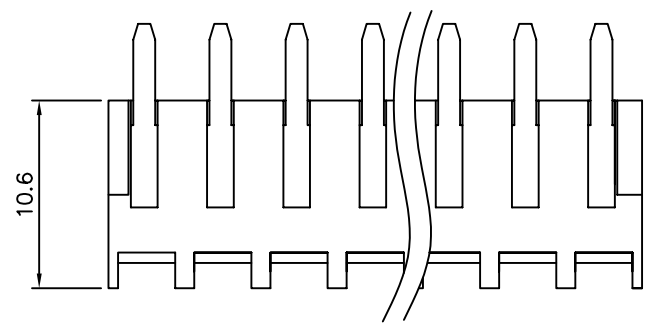



△ SPECIFICATIONS
 Current Rating: 5A Max.
 Voltage Rating: 250V AC Max.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 10 Milliohms Max.
 Dielectric Withstanding Voltage: 1500V AC
 Temperature: -40°C To +105°C
 Contact: Brass
 Housing: Nylon, UL 94V-2
 Plating: Tin Plated
 RoHS Compliant

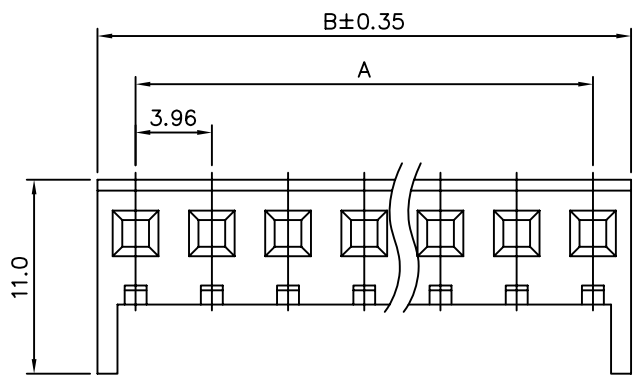

Contact	Dim.A	Dim.B
02	3.96	8.06
03	7.92	12.02
04	11.88	15.98
05	15.84	19.94
06	19.80	23.90
07	23.76	27.86
08	27.72	31.82
09	31.68	35.78
10	35.64	39.74
11	39.60	43.70
12	43.56	47.66
13	47.52	51.62
14	51.48	55.58
15	55.44	59.54
16	59.40	63.50

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.10 ANG.
PART No. KXXXB-H		CHECKED BY BECKY		
DRAWING No. KXXXB-H		DRAWING BY TCF		
SCALE	NONE	REV.	A1	
		UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Spec.	BECKY	06/16/2005
△ A0		NEW RELEASE	BECKY	05/27/2005