

SPECIFICATIONS

Header Connector

Mechanical

Contact Retention Force: 1.36Kgf min. Per Pin

Electrical

Voltage Rating: 250V

Current Rating: 3.0A max. per pin

Dielectric Withstanding Voltage: 750V AC

Insulation Resistance: 1000MΩ min.

Physical


Housing: LCP, UL 94V-0

Contact: BRASS




Plating: See "ODERING INFORMATION"

Operating Temperature: -40°C to +105°C

HD58 Series
Header, T/H Type
Plug
2.00mm [.079"] Pitch

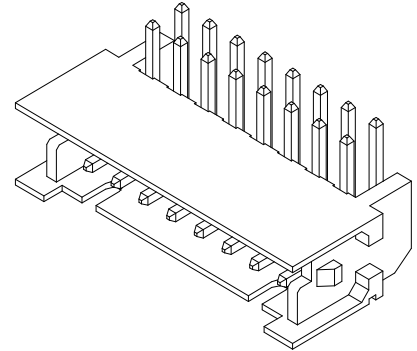

DRAWING

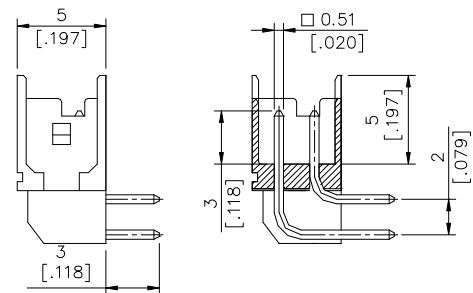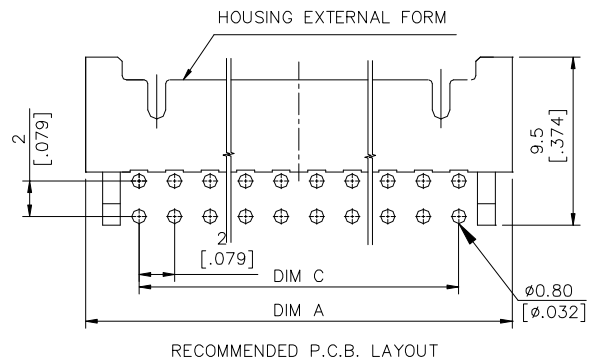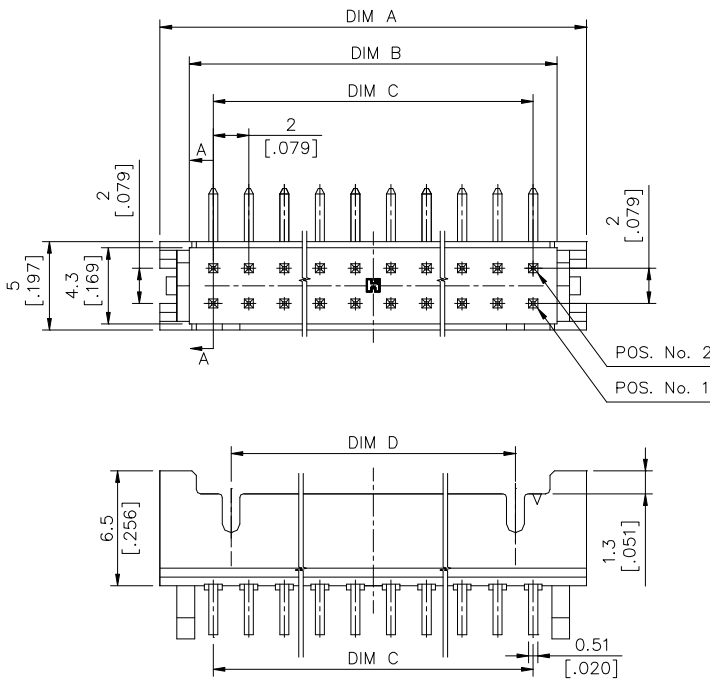

ORDERING INFORMATION

PRODUCT No: HD 58 *** - *** - **

- NO. Of Pos. ————
- 02=02 POS.
- 20=40 POS.
- Contact Area Plating ————
- 0 = TIN PLATING
- Housing Color
- A: NATURE
- B: BLACK
- RoHS Code
- F = RoHS PRODUCT
- Package Type
- E = BAG
- PIN Removed
- C0: FULL PIN
- C1: 1st REMOVED
- C2: 2nd REMOVED
- Post Type
- 1: WITH PLASTIC POST
- 2: WITHOUT POST

HD5815*-****-**	15/30	34.00	30.70	28.00	26.00
HD5814*-****-**	14/28	32.00	28.70	26.00	24.00
HD5813*-****-**	13/26	30.00	26.70	24.00	22.00
HD5812*-****-**	12/24	28.00	24.70	22.00	20.00
HD5811*-****-**	11/22	26.00	22.70	20.00	18.00
HD5810*-****-**	10/20	24.00	20.70	18.00	16.00
HD5809*-****-**	9/18	22.00	18.70	16.00	14.00
HD5808*-****-**	8/16	20.00	16.70	14.00	12.00
HD5807*-****-**	7/14	18.00	14.70	12.00	10.00
HD5806*-****-**	6/12	16.00	12.70	10.00	8.00
HD5805*-****-**	5/10	14.00	10.70	8.00	6.00
HD5804*-****-**	4/8	12.00	8.70	6.00	4.00
PART NO.	NO. OF POS.	DIM. A	DIM. B	DIM. C	DIM. D