


# Schottky PowerMod

## CPT60035 — CPT60045

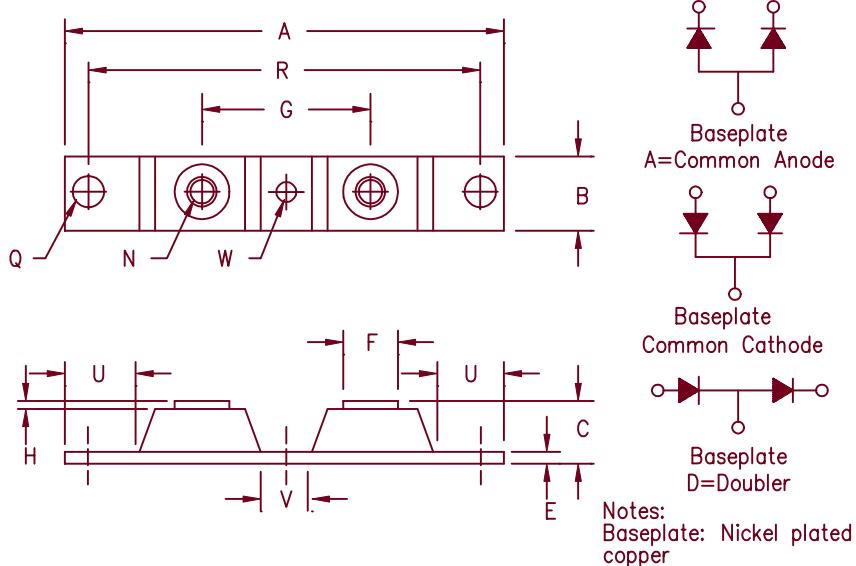

Dim.		Inches	Millimeters			
		Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20		
B	0.700	0.800	17.78	20.32		
C	---	0.680	---	17.28		
E	0.120	0.130	3.05	3.30		
F	0.490	0.510	12.45	12.95		
G	1.375	BSC	34.92	BSC		
H	0.010	---	0.25	---		
N	---	---	---	---		1/4-20
Q	0.275	0.290	6.99	7.37		Dia.
R	3.150	BSC	80.01	BSC		
U	0.600	---	15.24	---		
V	0.312	0.340	7.92	8.64		
W	0.180	0.195	4.57	4.95		Dia.

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT60035*	MBRP60035CTL	35V	35V	
CPT60040*		40V	40V	
CPT60045*		45V		45V

\*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 600 Amperes/35 to 45 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

### Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 600 Amps	T <sub>C</sub> = 130°C, Square wave, R <sub>θJC</sub> = 0.10°C/W
Average forward current per leg	I <sub>F(AV)</sub> 300 Amps	T <sub>C</sub> = 130°C, Square wave, R <sub>θJC</sub> = 0.20°C/W
Maximum surge current per leg	I <sub>FSM</sub> 6000 Amps	8.3ms, half sine, T <sub>J</sub> = 175°C
Maximum repetitive reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHZ, 25°C, 1 usec square wave
Max peak forward voltage per leg	V <sub>FM</sub> 0.65 Volts	I <sub>FM</sub> = 300A: T <sub>J</sub> = 25°C
Max peak forward voltage per leg	V <sub>FM</sub> 0.52 Volts	I <sub>FM</sub> = 300A: T <sub>J</sub> = 175°C
Max peak reverse current per leg	I <sub>RM</sub> 75 mA	V <sub>RRM</sub> , T <sub>J</sub> = 125°C*
Max peak reverse current per leg	I <sub>RM</sub> 8.0 mA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical junction capacitance per leg	C <sub>J</sub> 14000 pF	V <sub>R</sub> = 5.0V, T <sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 175°C
Max thermal resistance per leg	R <sub>θJC</sub>	0.20° C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.10° C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.08° C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole) center hole must be torqued first		8–10 inch pounds
Weight		2.8 ounces (78 grams) typical



800 Hoyt Street  
Broomfield, CO 80020  
PH: (303) 469-2161  
FAX: (303) 466-3775  
[www.microsemi.com](http://www.microsemi.com)

# CPT60035 – CPT60045

Figure 1  
Typical Forward Characteristics – Per Leg

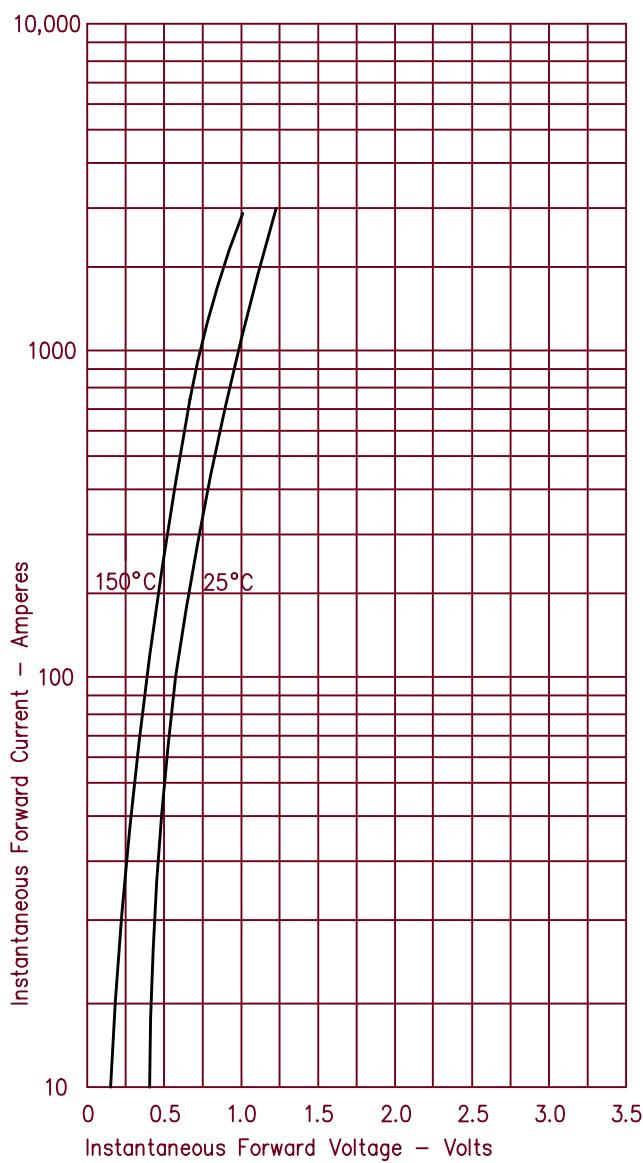


Figure 2  
Typical Reverse Characteristics – Per Leg

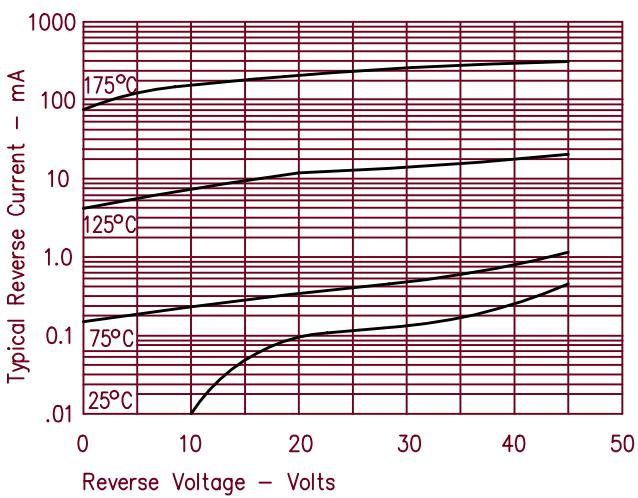


Figure 3  
Typical Junction Capacitance – Per Leg

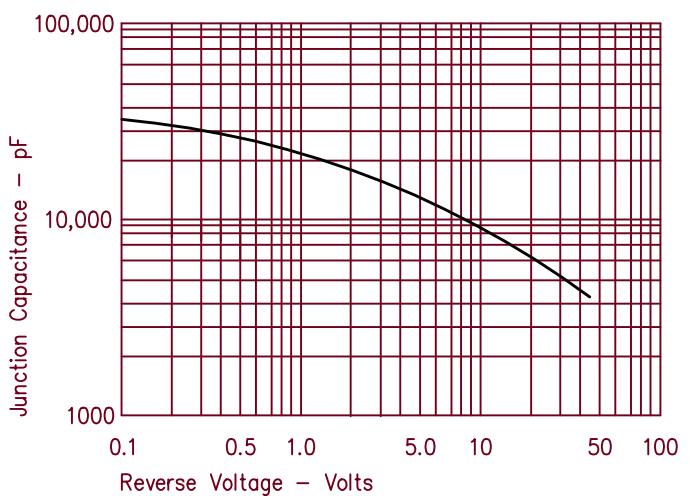


Figure 4  
Forward Current Derating – Per Leg

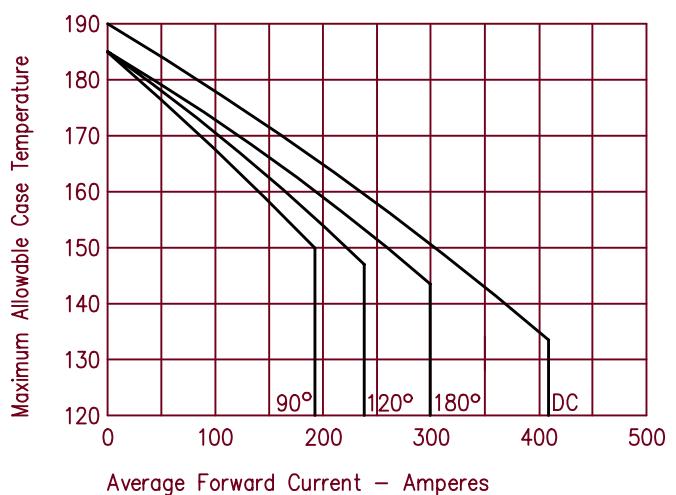


Figure 5  
Maximum Forward Power Dissipation – Per Leg

