

REVISION CT
DO NOT SCALE
FROM THIS PRINT

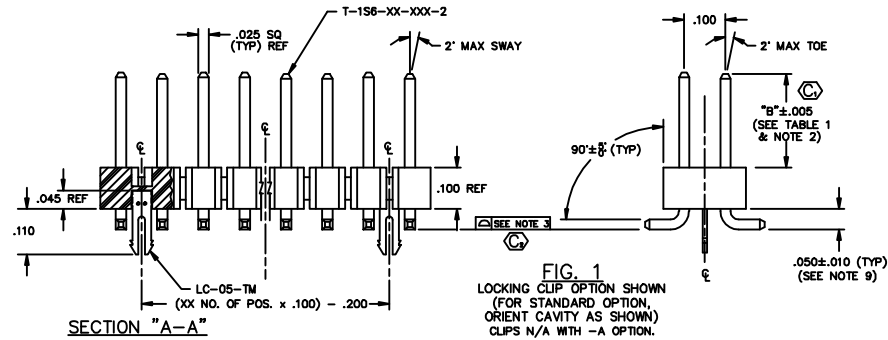

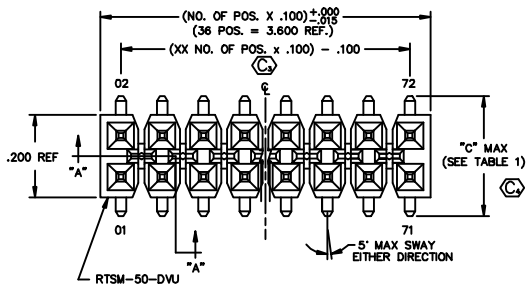


FIG. 1
LOCKING CLIP OPTION SHOWN
(FOR STANDARD OPTION,
ORIENT CAVITY AS SHOWN)
CLIPS N/A WITH -A OPTION.

UNLESS OTHERWISE NOTED TOLERANCES ARE IN INCHES
ONE PLACE DECIMALS ±.1
TWO PLACE DECIMALS ±.01
THREE PLACE DECIMALS ± .005
FOUR PLACE DECIMALS ± .0020
ANGLES ± 2°
TITLE
DOUBLE ROW,
GULLWING ASM.
DWG NO.
TSM-1XX-XX-XXX-XX-X-XXX-X
SHEET 1 OF 2

TSM-1XX-XX-XXX-XX-X-XXX-X

NO. OF POSITIONS
-02 THRU -50
-TM/-TV (-02 THRU -30 ONLY)

LEAD STYLE
(SEE TABLE 1)

PLATING SPEC.
-T: TIN -SPECIFY -T IN TERMINAL SUFFIX -X
-S: SELECTIVE -SPECIFY -S IN TERMINAL SUFFIX -X
-G: GOLD -SPECIFY -G IN TERMINAL SUFFIX -X
-L: SELECTIVE -SPECIFY -L IN TERMINAL SUFFIX -X
-TL: TIN/LEAD -SPECIFY -TL IN TERMINAL SUFFIX -XX (AVAILABLE ONLY ON LEAD STYLES -01, -02 & -04)
-STL: SELECTIVE TIN/LEAD -SPECIFY -STL IN TERMINAL SUFFIX -XXX (AVAILABLE ONLY ON LEAD STYLES -01, -02 & -04)
-F: FLASH SELECTIVE -SPECIFY -F IN TERMINAL SUFFIX -X
-H: HEAVY GOLD -SPECIFY -H IN TERMINAL SUFFIX -X
-P: GOLD FLASHED PALLADIUM NICKEL -SPECIFY -P IN TERMINAL SUFFIX -X
-TM: MATTE TIN -SPECIFY -TM IN TERMINAL SUFFIX -XX
-SM: SELECTIVE HEAVY GOLD, MATTE TIN TAIL -SPECIFY -SM IN TERMINAL SUFFIX -XX
-LM: SELECTIVE LIGHT GOLD, MATTE TIN TAIL -SPECIFY -LM IN TERMINAL SUFFIX -XX
-FM: FLASH SELECTIVE GOLD, MATTE TIN TAIL -SPECIFY -FM IN TERMINAL SUFFIX -XX

MOUNT STYLE
-DV: DOUBLE VERTICAL
-TV: TRIPLE VERTICAL (USE HTSW-50-T-LOP) (SEE NOTE 11)
* -TM: TRIPLE MIXED TECHNOLOGY (USE HTSW-50-T-LOP)
* = USE -01 LEAD STYLE ONLY

OPTION #1
(OPTIONS N/A FOR -TV AND AND -TM MOUNT STYLES)
-P: PICK & PLACE PAD (USE MPP-06 (SEE FIG. 3) (AVAILABLE ON POS -02 & -03 WITH -TR OPTION ONLY, SEE NOTE 8)
-M: METAL PICK & PLACE PAD (USE LMP-01 or MPP-01 (SEE FIG. 4) (NOT RECOMMENDED FOR -P OR -SM PLATING))
(LEAD STYLES -01 & -04 ONLY) (AVAILABLE ON POS -04 THRU 36) (AVAILABLE ON POS -02 & -03 WITH -TR OPTION ONLY, SEE NOTE 8)
-TR: TAPE AND REEL (SEE FIG. 7) (-02 THRU -28 POS)

OPTION #2
POLARIZED POSITION
SPECIFY OMITTED PIN
(AVAILABLE FOR -DV MOUNT STYLE ONLY)

OPTION #3 (SEE FIG. 1)
-LC: LOCKING CLIP (USE LC-05-TM03-36 POS USE 2 PER STRIP) (02 POS USE 1 PER STRIP) (USE RTSM-XX-DVU) (SEE NOTE 12)
-A: ALIGNMENT PIN (SEE FIG. 2) (FOR MOLDED TO POSITION, USE RTSM-XX-DVU-XX BODY) (FOR STAKED, USE RTSM-50-DVU BODY, 5 POS MIN) LEAVE BLANK FOR NO HOLD DOWN OPTION (USE RTSM-50-DVU SEE FIG. 1, CAN BE CUT TO POSITION)

TABLE 1

LEAD STYLE	MOUNT STYLE	"B"	"C" MAX (C)	"D"	TERMINAL	OVERALL PIN LENGTH (REF)
-01	-DV	.230	.303	.280	T-156-16-X-2	.445 [11.30] REF
-01	-TM, -TV	.230	-	-	T-156-17-X-2	.480 [12.19] REF
-02	-DV	.320	.293	.370	T-156-08-X-2	.530 [13.46] REF
-03	-DV	.420	.293	.470	T-156-15-X-2	.630 [16.00] REF
-04	-DV	.120	.303	.270	T-156-21-X-2	.335 [8.51] REF
-05	-DV	.075	.323	.270	T-156-18-X-2	.300 [7.62] REF

FIG. 2
-A: ALIGNMENT PIN OPTION
DIFFERENT AS SHOWN. OTHERWISE SAME AS FIG. 1.


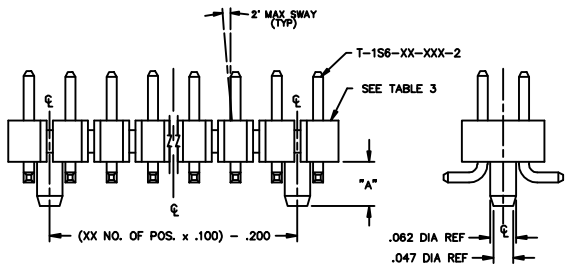


TABLE 3

	"A"	BODY	MIN # OF POS
MOLDED	.100 REF	RTSM-50-DVU-XX	2
* STAKED	.100 ± .005	RTSM-50-DVU	5

* = USE TWO SM-AH'S

FIG. 3
-P OPTION
PLACE PPP-06 ON Q AS SHOWN

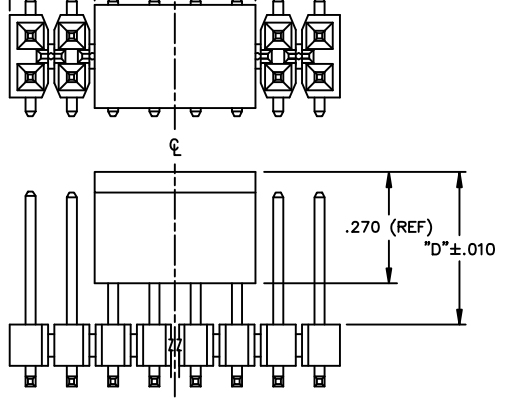


"G" +/- .020 = $\frac{(\text{NO. OF POS. X .100}) - .390}{2}$

FIG. 4
-M OPTION
SCALE .7X
PLACE LMP-01 or MPP-01 ON Q AS SHOWN

TABLE 2

LEAD STYLE	"F"
-01	.368
-04	.278

NOTE:
HAND FILL - USE MPP-01 AND/OR LMP-01
MACHINE FILL - USE LMP-01

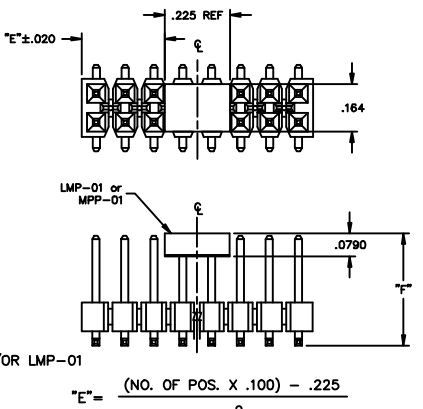

MATERIAL:
INSULATOR:
LIQUID CRYSTAL POLYMER
COLOR: BLACK
TERMINALS:
PHOSPHOR BRONZE

EXISTING ASSEMBLY 100
T360471
samtec
820 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 844-8733 P.O. BOX 1147
CODE 88322
MFG BY BRYANT 4-24-01
TSM-1XX-XX-XXX-XX-X-XXX-X
SHEET 1 OF 2

PROPRIETARY NOTE
THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE. THIS DOCUMENT IS THE PROPERTY OF SAMTEC CORPORATION AND IS LOANED TO YOUR COMPANY. IT IS TO BE USED ONLY FOR THE PURPOSES AUTHORIZED BY SAMTEC CORPORATION. IT IS NOT TO BE REPRODUCED, COPIED, OR DISSEMINATED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF SAMTEC INC.