

Tel: (909)596-6298
 Fax: (888)HO-CHIEN

HO CHIEN ELECTRONIC GROUP, INC.
COMPONENT PROFESSIONALS

2544 Series

0.100" / 2.54mm Ctr Un-shrouded Header Strip; Single Row

 Surface Mount available : [2544-SMT](#)

Material:

Contact: Phosphor Bronze


Contact Plating: Gold or Tin over 0.000100" Nickel Underplating

Insulator:

Version I: PBT & 30% glass fiber reinforced thermo plastic; rated UL94V-0

Version II: PA9T High Temperature HB grade 257C

Insulator Color: Black

Mini Jumper: [2546 Series](#)


Electrical:

Current Rating: 3 Amp Max.

Contact Resistance: 20 Milliohms. Max.

Insulation Resistance: 5000 Megohms Min. DC 500V

Dielectric Strength: 1000V AC


Operation Temperature: -55°C to +140°C

Ordering Part Number


2544 - 1 X - □□ □ □ - □□

Series Number	Number of Rows	Number of Positions	Contact Plating		
2544: Version I 2544H: Version II		[2 thru 40 pins]	T: 150u" Tin G: Gold Flash F: 10u" Gold FT: 10u" Selected Gold E: 15u" Gold ET: 15u" Selected Gold D: 30u" Gold DT: 30u" Selected Gold	Blanket: Straight Lead K: Kinked Lead (Kink on both end only) Min. qty requested.	Specify A, B, C If length is not same to standard. 13.6: A:13.6, B:3.0, C:8.10mm

General 1 row outline.

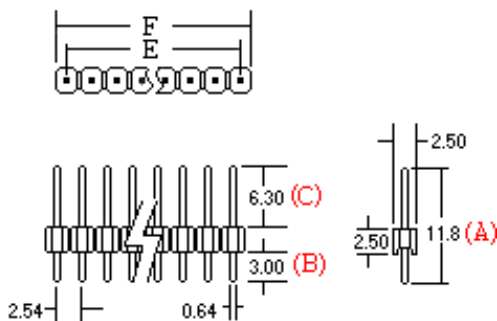

Kink Lead

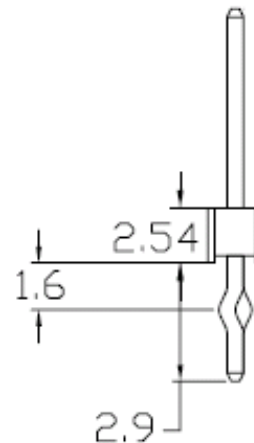

Dimensions (mm) +/- 0.4mm

E	[2.54 x No. of Pos.] - 2.54
F	2.54 x No. of Pos.

| [Main Menu](#) | [Online catalog](#) | [Local Rep](#) | [Distribution](#) |
| [News](#) | [Company](#) | [Request Form](#) | [E-Mail](#) |

Copyright © 1995-2014 Ho Chien Electronic Group, Inc. All rights reserved.