


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process
- High Packing Density.

EQUIVALENT CIRCUIT




BIAS RESISTOR VALUES

TYPE NO.	R1(k)	R2(k)
KRA757E	10	47
KRA758E	22	47
KRA759E	47	22

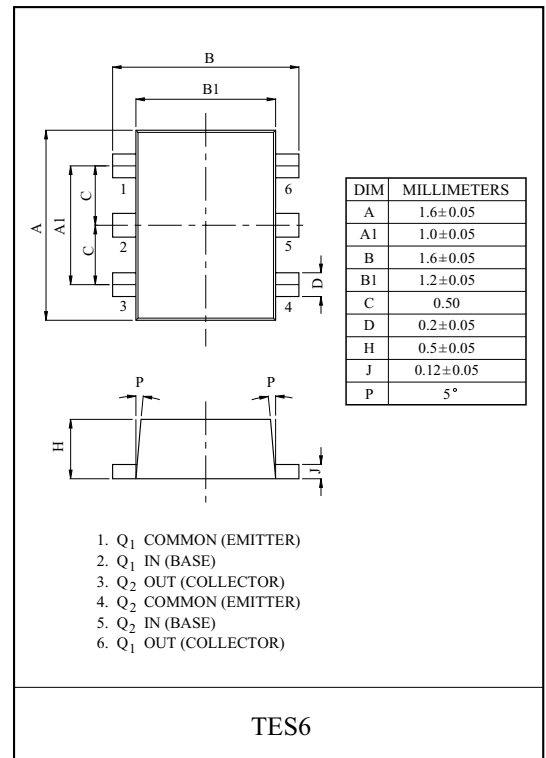

EQUIVALENT CIRCUIT (TOP VIEW)



MAXIMUM RATING (Ta=25)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Output Voltage	V_O	-50	V
Input Voltage	V_I	-30, 6	V
		-40, 7	
		-40, 15	
Output Current	I_O	-100	mA
Power Dissipation	P_D^*	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

* Total Rating.

MARK SPEC

TYPE	KRA757E	KRA758E	KRA759E
MARK	PH	PI	PJ

Marking

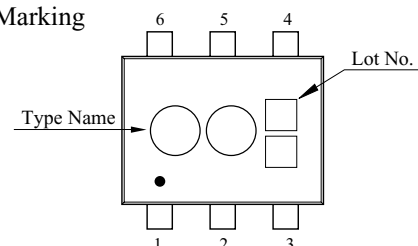







KRA757E~KRA759E

ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Cut-off Current		KRA757E 759E	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC Current Gain	KRA757E		G_I	$V_O=-5V, I_O=-10mA$	80	150	-	
	KRA758E				80	150	-	
	KRA759E				70	140	-	
Output Voltage		KRA757E 759E	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA757E		$V_{I(ON)}$	$V_O=-0.2V, I_O=-5mA$	-	-1.2	-1.8	V
	KRA758E				-	-1.8	-2.6	
	KRA759E				-	-3.0	-5.8	
Input Voltage (OFF)	KRA757E		$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-0.5	-0.75	-	V
	KRA758E				-0.6	-0.88	-	
	KRA759E				-1.5	-1.82	-	
Transition Frequency		KRA757E 759E	f_T^*	$V_O=-10V, I_O=-5mA$	-	200	-	MHz
Input Current	KRA757E		I_I	$V_I=-5V$	-	-	-0.88	mA
	KRA758E				-	-	-0.36	
	KRA759E				-	-	-0.16	
Switching Time	Rise Time	KRA757E	t_r	$V_O=-5V, V_{IN}=-5V$ $R_L=1k$	-	0.07	-	μs
		KRA758E			-	0.20	-	
		KRA759E			-	0.38	-	
	Storage Time	KRA757E	t_{stg}		-	1.1	-	
		KRA758E			-	1.3	-	
		KRA759E			-	0.7	-	
	Fall Time	KRA757E	t_f		-	0.35	-	
		KRA758E			-	0.4	-	
		KRA759E			-	0.48	-	
Input Resistor	KRA757E		R1	-	7	10	13	k
	KRA758E				15.4	22	28.6	
	KRA759E				32.9	47	61.1	
Resistor Ratio	KRA757E		R2/R1	-	3.7	4.7	5.7	
	KRA758E				1.7	2.1	2.6	
	KRA759E				0.37	0.47	0.57	

Note : * Characteristic of Transistor Only.

KRA757E~KRA759E

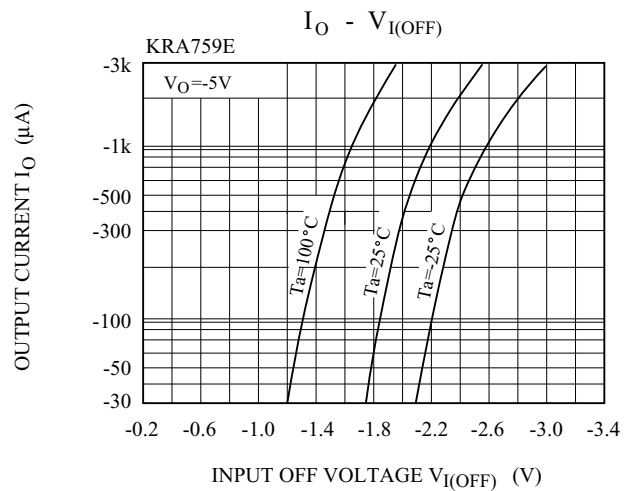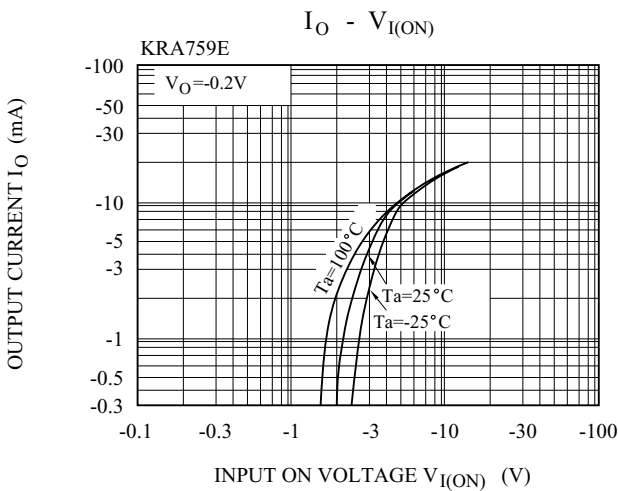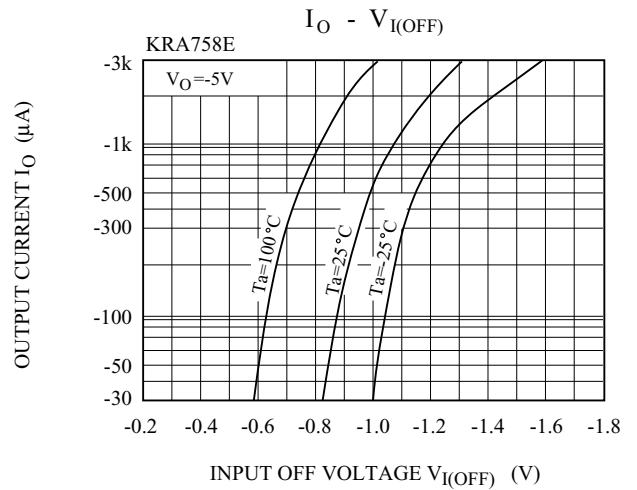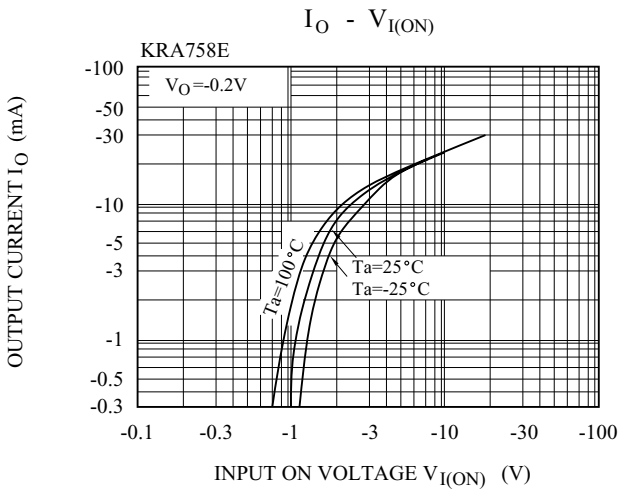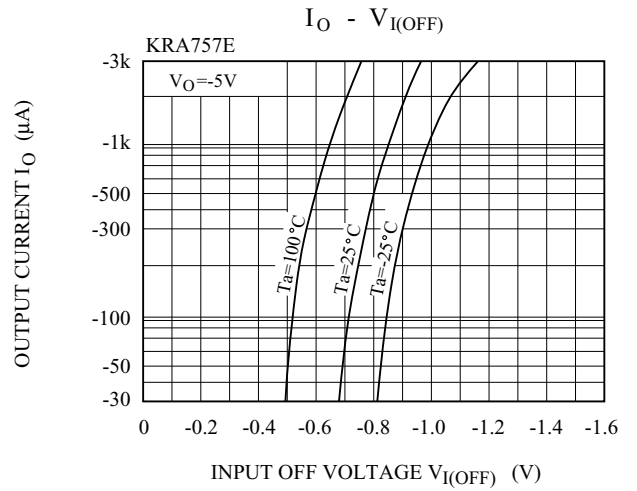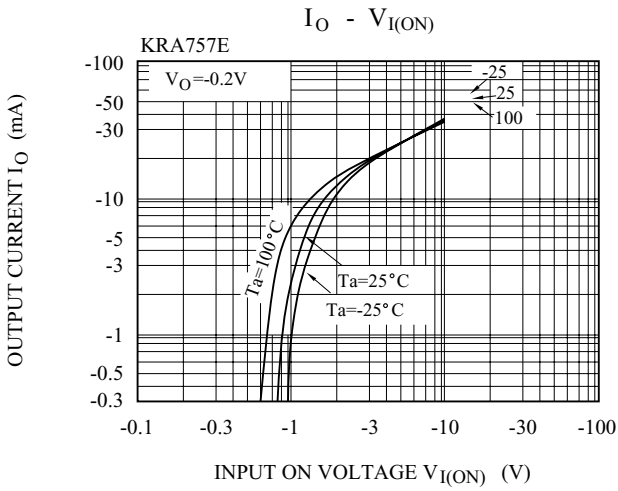

KRA757E~KRA759E

