

Fig. 1

- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available 1,78.
- Series 364 and 464 single and double row PCB interconnects offer 2,16 profile above board.
- Series 335 and 435 use MM #3516 pins. See page 179 for details.
- Series 364 and 464 use MM #6458 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

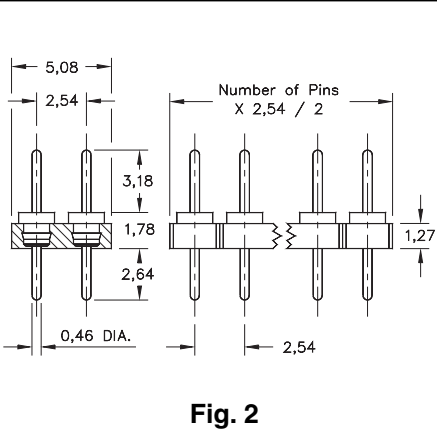
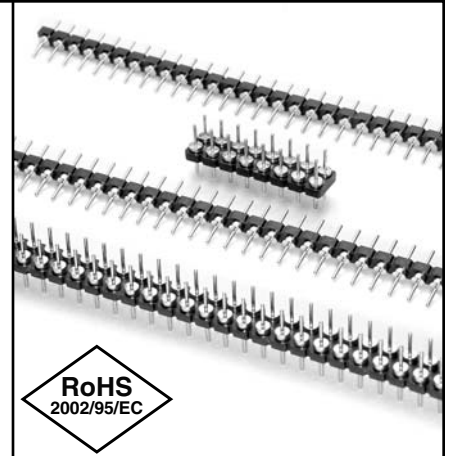


Fig. 2

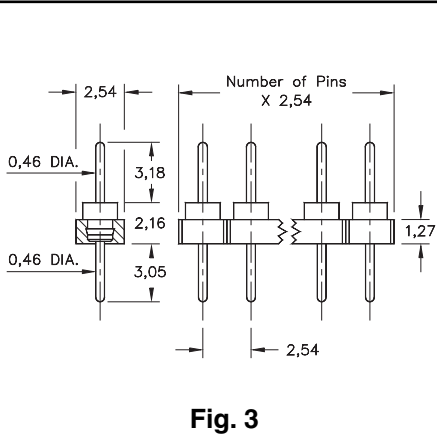


Fig. 3

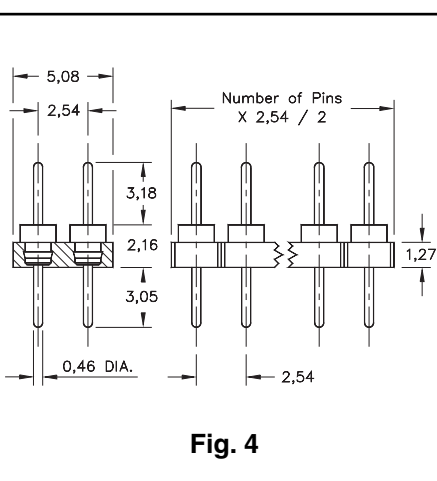


Fig. 4

Ordering Information

Fig. 1	Single Row	1,78 Profile Pin Header
	335-XX-1__-00-160000 Specify # of pins → 01-32	
Fig. 2	Double Row	1,78 Profile Pin Header
	435-XX-2__-00-160000 Specify # of pins → 02-72	
Fig. 3	Single Row	2,16 Profile Pin Header
	364-10-1__-00-580000 Specify # of pins → 01-32	
Fig. 4	Double Row	2,16 Profile Pin Header
	464-10-2__-00-580000 Specify # of pins → 02-72	

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	0,25µ Au	5,08µ Sn/Pb	5,08µ Sn	