



PIN HEADER „PRECISION“
ID: 105 STL 20-XX

Series 430



TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	Brass
Rated Current	3 Amp.
Rated Voltage	100 V _{RMS} /150 V _{DC}
Withstanding Voltage	min. 1000 V _{RMS}
Operating Temperature	-55°C to +125°C
Maximum Soldering Temperature	260°C for 10 seconds

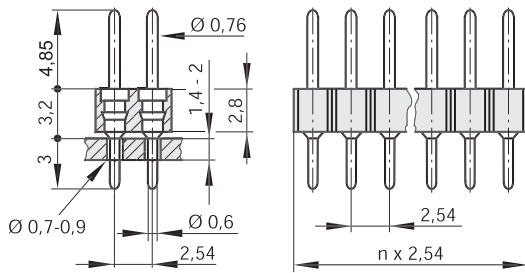

All dimensions in mm.
 Other dimensions upon request.

STL 20 - XX - XXX - XX U

- STL 20: 2 row, straight
- XX: No. of contacts
4 - 72 poles possible
- XXX: Blank = insertion length 5,0mm
680 = insertion length 3,6mm
- XX: ST = Sn
SG = Au
- U: RoHS-compliant with high temp. plastic