







2.5mm Wafer Right Angle / Straight Type

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 500M Ω Min
 Withstanding Voltage: 1000V AC/minute
 Terminal: Brass/Tin-Plated
 Material: Nylon 66, UL94V-0

Part No.	Dimensions	
	A	B
2508R-02TB-L	2.50	7.50
2508R-03TB-L	5.00	10.00
2508R-04TB-L	7.50	12.50
2508R-05TB-L	10.00	15.00
2508R-06TB-L	12.50	17.50
2508R-07TB-L	15.00	20.00
2508R-08TB-L	17.50	22.50
2508R-09TB-L	20.00	25.00
2508R-10TB-L	22.50	27.50
2508R-11TB-L	25.00	30.00
2508R-12TB-L	27.50	32.50
2508R-13TB-L	30.00	35.00
2508R-14TB-L	32.50	37.50
2508R-15TB-L	35.00	40.00


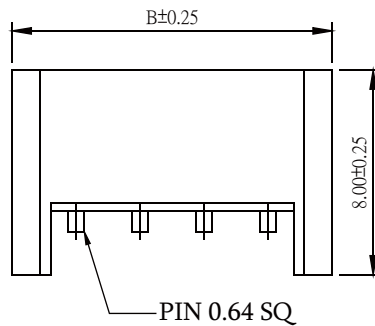

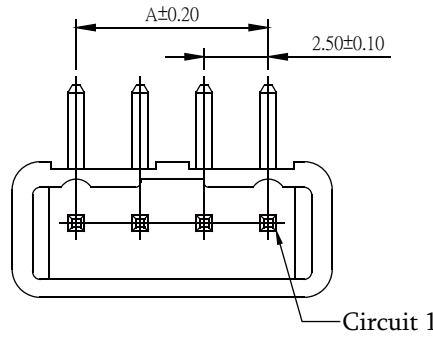


Part No.:2508R-XXTB-L

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 500M Ω Min
 Withstanding Voltage: 1000V AC/minute
 Terminal: Brass/Tin-Plated
 Material: Nylon 66, UL94V-0

Part No.	Dimensions	
	A	B
2508S-02TB-L	2.50	7.50
2508S-03TB-L	5.00	10.00
2508S-04TB-L	7.50	12.50
2508S-05TB-L	10.00	15.00
2508S-06TB-L	12.50	17.50
2508S-07TB-L	15.00	20.00
2508S-08TB-L	17.50	22.50
2508S-09TB-L	20.00	25.00
2508S-10TB-L	22.50	27.50
2508S-11TB-L	25.00	30.00
2508S-12TB-L	27.50	32.50
2508S-13TB-L	30.00	35.00
2508S-14TB-L	32.50	37.50
2508S-15TB-L	35.00	40.00

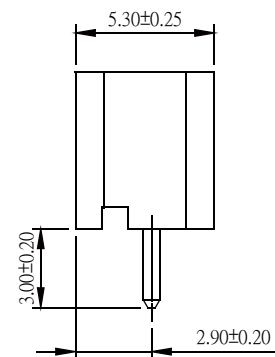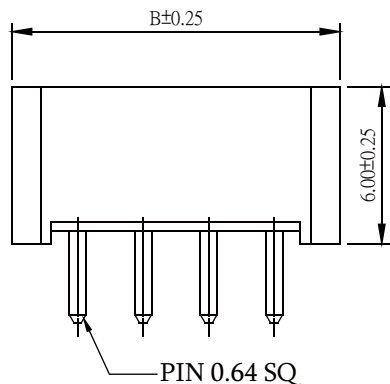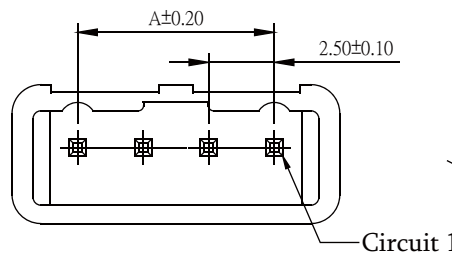

Part No.:2508S-XXTB-L

Housing wafer Terminal



ROHS