



RUE SAINT-HENRI 11, P.O. BOX 834 - CH-2800 DELÉMONT / SWITZERLAND

## Your selected product

### Square Pin Connectors - Straight solder tail

Series 892

**892-PP-NNN-10-001101**

Double row

2.54 mm, Straight solder tail, Square pin diam. 0.635 mm

Square pin headers, solder tail

### Technical specs.:

**Insulator:** Black glass filled polyester PA-GF30-FR

**Flammability:** UL 94V-O


**Contact:** Brass

**Connecting pin:** Square 0.635 mm

**Mechanical life:** Min. 100 cycles

**Rated current:** 3 A

**Dielectric strength:** Min. 1000 V RMS

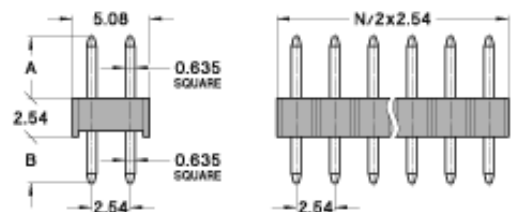

### Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
70	Gold flash	Gold flash
80	Tin	Tin
18	Tin	Gold 0.25 $\mu$ m

**NNN** number of poles. Replace **NNN** with the requested number of poles, e.g. 890-70-**NNN**-10-001101 for a single row version with 8 pins becomes 890-70-**008**-10-001101.

[General technical specs.](#) [View CAD](#)

### 892-PP-NNN-10-001101

Straight square pin header, solder tail, double row.


#### Square pin 0.635 mm

Availability from: 4 to 80 contacts

Standard number of contacts 80.

A = 6 mm

B = 3.1 mm

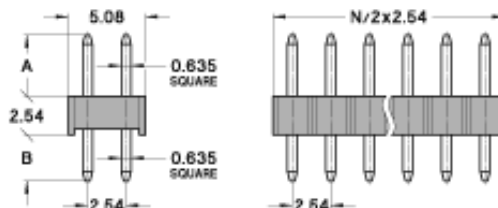

### 892-PP-NNN-10-002101

Straight square pin header, solder tail, double row.


#### Square pin 0.635 mm

Availability from: 4 to 80 contacts

Standard number of contacts 80.

A = 7 mm

B = 3 mm

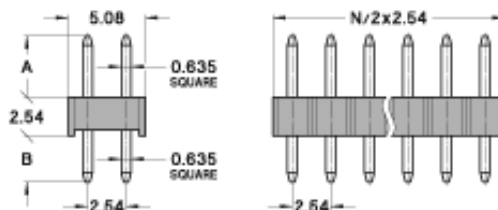


### 892-PP-NNN-10-003101

Straight square pin header, solder tail, double row.

#### Square pin 0.635 mm

Availability from: 4 to 80 contacts

Standard number of contacts 80.

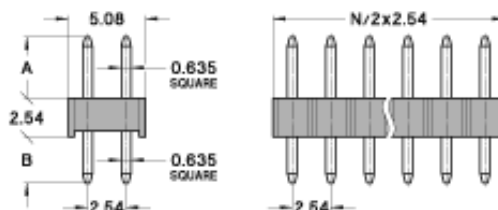

A = 8.5 mm

B = 3 mm

---

### 892-PP-NNN-10-004101

Straight square pin header, solder tail, double row.

**Square pin 0.635 mm**

Availability from: 4 to 80 contacts

Standard number of contacts 80.

A = 14.9 mm

B = 3 mm

