

### ■ FEATURES

- Operating Current from  $20\mu A$  to  $20mA$ .
- Low Temperature Coefficient.
- 1% and 2% Initial Tolerance.
- Low Dynamic Impedance.

### ■ APPLICATIONS

- Portable, Battery-Powered Equipment.
- Instrumentation.
- Process Control.
- Energy Management.
- Product Testing.
- Automotive.
- Precision Audio Components.


### ■ DESCRIPTION

The LM385-2.5 is a micropower 2-terminal bandgap voltage reference, which can operate in a  $20\mu A$  to  $20mA$  current range, they feature exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to achieve tight voltage tolerance. Since the LM385-2.5 bandgap reference uses only transistors and resistors, low noise and good long-term stability result.

Careful design of the LM385-2.5 has made the device exceptionally tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows for its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM385-2.5 makes it useful for micropower circuitry. This voltage reference can be used to make portable meters, regulators, or general-purpose analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance.


### ■ TYPICAL APPLICATION CIRCUIT



Precision 2.500V Voltage Reference

## ■ ORDERING INFORMATION

LM385X-2.5XXXX

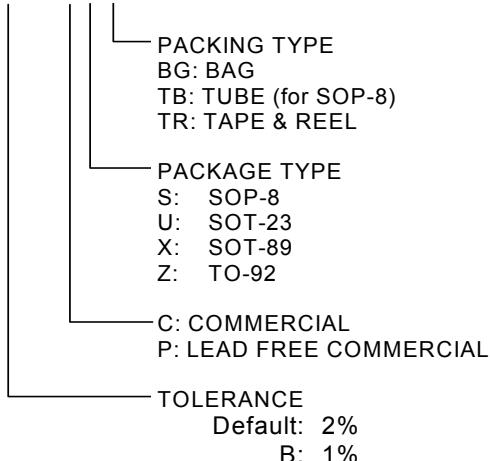


Example: LM385-2.5CSTR

→ 2% version, in SOP-8 Package & Taping &  
Reel Packing Type  
(CS is not available in BAG packing type.)

LM385-2.5PSTR

→ 2% version, in Lead Free SOP-8 Package &  
Taping & Reel Packing Type

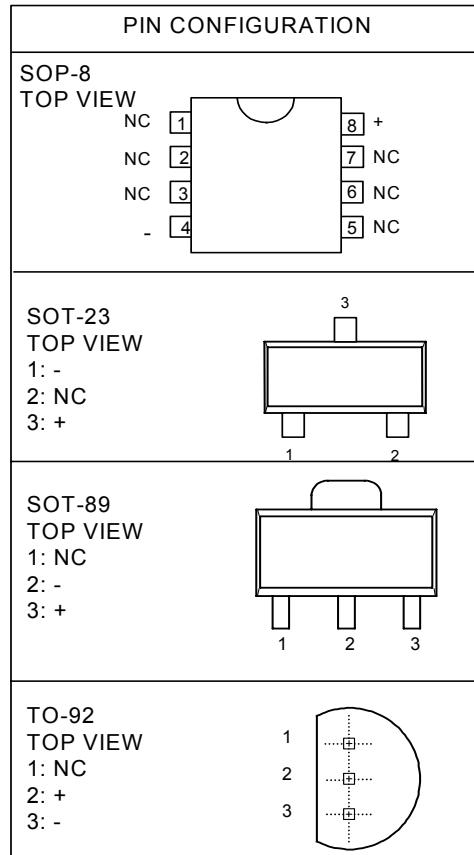

### ● SOT-23 Marking

Part No.	Marking	Part No.	Marking
LM385-25CU	AIA2	LM385-25PU	AIA2P
LM385B-25CU	AIB2	LM385B-25PU	AIB2P

### ● SOT-89 Marking

Part No.	Marking	Part No.	Marking
LM385-25CX	AI25	LM385-25PX	AI25P
LM385B-25CX	AIB25	LM385B-25PX	AI2BP

## ■ ABSOLUTE MAXIMUM RATINGS

Reverse Current .....	30mA
Forward Current .....	10mA
Operating Temperature Range .....	-40°C to 85°C
Junction Temperature .....	125°C
Storage Temperature Range .....	-65°C to 150°C
Lead Temperature (soldering, 10s) .....	260°C

**Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.**

## ■ TEST CIRCUIT

Refer to TYPICAL APPLICATION CIRCUIT.

## ■ ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , unless otherwise specified.) (Note1)

PARAMETER	TEST CONDITIONS		SYMBOL	MIN.	TYP.	MAX.	UNIT
Reverse Breakdown Voltage	$I_R=100\mu\text{A}$	LM385B-2.5 LM385-2.5	$V_R$	2.475 2.450	2.500	2.525 2.550	V
Reverse Breakdown Voltage Change with Current	$20\mu\text{A} \leq I_R \leq 1\text{mA}$			$\Delta V_R$		2	mV
	$1\text{mA} \leq I_R \leq 20\text{mA}$			$\Delta V_R$		20	mV
Reverse Dynamic Impedance	$I_R=100\mu\text{A}, f=20\text{Hz}$		$Z_R$	1			$\Omega$
Minimum Operating Current				$I_{R\text{MIN}}$	13	20	$\mu\text{A}$
Wideband Noise (rms)	$I_R=100\mu\text{A}, 10\text{Hz} \leq f \leq 10\text{KHz}$			$e_N$	120		$\mu\text{Vrms}$
Average Temperature Coefficient (Note 2)	$I_R=100\mu\text{A}$			$\alpha V_R$	100		$\text{ppm}/^\circ\text{C}$
Long Term Stability	$I_R=100\mu\text{A}, T=1000\text{Hrs}, T_A=25^\circ\text{C}$			$\Delta V_R / \Delta t$	20		ppm

Note 1: Specifications are production tested at  $T_A=25^\circ\text{C}$ . Specifications over the  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  operating temperature range are assured by design, characterization and correlation with Statistical Quality Controls (SQC).

Note 2: The average temperature coefficient is defined as the maximum deviation of reverse breakdown voltage at all measured temperatures from  $T_{\text{MIN}}$  to  $T_{\text{MAX}}$ , divided by  $T_{\text{MAX}} - T_{\text{MIN}}$ . The measured temperatures are  $0^\circ\text{C}$ ,  $25^\circ\text{C}$ ,  $50^\circ\text{C}$  and  $70^\circ\text{C}$ .

## ■ TYPICAL PERFORMANCE CHARACTERISTICS

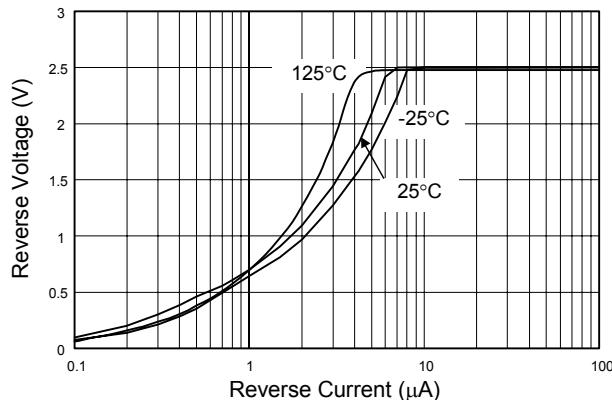


Fig. 1 Reverse Characteristics

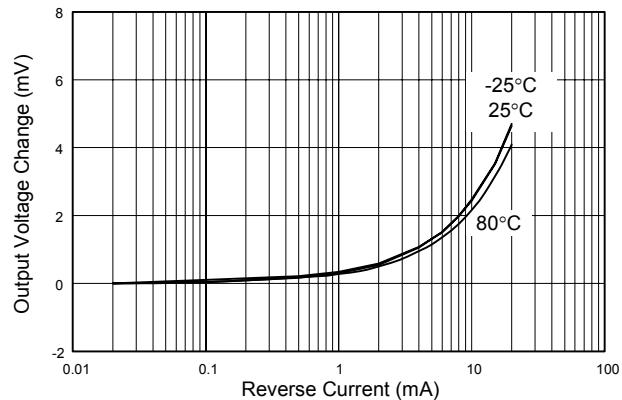


Fig. 2 Reverse Characteristics

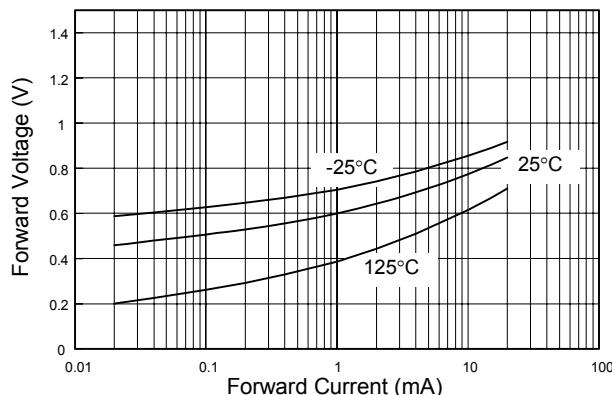


Fig. 3 Forward Characteristics

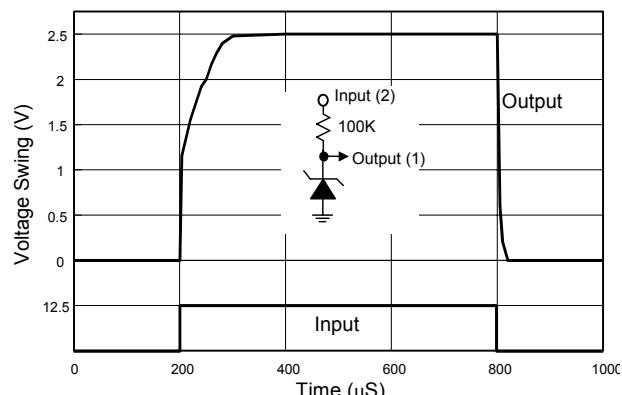


Fig. 4 Response Time

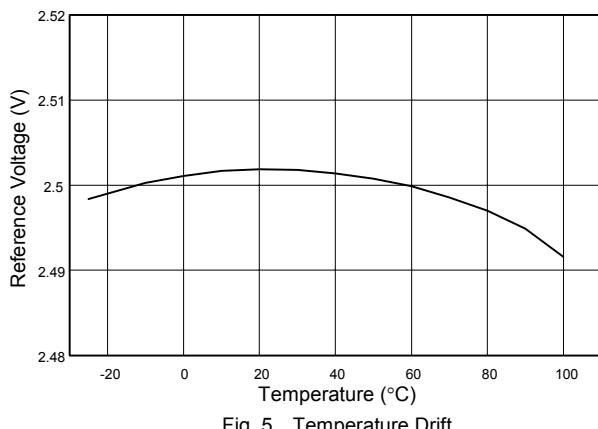


Fig. 5 Temperature Drift


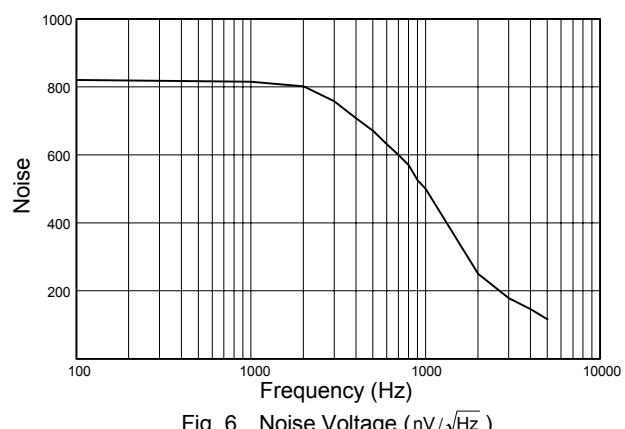


Fig. 6 Noise Voltage (nV/ $\sqrt{\text{Hz}}$ )

## ■ BLOCK DIAGRAM




## ● SYMBOL

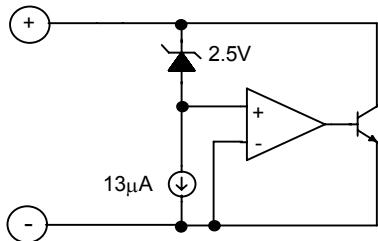


## ■ PIN DESCRIPTIONS

- PIN + - sinks current with a range from 20µA to 20mA for normal applications. And a stable positive voltage, relative to Pin-, occurs on Pin+.
- PIN - - Pin- sources current for normal application. The current value is the same as Pin+.
- PIN NC - Not connected.

## ■ APPLICATION EXAMPLES

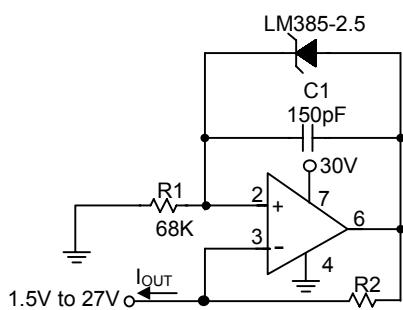

$$I_{OUT} = \frac{2.5V}{R_2}$$

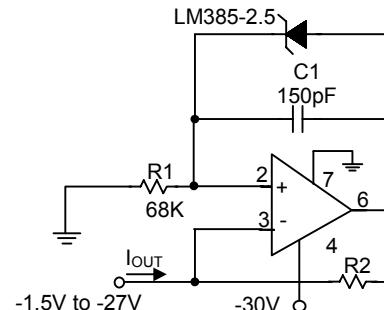


$$I_{OUT} = \frac{2.5V}{R_2}$$

**Fig. 7 Precision 1µA to 1mA Current Source**


## ■ PHYSICAL DIMENSIONS (unit: mm)

### ● SOP-8

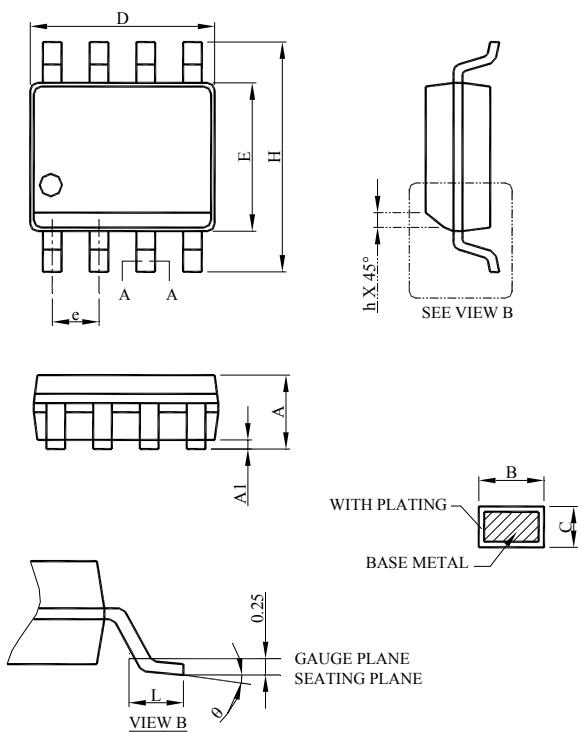


SYMBOL	SOP-8	
	MILLIMETERS	
	MIN.	MAX.
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.27
θ	0°	
	8°	

### ● SOT-23

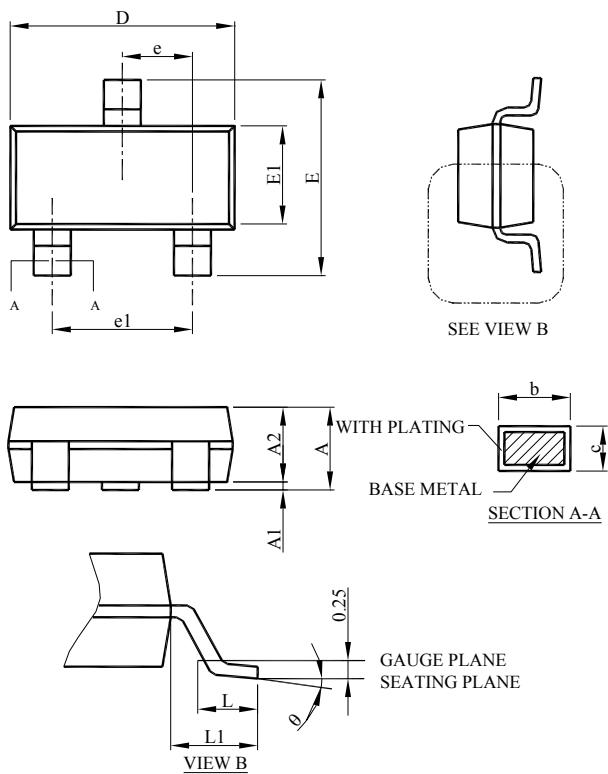


SYMBOL	SOT-23	
	MILLIMETERS	
	MIN.	MAX.
A	0.95	1.45
A1	0.05	0.15
A2	0.90	1.30
b	0.30	0.50
c	0.08	0.22
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.70
e	0.95 BSC	
e1	1.90 BSC	
L	0.30	0.60
L1	0.60 REF	
θ	0°	
	8°	

## ● SOT-89

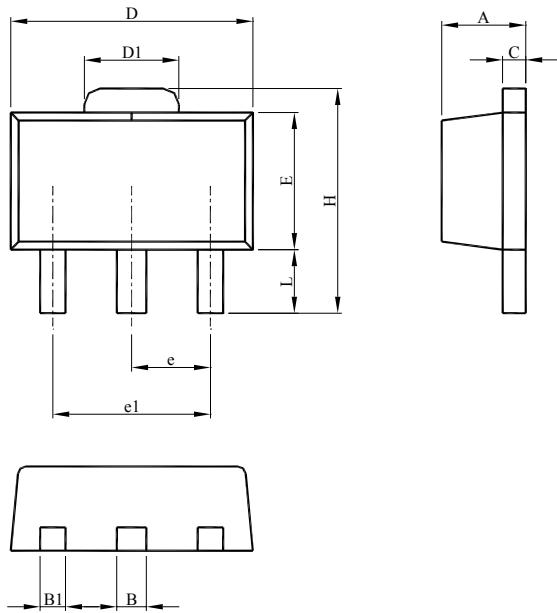

SYMBOL	SOT-89	
	MILLIMETERS	
	MIN.	MAX.
A	1.40	1.60
B	0.44	0.56
B1	0.36	0.48
C	0.35	0.44
D	4.40	4.60
D1	1.50	1.83
E	2.29	2.60
e	1.50 BSC	
e1	3.00 BSC	
H	3.94	4.25
L	0.89	1.20

## ● TO-92

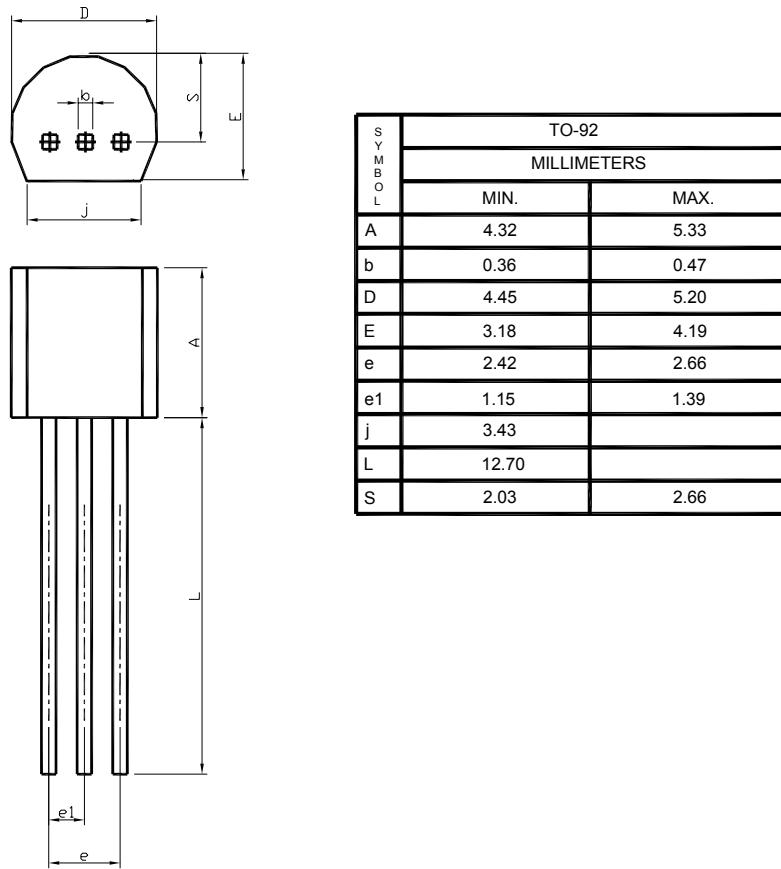

SYMBOL	TO-92	
	MILLIMETERS	
	MIN.	MAX.
A	4.32	5.33
b	0.36	0.47
D	4.45	5.20
E	3.18	4.19
e	2.42	2.66
e1	1.15	1.39
j	3.43	
L	12.70	
S	2.03	2.66



**LM385-2.5/LM385B-2.5**

**Note:**

Information provided by AIC is believed to be accurate and reliable. However, we cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AIC product; nor for any infringement of patents or other rights of third parties that may result from its use. We reserve the right to change the circuitry and specifications without notice.

Life Support Policy: AIC does not authorize any AIC product for use in life support devices and/or systems. Life support devices or systems are devices or systems which, (I) are intended for surgical implant into the body or (ii) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.