

TECHNICAL DATA
DATA SHEET 5283, REV. C.1

HERMETIC ULTRAFAST RECOVERY RECTIFIER HIGH VOLTAGE

Features:

- Low Forward Voltage Drop
- Ultrafast Reverse Recovery
- Low Power Loss, High Efficiency
- Very High Surge Capacity
- For ceramic seals use part number prefix SHDC
- Different Lead-bend options available
- JANTX (suffix S) and JANS (suffix SS) equivalent screening options
- Add suffix R for Reverse Polarity (SHD365423R / SHD365423BR)

Maximum Ratings:



Characteristics	Symbol	Condition	Max.	Units
Peak Inverse Voltage	V_{RWM}	$I_R = 100\mu A, T_C = 25^\circ C$	600	V
Max. Average Forward Current	$I_{F(AV)}$	50% duty cycle, rectangular wave form, $T_C = 85^\circ C$	25	A
Max. Peak One Cycle Non-Repetitive Surge Current	I_{FSM}	8.3 msec, sine pulse	150	A
Thermal Resistance	R_{TH}	Standard Version Reverse Polarity Version	1.3 1.5	$^\circ C / W$
Max. Junction Temperature	T_J	-	- 55 to + 150	$^\circ C$
Max. Storage Temperature	T_{stg}	-	- 55 to + 150	$^\circ C$

Electrical Characteristics:

Characteristics	Symbol	Condition	Typ.	Max.	Units
Max. Forward Voltage Drop	V_{F1}	@ 5A, Pulse, $T_J = 25^\circ C$	1.10	1.25	V
		@ 10A, Pulse, $T_J = 25^\circ C$	1.16	1.30	
		@ 20A, Pulse, $T_J = 25^\circ C$	1.22	1.37	
	V_{F2}	@ 5A, Pulse, $T_J = 125^\circ C$	0.84	1.00	V
		@ 10A, Pulse, $T_J = 125^\circ C$	0.94	1.10	
		@ 20A, Pulse, $T_J = 125^\circ C$	1.07	1.23	
	V_{F3}	@ 5A, Pulse, $T_J = -55^\circ C$	1.18	1.35	V
		@ 10A, Pulse, $T_J = -55^\circ C$	1.23	1.40	
		@ 20A, Pulse, $T_J = -55^\circ C$	1.30	1.48	
Max. Reverse Current	I_{R1}	@ $V_R = 600V$, Pulse, $T_J = 25^\circ C$	10	50	μA
	I_{R2}	@ $V_R = 480V$, Pulse, $T_J = 125^\circ C$	4	15	mA
Reverse Recovery Time	T_{RR}	$I_F = 0.5A; I_{RM} = 1A, I_{RR} = 0.25A$ $T_J = 25^\circ C$	25	35	ns
Capacitance	C_J	$V_R = 10V, f = 1MHz$	60	80	pF

TECHNICAL DATA
DATA SHEET 5283, REV. C.1

MECHANICAL DIMENSIONS: In Inches / mm

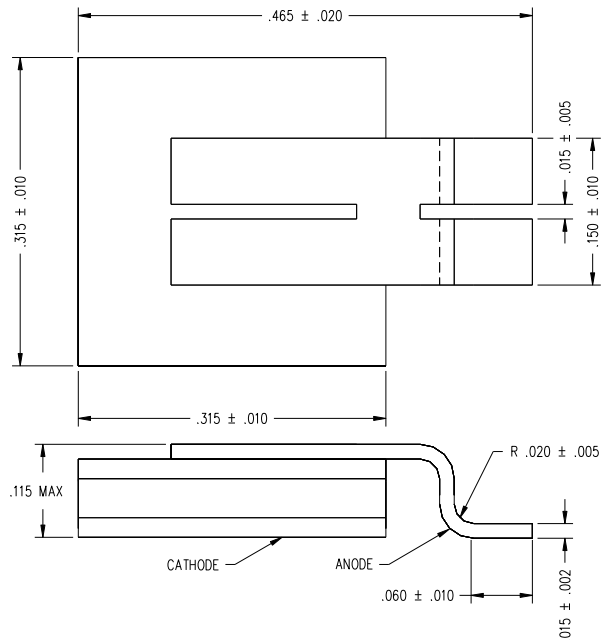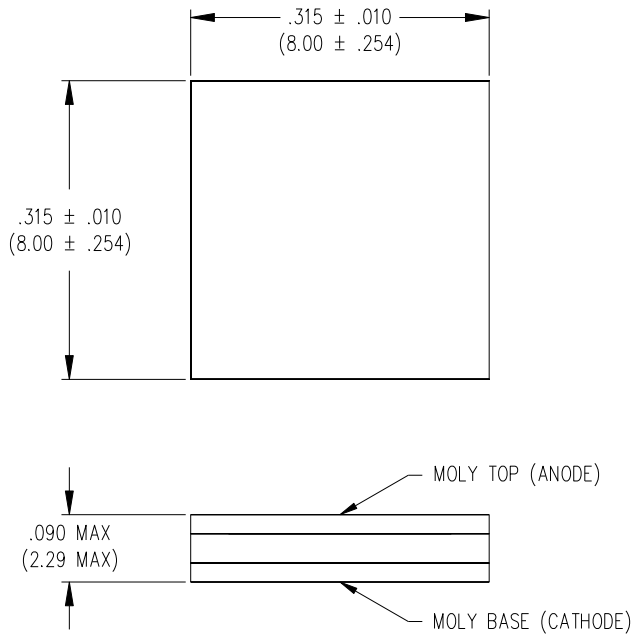

SHD-2 High Profile

SHD-2B High Profile

PINOUT TABLE

TYPE	PIN 1 (Base)	PIN 2
SINGLE RECTIFIER (Standard Version, SHD365423) in a Surface Mount Package	CATHODE	ANODE
SINGLE RECTIFIER (Reverse Polarity Version, SHD365423R) in a Surface Mount Package	CATHODE	ANODE

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.