


## Surface Mount Schottky Barrier Rectifiers

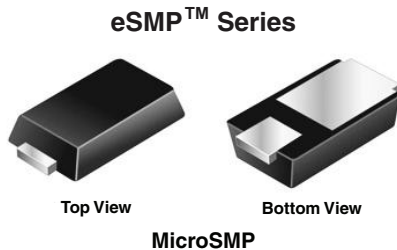

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	1 A
$V_{RRM}$	20 V, 30 V
$I_{FSM}$	25 A
$V_F$ at $I_F = 1.0$ A	0.35 V
$T_J$ max.	150 °C

### TYPICAL APPLICATIONS

For use in low voltage high frequency inverters, freewheeling, dc-to-dc converters, and polarity protection applications.

### FEATURES

- Very low profile - typical height of 0.68 mm
- Ideal for automated placement
- Low forward voltage drop, low power losses
- High efficiency
- “Green” molding compound (GMC)
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### MECHANICAL DATA

Case: MicroSMP

Molding compound meets UL 94V-0 flammability rating.

“G” vs. “E” suffix defines molding as none green, “E”, or green molding compound (GMC) “G”.

“G” is defined as halogen-free (HF) and antimony-free molding compound.

**Note:**

- There is no industry standard for definition of HF, or GMC for components.

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 and G3 suffix for consumer grade, meets JESD 201 class 1A whisker test. “E3/G3” terminal finish per J-STD-609

**Polarity:** Color band denotes the cathode end

MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)				
PARAMETER	SYMBOL	MSS1P2L	MSS1P3L	UNIT
Device marking code		12L	13L	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	V
Maximum average forward rectified current (Fig. 1)	$I_{F(AV)}$	1.0		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	25		A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150		°C



ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)						
PARAMETER	TEST CONDITIONS		SYMBOL	TYP.	MAX.	UNIT
Maximum instantaneous forward voltage <sup>(1)</sup>	I <sub>F</sub> = 0.5 A	T <sub>J</sub> = 25 °C	V <sub>F</sub>	0.39	-	V
	I <sub>F</sub> = 1.0 A			0.44	0.50	
	I <sub>F</sub> = 0.5 A	T <sub>J</sub> = 125 °C		0.28	-	
	I <sub>F</sub> = 1.0 A			0.35	0.40	
Maximum reverse current <sup>(2)</sup>	rated V <sub>R</sub>	T <sub>J</sub> = 25 °C T <sub>J</sub> = 125 °C	I <sub>R</sub>	15 6.0	250 20	μA mA
Typical junction capacitance	4.0 V, 1 MHz		C <sub>J</sub>	65	-	pF

**Notes:**

- (1) Pulse test: 300 μs pulse width, 1 % duty cycle
- (2) Pulse test: Pulse width ≤ 40 ms

THERMAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)				
PARAMETER	SYMBOL	MSS1P2L	MSS1P3L	UNIT
Typical thermal resistance <sup>(1)</sup>	R <sub>θJA</sub>	125		°C/W
	R <sub>θJL</sub>	30		
	R <sub>θJC</sub>	40		

**Note:**

- (1) Thermal resistance from junction to ambient and junction to lead mounted on P.C.B. with 6.0 x 6.0 mm copper pad areas. R<sub>θJL</sub> is measured at the terminal of cathode band. R<sub>θJC</sub> is measured at the top center of the body

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
MSS1P3L-E3/89A	0.006	89A	4500	7" diameter plastic tape and reel
MSS1P3L-G3/89A	0.006	89A	4500	7" diameter plastic tape and reel

**RATINGS AND CHARACTERISTICS CURVES**

(T<sub>A</sub> = 25 °C unless otherwise noted)

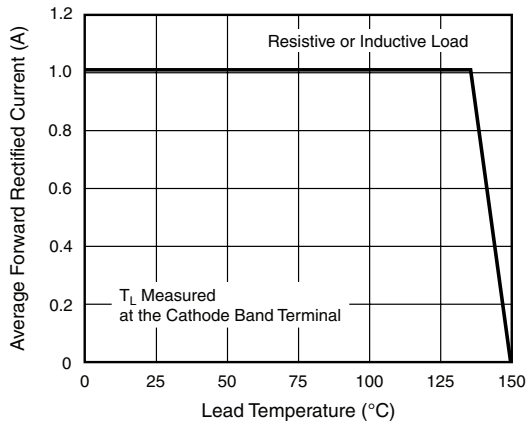


Figure 1. Maximum Forward Current Derating Curve

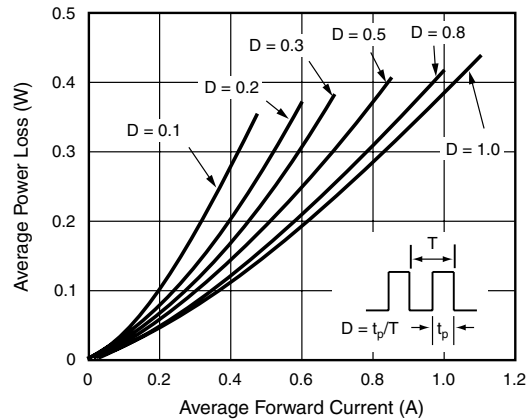


Figure 2. Forward Power Loss Characteristics

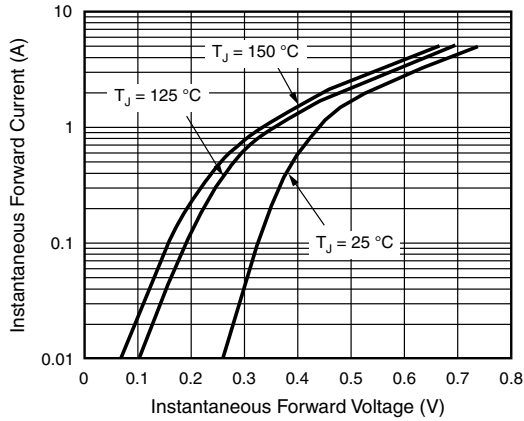


Figure 3. Typical Instantaneous Forward Characteristics

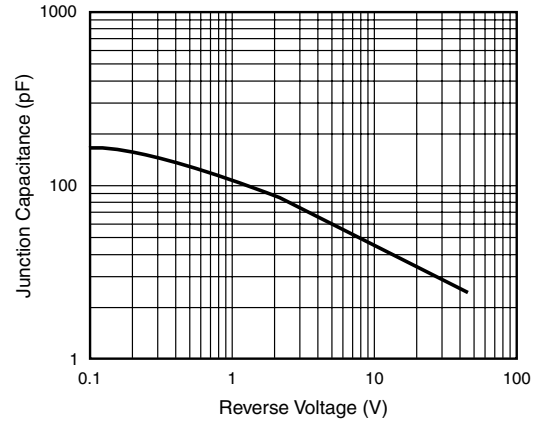


Figure 5. Typical Junction Capacitance

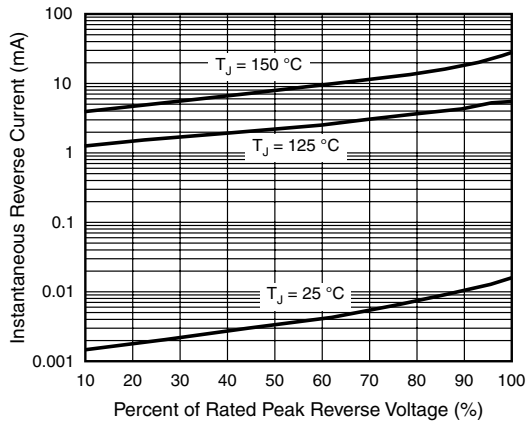


Figure 4. Typical Reverse Characteristics


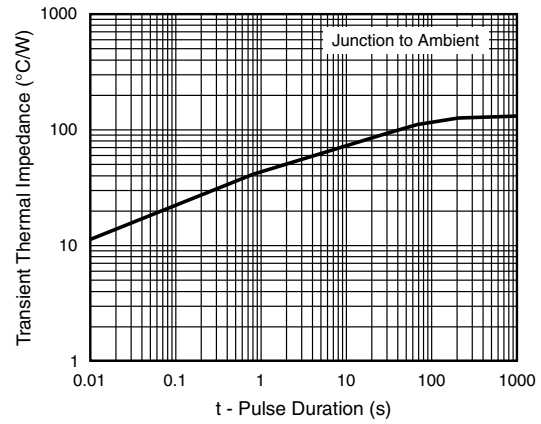


Figure 6. Typical Transient Thermal Impedance

**PACKAGE OUTLINE DIMENSIONS** in inches (millimeters)

**MicroSMP**



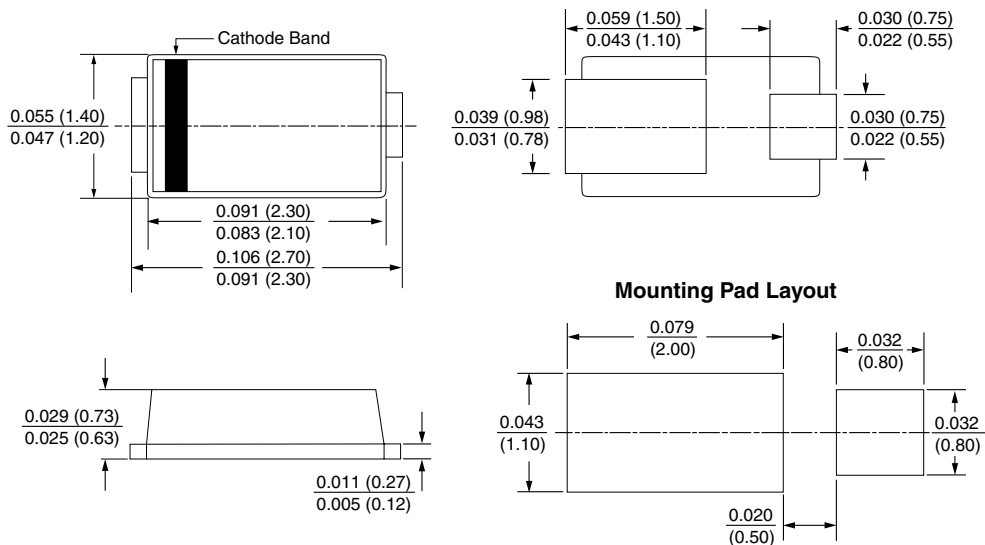

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.