

Handwritten notes:
 7/11/11
 KZ
 11-30-11

Kingbright Electronic Co., Ltd.




Mail Address : P. O. Box 81-153 Taipei, Taiwan
 Telex No. : 22249 TWNKIN

Cable Address: "TWNKIN" Taipei
 Telephones : 715-2848 • 713-0682

LED LOGIC STATUS INDICATORS

L-72CB

Unit: mm
 Tolerance: ±0.2

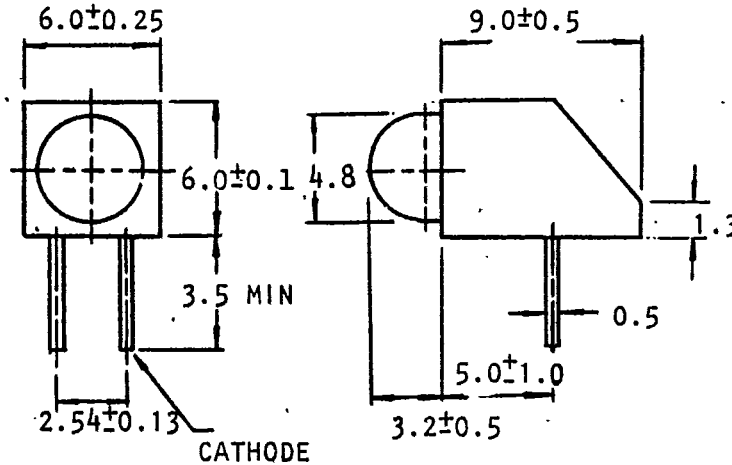

Handwritten: ✓ - New

PART NO.	SOURCE (DICE)	LENSE TYPE (RESIN)	AXIAL LUMINOUS INTENSITY IN MCD @ 20mA		VIEWING ANGLE
			MIN	TYP	
✓ L-72CB/1IDA	RED (GaAsP/GaP)	Red Diffused	2.0	5	160°
✓ L-72CB/1RDA	RED (GaAsP)	Red Diffused	0.5	2	160°
✓ L-72CB/1HDA	RED (GaP)	Red Diffused	0.5	2.2	160°
✓ L-72CB/1GDA	GREEN (GaP)	Green Diffused	1.0	3.5	160°
✓ L-72CB/1YDA	YELLOW (GaAsP/GaP)	Yellow Diffused	2.0	5	160°
✓ L-72CB/1EDA	ORANGE (GaAsP/GaP)	Orange Diffused	2.0	5	160°