








## 2.0mm WAFER RIGHT ANGLE / STRAIGHT TYPE

### SPECIFICATIONS

Current Rating: 2A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 30mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute  
Pin Material: Brass/Tin-plated  
Material: Nylon 46,UL94V-0  
Color: Natural(Beige)

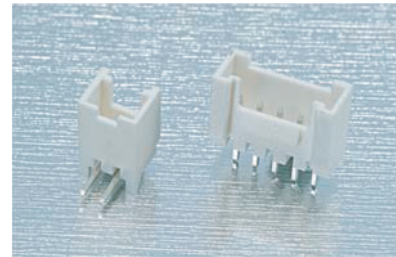

PART NO.	Dimensions	
	A	B
2008R-02TW-U	2.00	6.00
2008R-03TW-U	4.00	8.00
2008R-04TW-U	6.00	10.00
2008R-05TW-U	8.00	12.00
2008R-06TW-U	10.00	14.00
2008R-07TW-U	12.00	16.00
2008R-08TW-U	14.00	18.00
2008R-09TW-U	16.00	20.00
2008R-10TW-U	18.00	22.00
2008R-11TW-U	20.00	24.00
2008R-12TW-U	22.00	26.00
2008R-13TW-U	24.00	28.00
2008R-14TW-U	26.00	30.00
2008R-15TW-U	28.00	32.00
2008R-16TW-U	30.00	34.00

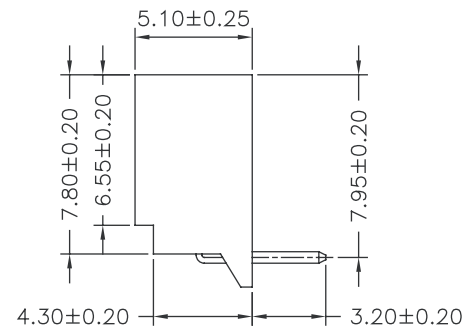


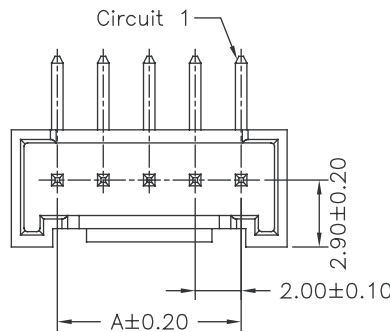


### Part No.:2008R-XXTW-U

### SPECIFICATIONS

Current Rating: 2A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 30mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute  
Pin Material: Brass/Tin-plated  
Material: Nylon 46,UL94V-0  
Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
2008S-02TW-U	2.00	6.00
2008S-03TW-U	4.00	8.00
2008S-04TW-U	6.00	10.00
2008S-05TW-U	8.00	12.00
2008S-06TW-U	10.00	14.00
2008S-07TW-U	12.00	16.00
2008S-08TW-U	14.00	18.00
2008S-09TW-U	16.00	20.00
2008S-10TW-U	18.00	22.00
2008S-11TW-U	20.00	24.00
2008S-12TW-U	22.00	26.00
2008S-13TW-U	24.00	28.00
2008S-14TW-U	26.00	30.00
2008S-15TW-U	28.00	32.00
2008S-16TW-U	30.00	34.00

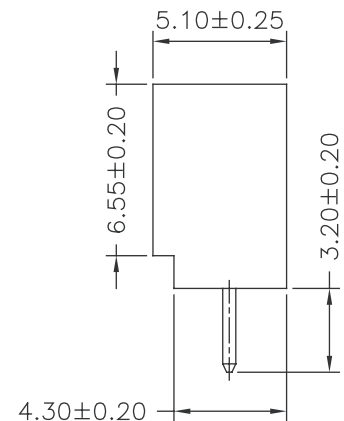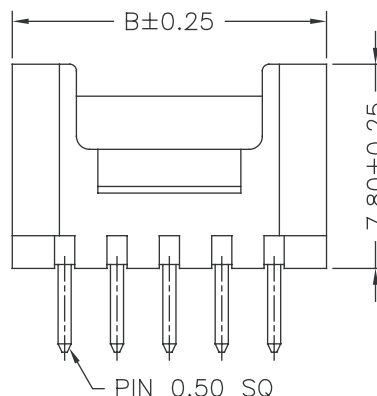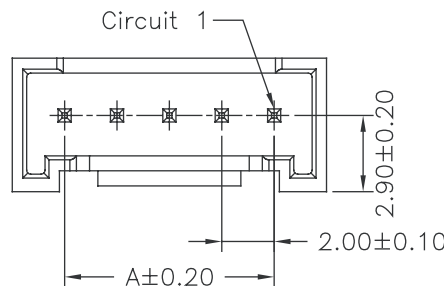

### Part No.:2008S-XXTW-U