


# FLS CONNECTOR

Connectors for FPC



**Compact connector with just 2.0mm (.079") high after mounting on the PC board.**

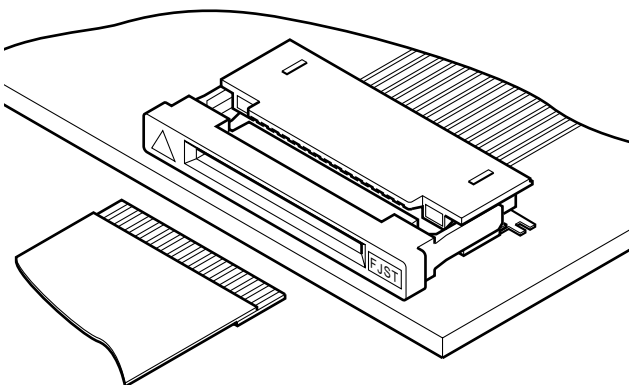

## Features

### • Easy location of FPC

The shrouded FPC entry point allows the FPC to be positioned and held in place before the connector is locked.

### • Heat resistant design suitable for surface mounting

The housing is made of heat resistant plastic to allow reflow soldering.

### • In-line surface mounting

Has an in-line surface mount tails for easy inspection.

### • Two types of connections

The connector is available in either the normal or reverse configurations. The FPC is positioned with its mating surfaces facing upward for the normal configured connector, while the reverse configuration requires that the FPC be positioned with its mating surfaces facing down. The engineer has greater freedom in designing his circuitry.

### • Embossed tape for automatic mounting

The FLS connector can be packaged in embossed tape for automatic mounting.

## Specifications

- Current rating: 0.5A AC, DC
- Voltage rating: 50V AC, DC
- Temperature range: -25°C to +85°C  
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/40m Ω max.  
After environmental testing/60m Ω max.
- Insulation resistance: 800M Ω min.
- Withstanding voltage: 200V AC/minute
- Applicable FPC: Lead pitch/0.5mm(.020")  
Lead width/0.35mm(.014")  
Mating part thickness/  
0.3±0.03mm (.012"±.001")

<Note>FPC to be actually used should be checked for applicability.

- \* Contact JST if Lead-Free product is required.
- \* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
- \* Contact JST for details.


## Standards

Recognized E60389

Certified LR20812

# FLS CONNECTOR

## Connector

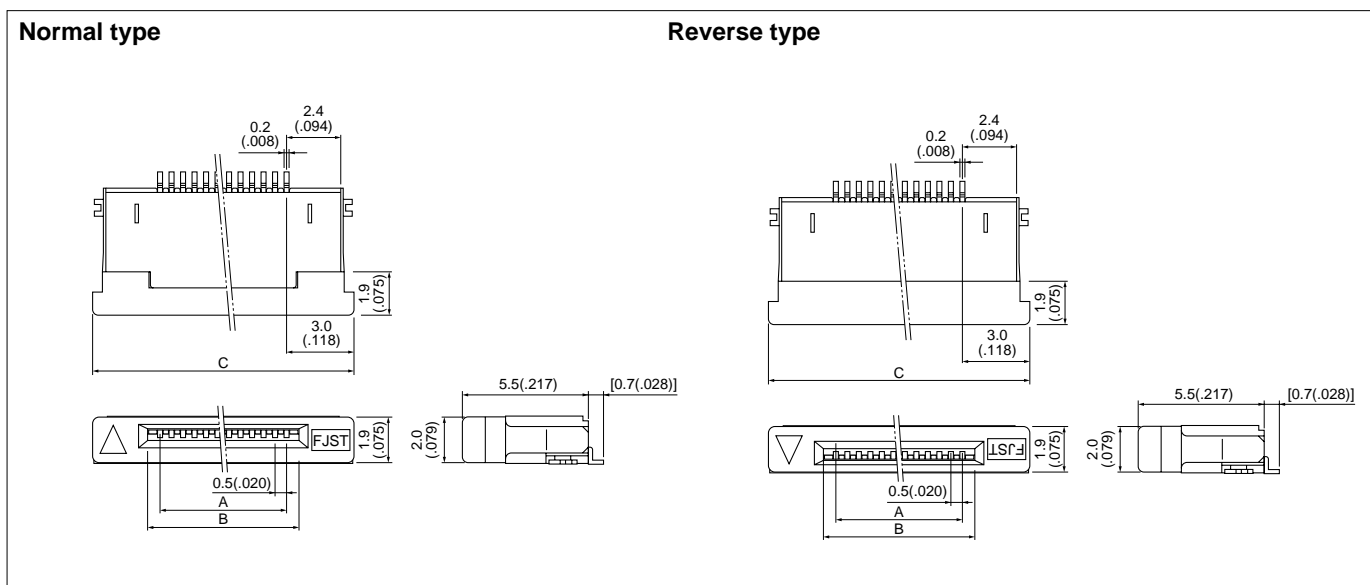


Circuits	Model No.		Dimensions mm (in.)			Q'ty / reel
	Normal type	Reverse type	A	B	C	
6	06FLS-SM1-TB	06FLS-RSM1-TB	2.5(.098)	3.55(.140)	8.5(.335)	2,000
7	07FLS-SM1-TB	07FLS-RSM1-TB	3.0(.118)	4.05(.159)	9.0(.354)	2,000
9	09FLS-SM1-TB	09FLS-RSM1-TB	4.0(.157)	5.05(.199)	10.0(.394)	2,000
10	10FLS-SM1-TB	10FLS-RSM1-TB	4.5(.177)	5.55(.219)	10.5(.413)	2,000
12	12FLS-SM1-TB	12FLS-RSM1-TB	5.5(.217)	6.55(.258)	11.5(.453)	2,000
13	13FLS-SM1-TB	—	6.0(.236)	7.05(.278)	12.0(.472)	2,000
15	15FLS-SM1-TB	15FLS-RSM1-TB	7.0(.276)	8.05(.317)	13.0(.512)	2,000
16	16FLS-SM1-TB	16FLS-RSM1-TB	7.5(.295)	8.55(.337)	13.5(.531)	2,000
17	17FLS-SM1-TB	17FLS-RSM1-TB	8.0(.315)	9.05(.356)	14.0(.551)	2,000
18	18FLS-SM1-TB	18FLS-RSM1-TB	8.5(.335)	9.55(.376)	14.5(.571)	2,000
19	19FLS-SM1-TB	19FLS-RSM1-TB	9.0(.354)	10.05(.396)	15.0(.591)	2,000
20	20FLS-SM1-TB	20FLS-RSM1-TB	9.5(.374)	10.55(.415)	15.5(.610)	2,000
22	22FLS-SM1-TB	22FLS-RSM1-TB	10.5(.413)	11.55(.455)	16.5(.650)	2,000
24	24FLS-SM1-TB	24FLS-RSM1-TB	11.5(.453)	12.55(.494)	17.5(.689)	2,000
26	26FLS-SM1-TB	26FLS-RSM1-TB	12.5(.492)	13.55(.533)	18.5(.728)	2,000
28	28FLS-SM1-TB	28FLS-RSM1-TB	13.5(.531)	14.55(.573)	19.5(.768)	2,000
30	30FLS-SM1-TB	30FLS-RSM1-TB	14.5(.571)	15.55(.612)	20.5(.807)	2,000

### Material and Finish


Contact: Phosphor bronze, copper-undercoated, tin/lead-plated  
 Slider housing: Nylon 46,UL94V-0      Receptacle housing: Nylon 46,UL94V-0  
 ( )FLS-SM1-TB...natural      ( )FLS-SM1-TB...gray  
 ( )FLS-RSM1-TB...black      ( )FLS-RSM1-TB...natural  
 Solder tab: Phosphor bronze, copper-undercoated, tin/lead-plated

Note: The products listed above are supplied on embossed-tape.



## Taping specifications

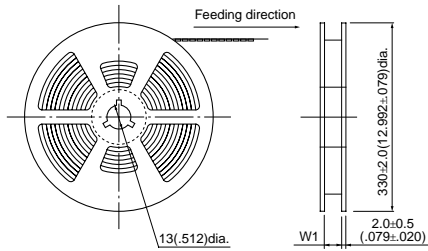

(6 to 22 circuits)

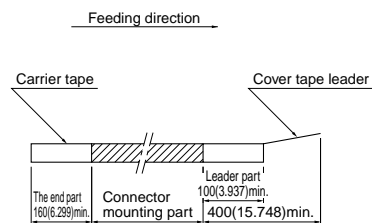

(24 to 30 circuits)

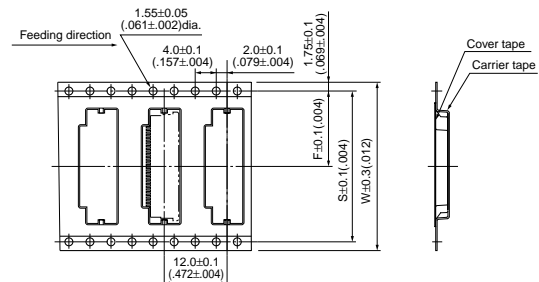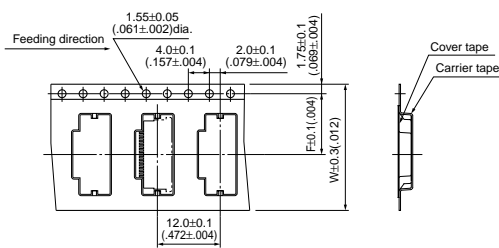


Circuits	Taping dimensions mm(.in.)				Q'ty / reel
	F	S	W	W1	
6 to 7	7.5(.295)	—	16.0(.630)	17.5(.689)	2,000
9 to 22	11.5(.453)	—	24.0(.945)	25.5(1.004)	2,000
24 to 30	14.2(.559)	28.4(1.118)	32.0(1.260)	33.5(1.319)	2,000


**Note:**

- Specifications conform to JIS C 0806. The tape width, connector loading recess square hole dimensions, etc. are determined by the number of circuits and external shape of the connector to be loaded.
- Specifications are subject to change without prior notice.

## Lead section dimensions of FPC

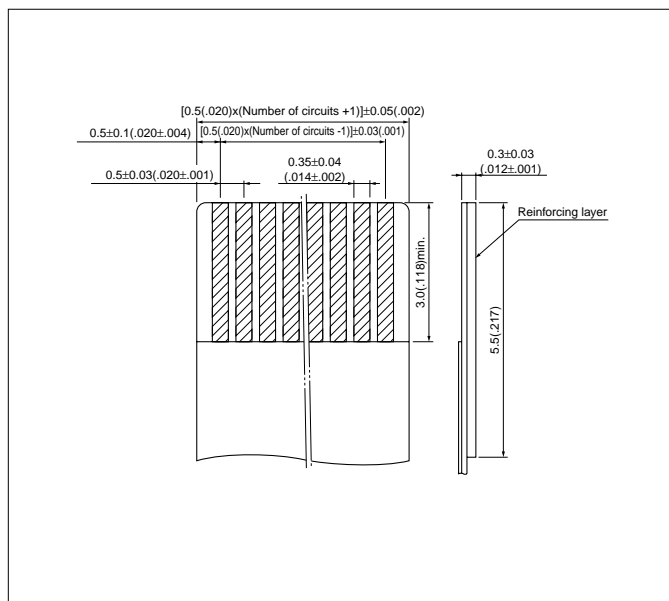

## PC board layout (viewed from component side)

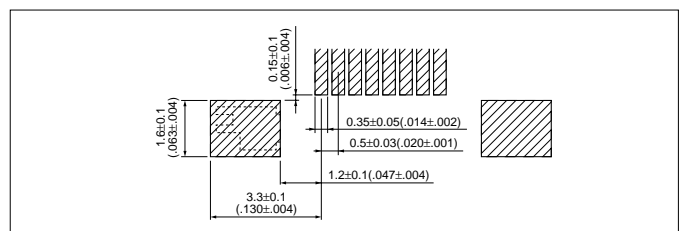

**Note:**

- Tolerances are non-cumulative:  $\pm 0.03\text{mm}(\pm .001")$  for all centers.
- The dimensions above should serve as a guideline. Contact JST for details.

## Assembly layout

