



Input Voltage up to 265 VAC
1 or 2 outputs up to 30 VDC
3000 VAC I/O Electric Strength Test Voltage



- Class II equipment (double or reinforced insulation)
- Short circuit protection
- Compact, low cost solution

Model Selection

Output 1		Output 2		Input Voltage V_i	Rated Power $T_A = 50\text{ }^\circ\text{C}$ $P_{o\text{ tot}}$ [W]	Type
$V_{o\text{ nom}}$ [VDC]	$I_{o\text{ nom}}$ [A]	$V_{o\text{ nom}}$ [VDC]	$I_{o\text{ nom}}$ [A]			
3.3	3	-	-	85 - 265 VAC 47 - 63 Hz	10	LHR1101-2
3.3	7	-	-		23	LGR1101-2
5	2	-	-		10	LHR1001-2
5	5	-	-		25	LGR1001-2
12	0.84	-	-		10	LHR1301-2
12	2.1	-	-		25	LGR1301-2
15	0.67	-	-		10	LHR1501-2
15	1.7	-	-		25	LGR1501-2
24	0.42	-	-		10	LHR1601-2
24	1	-	-		24	LGR1601-2
+5	2.5	+12	1		24	LGR2020-2
+12	0.42	-12	-0.42		10	LHR2320-2
+12	1	-12	-1		24	LGR2320-2
+15	0.335	-15	-0.335		10	LHR2540-2
+15	0.8	-15	-0.8		24	LGR2540-2

Model numbers highlighted in yellow or shaded are not recommended for new designs.

Input

Input voltage	continuous range	85 - 265 V AC
Input frequency		47 - 63 Hz
Inrush current limitation	by thermistor, $V_i = 230$ V AC	< 40 A

Output

Efficiency	230 V AC, $I_{o\ nom}$	up to 86%
Output voltage switching noise	$V_{i\ nom}$, $I_{o\ nom}$, 20 MHz bandwidth, peak to peak	< 1 %
Line regulation	$V_{i\ min} - V_{i\ max}$, $I_{o\ nom}$	± 1 %
Load regulation	$V_{i\ nom}$, 0 - $I_{o\ nom}$	± 2 %
Minimum load	single output models	0 %
	dual output models recommended	20 %
Hold-up time	230 V AC, $I_{o\ nom}$	> 10 ms

Protection

Output overload	Hic-cup characteristic	
No load and short-circuit		protected

Control

Trim for V_o	single output models only	± 10 %
----------------	---------------------------	--------

Safety and EMC

Safety marks	UL, CuL, LGA, CE	
Electric strength test voltage	I/O	3000 V AC
Electrostatic discharge	IEC/EN 61000-4-2, level 4 (15 kV)	criterion A
Electromagnetic field	IEC/EN 61000-4-3, level 3 (10 V/m)	criterion A
Electr.fast transient/burst	IEC/EN 61000-4-4, level 3 (2 kV)	criterion A
Surge	IEC/EN 61000-4-5, level 3 (2 kV)	criterion A
Electromagnetic emissions	CISPR 22/EN 55022, conducted	class B

Environmental


Ambient temperature	$V_{i\ nom}$, $I_{o\ nom}$, convection cooled	-10 to 50°C
Storage temperature	non operational	-40 to 100°C
Relative humidity	non condensing	5 - 95%
Shock	peak acceleration	20 g_n
Random vibration		2 $g_{n\ rms}$

Mechanical Data


Tolerances ± 0.3 mm (0.012") unless otherwise indicated.



LHR Series

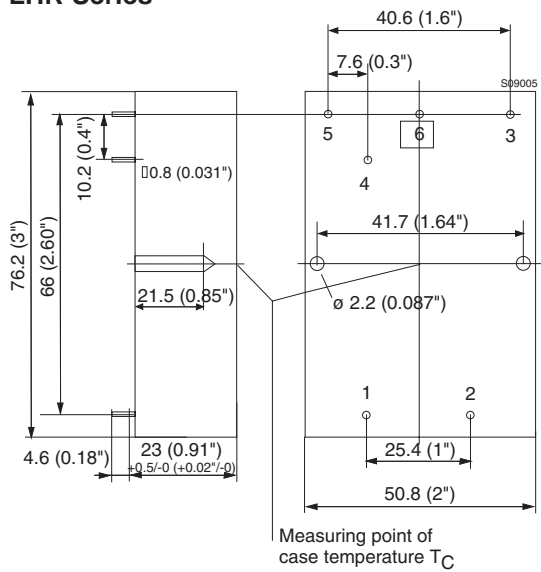

LGR Series

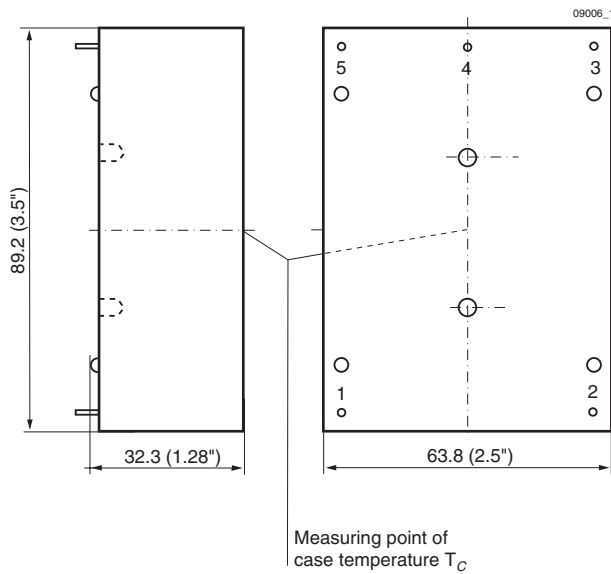

Pin Allocation

Pin no.	Electrical determination	LHR		LGR		
		Single	Dual	Single	Dual +/-	Dual +/-+
1	Input voltage	L	L	L	L	L
2	Input voltage	N	N	N	N	N
3	Output voltage (positive)	Vo+	Vo+	Vo+	Vo+	Vo1+
4	Output voltage (negative)	-	-	Vo-	-	-
	Output voltage (common return)	-	-	-	Com	Com
	Control input Trim	Trim	-	-	-	-
5	Output voltage (negative or positive)	-	Vo-	-	Vo-	Vo2+
	Output voltage (negative)	Vo-	-	-	-	-
	Control input	-	-	Trim	-	-
6	Output voltage (common return)	n.c.	Com	-	-	-

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.