

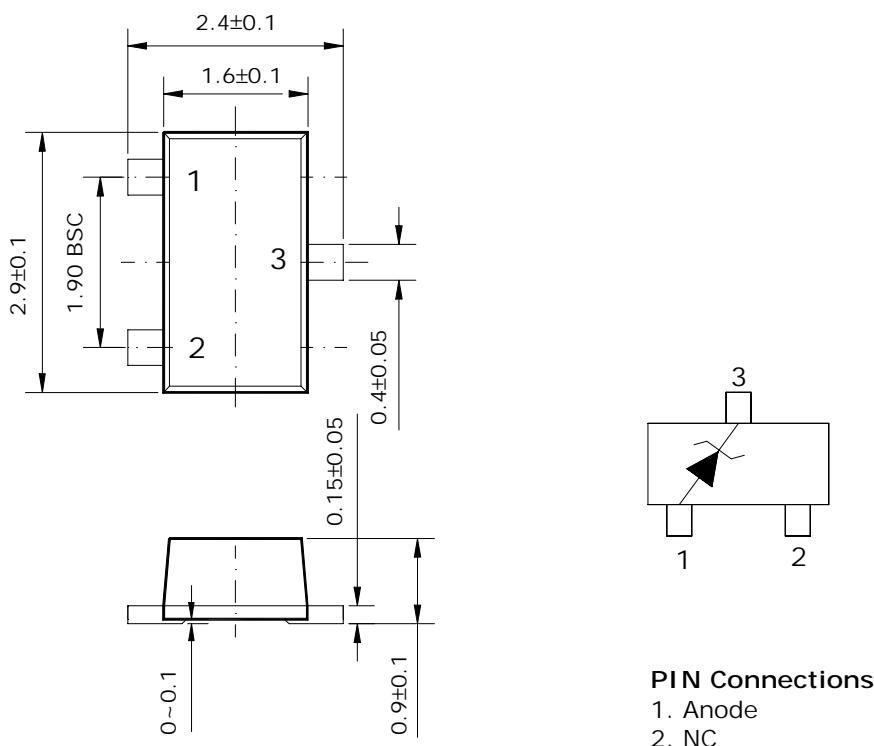
Features

- Compact type
- Radiation size 1.6mm × 2.9mm
- Surface mount lead configuration

Ordering Information

| Type NO. | Marking | Package Code |
|----------|---------|--------------|
| SDZ22VF | Y8 | SOT-23F |

Outline Dimensions

unit : mm


Absolute maximum ratings

(Ta=25°C)

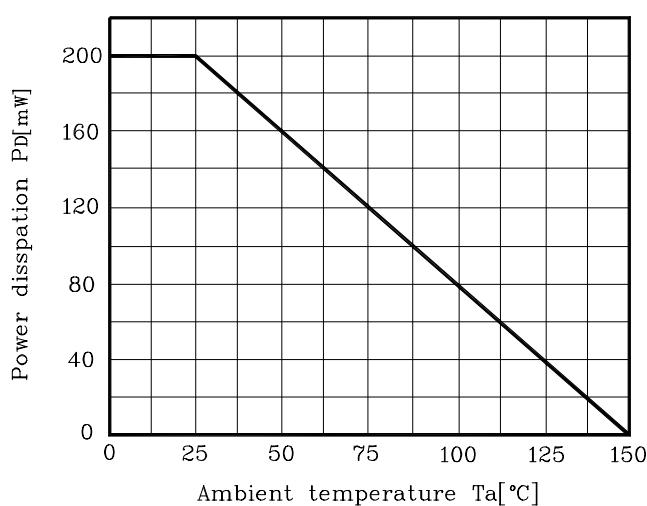
| Characteristic | Symbol | Ratings | Unit |
|----------------------|------------------|---------|------|
| Power dissipation | P _D | 200 | mW |
| Junction temperature | T _j | 150 | °C |
| Storage temperature | T _{stg} | -55~150 | °C |

Electrical Characteristics

(Ta=25°C)

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|------------------------|-----------------|------------------------|-------|------|-------|------|
| Zener voltage | V _Z | I _Z =5mA | 21.01 | - | 22.99 | V |
| Dynamic impedance | Z _{ZT} | I _Z =5mA | - | - | 55 | Ω |
| KNEE dynamic impedance | Z _{ZK} | I _Z =0.25mA | - | - | 600 | Ω |
| Reverse current | I _R | V _R =17V | - | - | 0.1 | μA |

Electrical Characteristic Curves

Fig. 1 P_D-T_a**Fig. 2 I_Z-V_Z**