

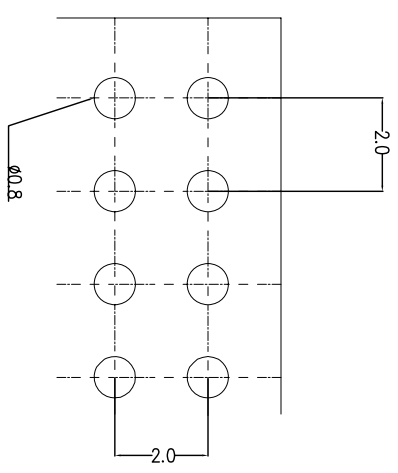
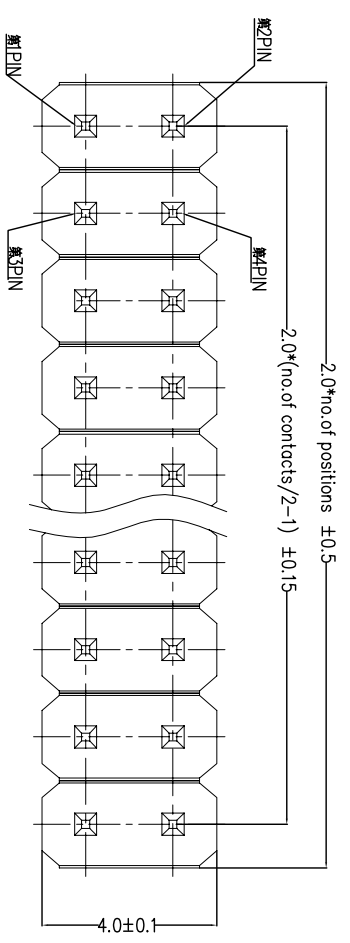


REV.	DESCRIPTION	DATE

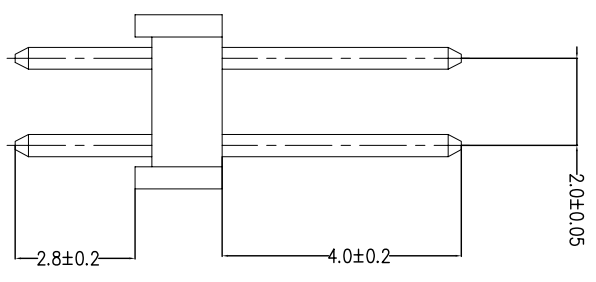

- NOTE:**
- Material:**
- 1.Housing: Polyester, UL94V-0.
  - 2.Terminal: Copper alloy. Gold-plated.
- Electrical:**
- 1.Current rating: 2 Amp.
  2. Insulator resistance: 3000MΩ Min.
  3. Dielectric withstand: AC 1000 V.
  4. Temperature: -40°C ~ +105°C

Available pins: 04~80 contacts.

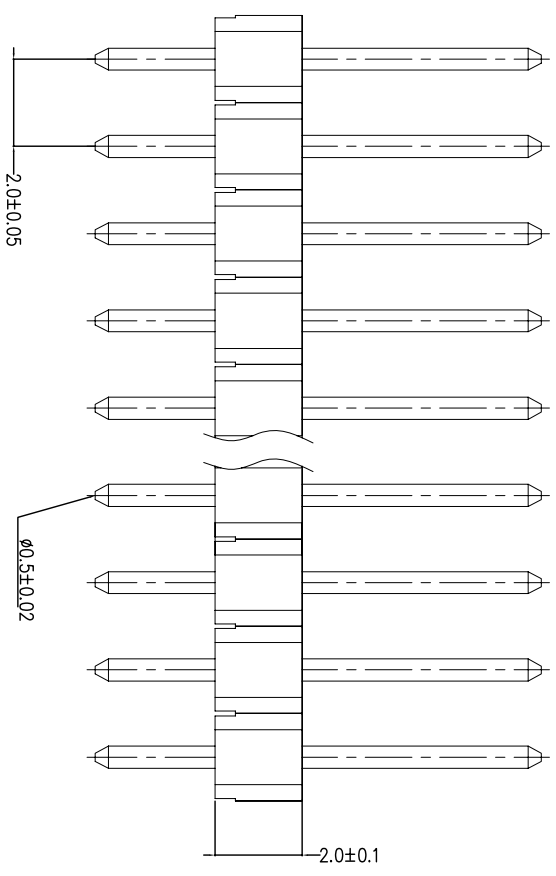

<p>TOLERANCE</p> <p>X ±.XX</p> <p>.XX ±.XX</p> <p>.XXX ±.XX</p>	<p>DRAWER</p> <p><i>Chiu Chuan Siu</i></p>	<p><b>SynLight</b> 日亮電子科技有限公司</p> <p><i>Sun-Light Electronic Technologies Inc.</i></p>
	<p>CHECK</p> <p><i>Shi Jony Siu</i></p>	
<p>UNITS : mm</p> <p>SCALE FREE</p>	<p>DESIGNED</p> <p><i>Chiu Chuan Siu</i></p>	<p>NAME</p> <p>2.0mm Pin Header 180° 雙排 Double row</p>
	<p>APPROVAL</p> <p><i>Shaw Jony Siu</i></p>	
<p>PART NO.</p> <p>P200-H20-D180</p>	<p>DATE</p> <p>12 / 10 / 2010</p>	<p>DRAW NO.</p> <p>P200-H20-D180</p>
<p>SHEET</p> <p>1 OF 1</p>	<p>SIZE</p> <p>A4</p>	<p>REV.</p> <p>A</p>