


2SC5658-HF (NPN)

RoHS Device
Halogen Free



Features



- Low Cob.

Mechanical data

- Case: SOT-723, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.

Circuit diagram

- 1.BASE
- 2.EMITTER
- 3.COLLECTOR

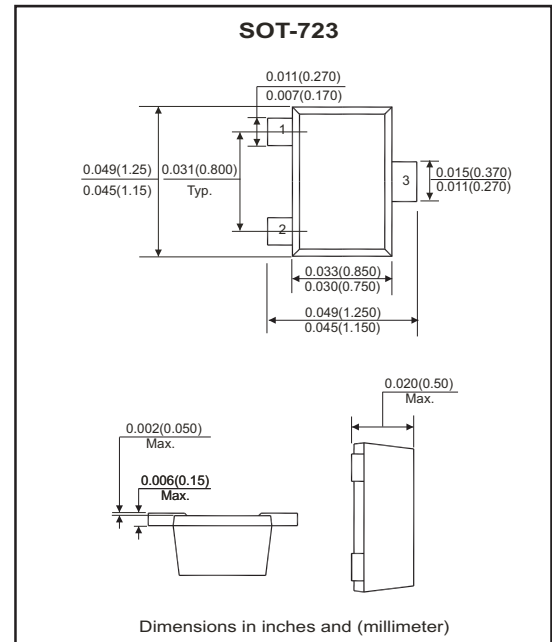

Absolute Maximum Ratings

(at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base voltage	V_{CB0}	60	V
Collector-Emitter voltage	V_{CE0}	50	V
Emitter-Base voltage	V_{EB0}	7	V
Collector current- continuous	I_C	150	mA
Collector dissipation	P_C	100	mW
Junction temperature	T_J	150	$^{\circ}\text{C}$
Storage temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Electrical Characteristics (at $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CB0}$	$I_C = 50\mu\text{A}$, $I_E = 0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CE0}$	$I_C = 1\text{mA}$, $I_B = 0$	50			V
Emitter-base breakdown voltage	$V_{(BR)EB0}$	$I_E = 50\mu\text{A}$, $I_C = 0$	7			V
Collector cut-off current	I_{CB0}	$V_{CB} = 60\text{V}$, $I_E = 0$			0.1	μA
Emitter cut-off current	I_{EB0}	$V_{EB} = 7\text{V}$, $I_C = 0$			0.1	μA
DC current transfer ratio	h_{FE}	$V_{CE} = 6\text{V}$, $I_C = 1\text{mA}$	120		560	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 50\text{mA}$, $I_B = 5\text{mA}$			0.4	V
Transition frequency	f_T	$V_{CE} = 12\text{V}$, $I_C = 2\text{mA}$ $f = 100\text{MHz}$		180		MHz
Output capacitance	C_{ob}	$V_{CB} = 12\text{V}$, $I_E = 0$ $f = 1\text{MHz}$			3.5	pF

Rank	Q	R	S
Range	120~270	180~390	270~560

RATING AND CHARACTERISTIC CURVES (2SC5658-HF)

Fig.1 - Static Characteristic

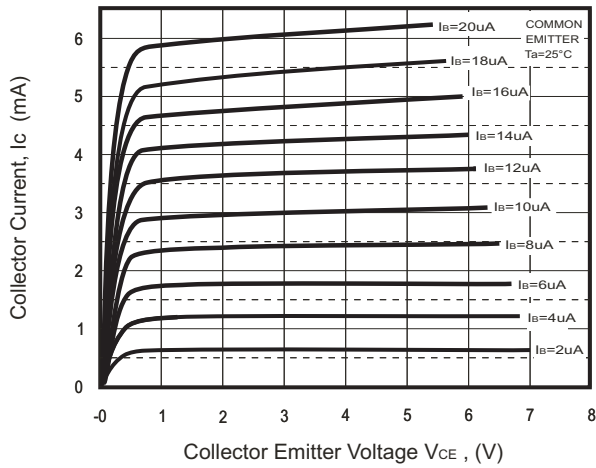


Fig.2 - $h_{FE} - I_c$

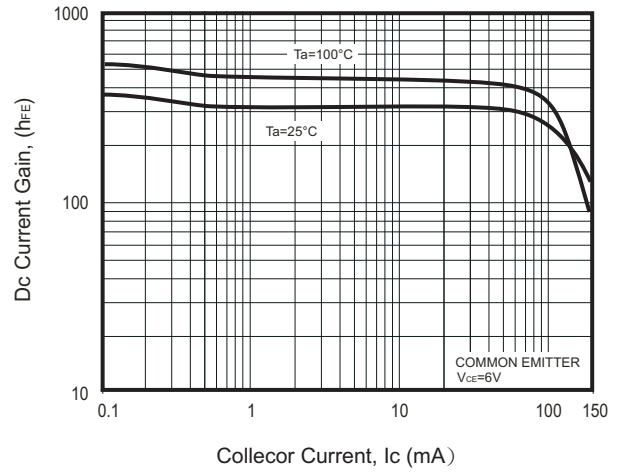


Fig.3 - $V_{BEsat} - I_c$

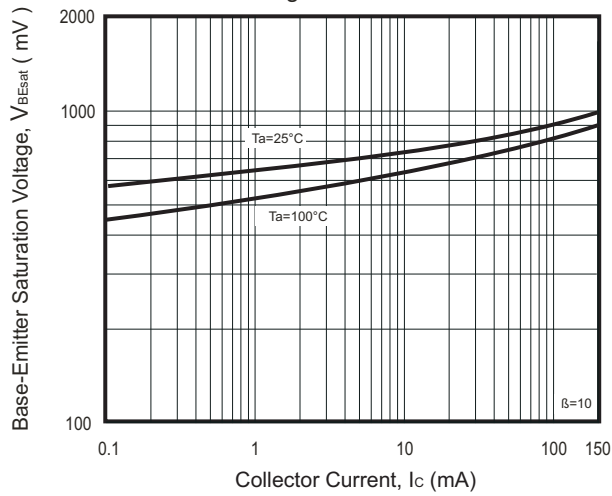


Fig.4 - $V_{CEsat} - I_c$

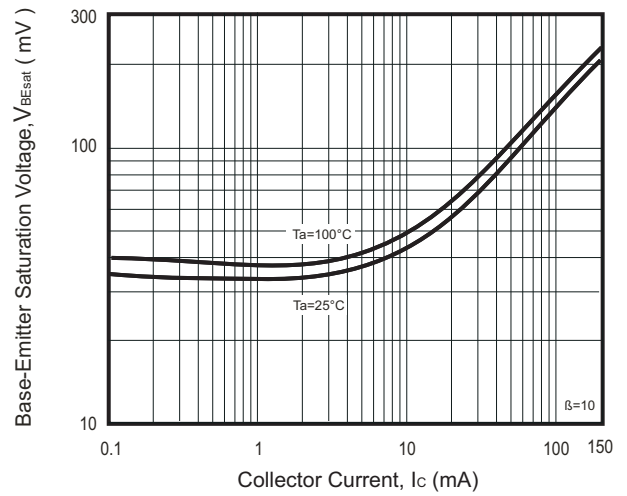


Fig.5 - $I_c - V_{BE}$


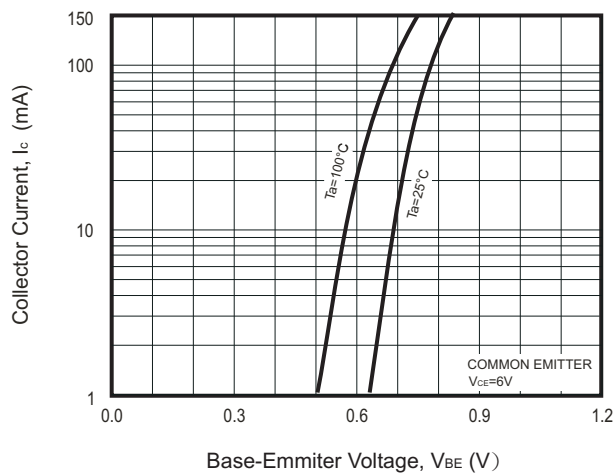


Fig.5 - $f_T - I_c$

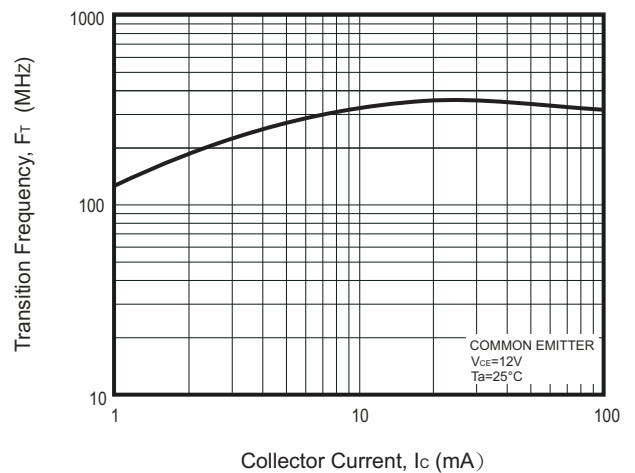

RATING AND CHARACTERISTIC CURVES (2S5658-HF)

Fig.7 - C_{ob}/C_{ib} — V_{CB}/V_{EB}






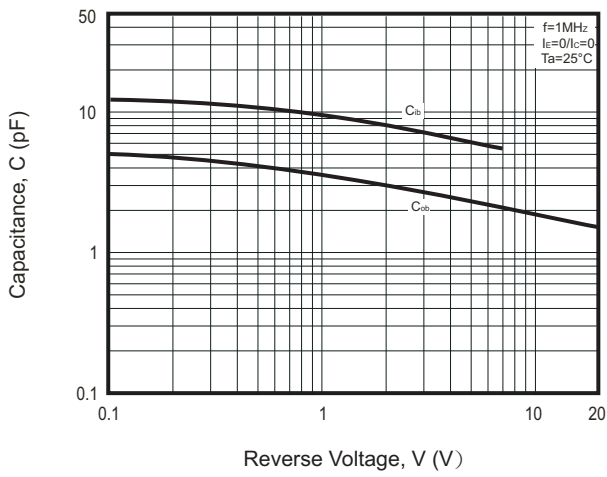


Fig.8 - P_c — T_a

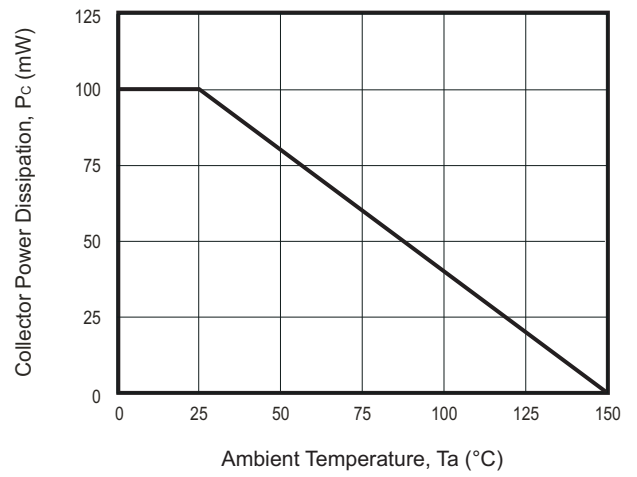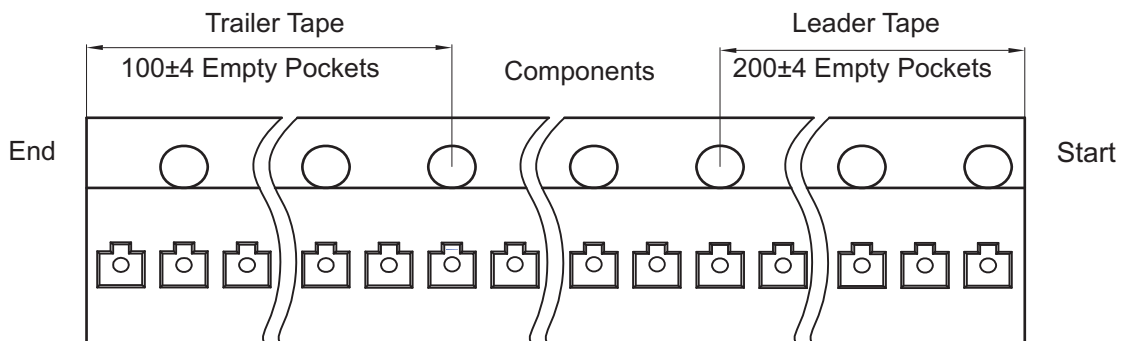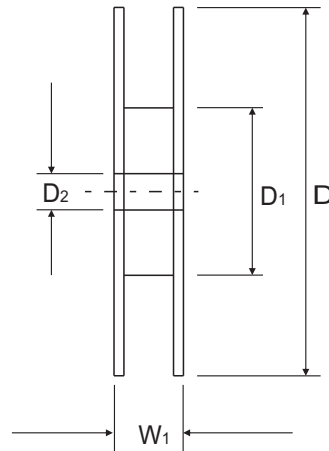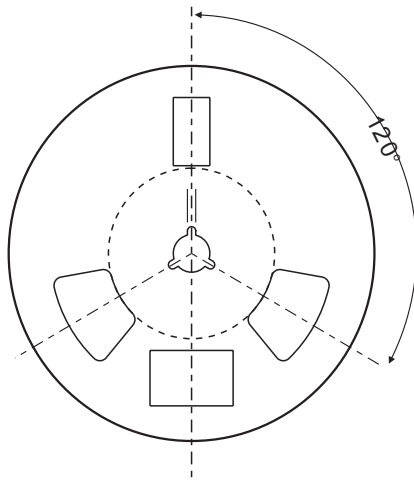

Reel Taping Specification

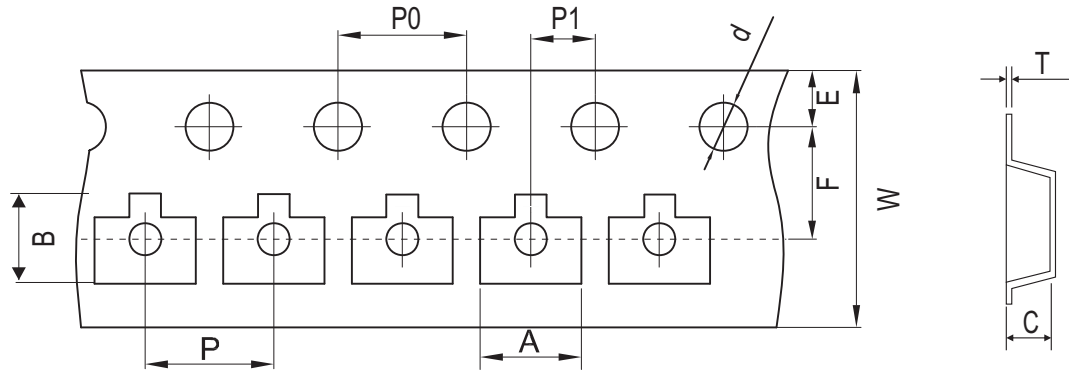


SOT-723	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.33 ± 0.05	1.45 ± 0.05	0.61 ± 0.05	1.50 ± 0.10	178 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.052 ± 0.002	0.057 ± 0.002	0.024 ± 0.002	0.059 ± 0.004	7.008 ± 0.078	2.142 ± 0.039	0.512 ± 0.039

SOT-723	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	2.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.079 ± 0.004	0.158 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039

Company reserves the right to improve product design, functions and reliability without notice.

Marking Code


Part Number	Rank	Marking Code
2SC5658-HF	Q	BQ
	R	BR
	S	BS

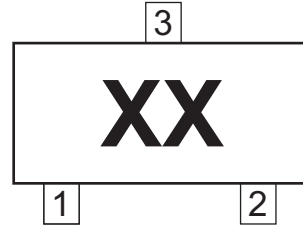

xx = Product type marking code

Suggested PAD Layout

SIZE	SOT-723	
	(mm)	(inch)
A	0.42	0.017
B	0.30	0.012
C	0.30	0.012
D	0.32	0.013
E	0.80	0.031
F	1.00	0.039

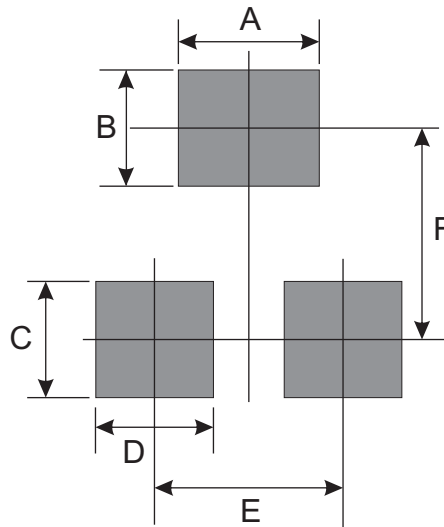

Standard Packaging

Case Type	Qty Per Reel	Reel Size
	(Pcs)	(inch)
SOT-723	8,000	7