


- Combines one thru three level wrapost with pluggable solder tail.
- Suitable for use as an interconnect socket with intermediate wire-wrapped connections.
- Hi-Rel, 4-finger #30 clip rated at 3 amps. See page 208 for details.
- Uses M-M #2601, 2602 or 2603 pins. See page 163 for details.

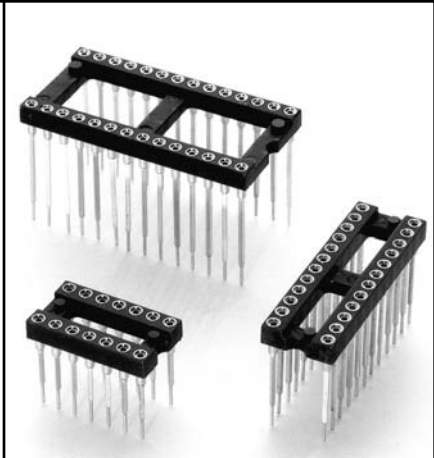

| Total number of pins | | | | Quantity per tube | Ordering Information | | |
|--------------------------|-----|-----|-----|-------------------|------------------------------|------------------------------|------------------------------|
| | A | B | C | | L = .425 (1 level = .232) | L = .543 (2 level = .350) | L = .661 (3 level = .469) |
| | 10 | 0.5 | 0.2 | | 0.3 | 40 | 126-XX-210-41-001 |
| 4 | 0.2 | 0.3 | 0.4 | 102 | 126-XX-304-41-001 | 126-XX-304-41-002 | 126-XX-304-41-003 |
| 6 | 0.3 | 0.3 | 0.4 | 67 | 126-XX-306-41-001 | 126-XX-306-41-002 | 126-XX-306-41-003 |
| 8 | 0.4 | 0.3 | 0.4 | 50 | 126-XX-308-41-001 | 126-XX-308-41-002 | 126-XX-308-41-003 |
| 10 | 0.5 | 0.3 | 0.4 | 40 | 126-XX-310-41-001 | 126-XX-310-41-002 | 126-XX-310-41-003 |
| 14 | 0.7 | 0.3 | 0.4 | 28 | 126-XX-314-41-001 | 126-XX-314-41-002 | 126-XX-314-41-003 |
| 16 | 0.8 | 0.3 | 0.4 | 25 | 126-XX-316-41-001 | 126-XX-316-41-002 | 126-XX-316-41-003 |
| 18 | 0.9 | 0.3 | 0.4 | 22 | 126-XX-318-41-001 | 126-XX-318-41-002 | 126-XX-318-41-003 |
| 20 | 1.0 | 0.3 | 0.4 | 20 | 126-XX-320-41-001 | 126-XX-320-41-002 | 126-XX-320-41-003 |
| 22 | 1.1 | 0.3 | 0.4 | 18 | 126-XX-322-41-001 | 126-XX-322-41-002 | 126-XX-322-41-003 |
| 24 | 1.2 | 0.3 | 0.4 | 16 | 126-XX-324-41-001 | 126-XX-324-41-002 | 126-XX-324-41-003 |
| 28 | 1.4 | 0.3 | 0.4 | 14 | 126-XX-328-41-001 | 126-XX-328-41-002 | 126-XX-328-41-003 |
| 20 | 1.0 | 0.4 | 0.5 | 20 | 126-XX-420-41-001 | 126-XX-420-41-002 | 126-XX-420-41-003 |
| 22 | 1.1 | 0.4 | 0.5 | 18 | 126-XX-422-41-001 | 126-XX-422-41-002 | 126-XX-422-41-003 |
| 24 | 1.2 | 0.4 | 0.5 | 16 | 126-XX-424-41-001 | 126-XX-424-41-002 | 126-XX-424-41-003 |
| 28 | 1.4 | 0.4 | 0.5 | 14 | 126-XX-428-41-001 | 126-XX-428-41-002 | 126-XX-428-41-003 |
| 32 | 1.6 | 0.4 | 0.5 | 12 | 126-XX-432-41-001 | 126-XX-432-41-002 | 126-XX-432-41-003 |
| 24 | 1.2 | 0.6 | 0.7 | 16 | 126-XX-624-41-001 | 126-XX-624-41-002 | 126-XX-624-41-003 |
| 28 | 1.4 | 0.6 | 0.7 | 14 | 126-XX-628-41-001 | 126-XX-628-41-002 | 126-XX-628-41-003 |
| 32 | 1.6 | 0.6 | 0.7 | 12 | 126-XX-632-41-001 | 126-XX-632-41-002 | 126-XX-632-41-003 |
| 36 | 1.8 | 0.6 | 0.7 | 11 | 126-XX-636-41-001 | 126-XX-636-41-002 | 126-XX-636-41-003 |
| 40 | 2.0 | 0.6 | 0.7 | 10 | 126-XX-640-41-001 | 126-XX-640-41-002 | 126-XX-640-41-003 |
| 42 | 2.1 | 0.6 | 0.7 | 9 | 126-XX-642-41-001 | 126-XX-642-41-002 | 126-XX-642-41-003 |
| 48 | 2.4 | 0.6 | 0.7 | 8 | 126-XX-648-41-001 | 126-XX-648-41-002 | 126-XX-648-41-003 |
| 50 | 2.5 | 0.6 | 0.7 | 8 | 126-XX-650-41-001 | 126-XX-650-41-002 | 126-XX-650-41-003 |
| 52 | 2.6 | 0.6 | 0.7 | 7 | 126-XX-652-41-001 | 126-XX-652-41-002 | 126-XX-652-41-003 |
| 50 | 2.5 | 0.9 | 1.0 | | 126-XX-950-41-001 | 126-XX-950-41-002 | 126-XX-950-41-003 |
| 52 | 2.6 | 0.9 | 1.0 | | 126-XX-952-41-001 | 126-XX-952-41-002 | 126-XX-952-41-003 |
| 64 | 3.2 | 0.9 | 1.0 | | 126-XX-964-41-001 | 126-XX-964-41-002 | 126-XX-964-41-003 |
| SPECIFY PLATING CODE XX= | | | | | 13 | | 93 |
| Sleeve (Pin) | | | | | 10μ" Au | | 200μ" Sn/Pb |
| Contact (Clip) | | | | | 30μ" Au | | 30μ" Au |