

UTC78TXXA LINEAR INTEGRATED CIRCUIT


3-TERMINAL 1A POSITIVE VOLTAGE REGULATOR

DESCRIPTION

The UTC 78TXXA family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 1 A.


FEATURES

- *Peak output current up to 1 A
- *Fixed output voltage of 3.3V, 4.7V, 5V, 6V, 7V, 8V, 9V, 10V, 12V, 15V, 18V and 24V available
- *Thermal overload shutdown protection
- *Short circuit current limiting
- *Output transistor SOA protection

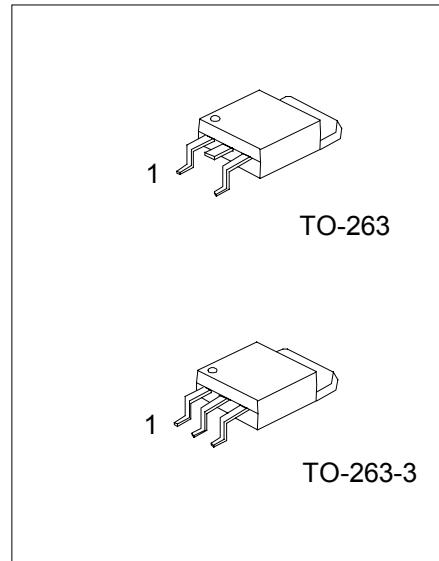

1: Input 2: GND 3: Output

TEST CIRCUIT

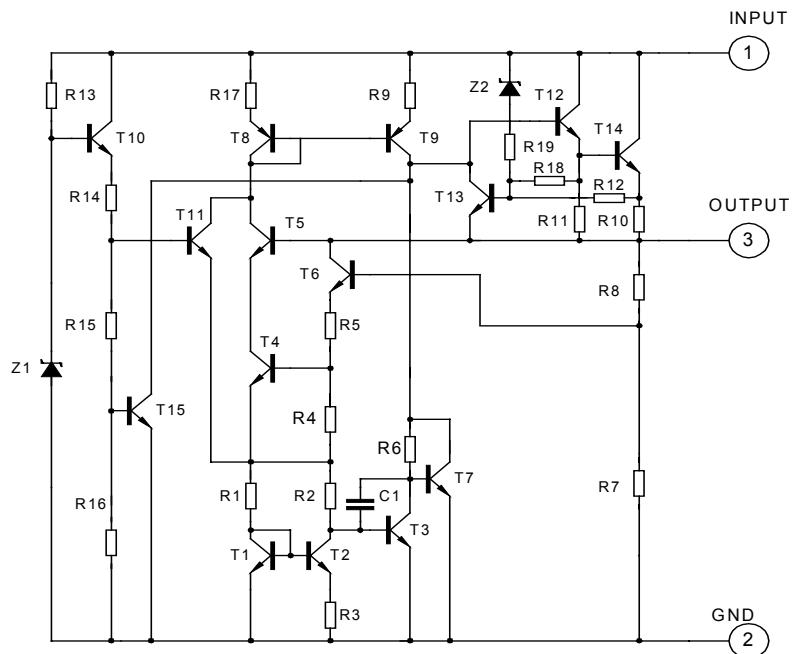

UTC UNISONIC TECHNOLOGIES CO., LTD.

1

QW-R101-011,E

UTC78TXXA LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Input voltage (for $V_o=3.3\sim 18V$) (for $V_o=24V$)	V_i	35 40	V
Output Current	I_o	1	A
Power Dissipation	P_D	Internally Limited	W
Operating Junction Temperature Range	T_{opr}	-20 ~ +150	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C

UTC 78T33A ELECTRICAL CHARACTERISTICS

($V_i=5.8V$, $I_o=0.5A$, $T_j=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$	3.168	3.30	3.432	V
		$V_i=5.8V$ to $18.3V$, $I_o=5mA - 1.0A$, $P_D \leq 15W$	3.135		3.465	V
Load Regulation	ΔV_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$		33	mV	
		$T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$		17	mV	
Line regulation	ΔV_o	$V_i = 5.8V$ to $18.3V$, $T_j=25^{\circ}C$		33	mV	
		$V_i = 5.8V$ to $18.3V$, $T_j=25^{\circ}C$, $I_o=1.0A$		33	mV	
Quiescent Current	I_q	$T_j=25^{\circ}C$, $I_o \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_q	$V_i = 5.8V$ to $18.3V$		1.0	mA	
		$I_o=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$	55		μV	
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_o=5mA$	-0.4		$mV/^{\circ}C$	
Ripple Rejection	RR	$V_i=6.3V-16.3V$, $f=120Hz$, $T_j=25^{\circ}C$	57		dB	
Peak Output Current	I_{PK}	$T_j=25^{\circ}C$	1.8		A	
Short-Circuit Current	I_{SC}	$V_i=35V$, $T_j=25^{\circ}C$	250		mA	
Dropout Voltage	V_d	$T_j=25^{\circ}C$	2.0		V	

UTC 78T47A ELECTRICAL CHARACTERISTICS

($V_i=9.7V$, $I_o=0.5A$, $T_j=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$	4.512	4.70	4.888	V
		$V_i = 7.2V$ to $19.7V$, $I_o=5mA - 1.0A$, $P_D \leq 15W$	4.465		4.935	V
Load Regulation	ΔV_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$		47	mV	
		$T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$		24	mV	
Line regulation	ΔV_o	$V_i = 7.2V$ to $19.7V$, $T_j=25^{\circ}C$		47	mV	
		$V_i = 7.2V$ to $19.7V$, $T_j=25^{\circ}C$, $I_o=1.0A$		47	mV	
Quiescent Current	I_q	$T_j=25^{\circ}C$, $I_o \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_q	$V_i = 7.2V$ to $19.7V$		1.0	mA	
		$I_o=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$	40		μV	
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_o=5mA$	-0.6		$mV/^{\circ}C$	
Ripple Rejection	RR	$V_i = 7.7V - 17.7V$, $f=120Hz$, $T_j=25^{\circ}C$	62	80		dB
Peak Output Current	I_{PK}	$T_j=25^{\circ}C$	1.8		A	
Short-Circuit Current	I_{SC}	$V_i=35V$, $T_j=25^{\circ}C$	250		mA	
Dropout Voltage	V_d	$T_j=25^{\circ}C$	2.0		V	

UTC 78TXXA LINEAR INTEGRATED CIRCUIT

UTC 78T05A ELECTRICAL CHARACTERISTICS

($V_I=10V$, $I_O=0.5A$, $T_J=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$	4.80	5.0	5.20	V
		$V_I = 7.5V$ to $20V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	4.75		5.25	V
Load Regulation	ΔV_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$		50	mV	
		$T_J=25^{\circ}C$, $I_O=0.25A - 0.75A$		25	mV	
Line regulation	ΔV_o	$V_I = 7V$ to $25V$, $T_J=25^{\circ}C$		50	mV	
		$V_I = 7.5V$ to $20V$, $T_J=25^{\circ}C$, $I_O=1.0A$		50	mV	
Quiescent Current	I_q	$T_J=25^{\circ}C$, $I_O \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_q	$V_I = 7.5V$ to $20V$		1.0	mA	
		$I_O=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		40		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-0.6		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I = 8V - 18V$, $f=120Hz$, $T_J=25^{\circ}C$	62	80		dB
Peak Output Current	I_{PK}	$T_J=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_J=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_J=25^{\circ}C$		2.0		V

UTC 78T06A ELECTRICAL CHARACTERISTICS

($V_I=11V$, $I_O=0.5A$, $T_J=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$	5.76	6.0	6.24	V
		$V_I = 8.5V$ to $21V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	5.70		6.30	V
Load Regulation	ΔV_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$		60	mV	
		$T_J=25^{\circ}C$, $I_O=0.25A - 0.75A$		30	mV	
Line regulation	ΔV_o	$V_I = 8V$ to $25V$, $T_J=25^{\circ}C$		60	mV	
		$V_I = 8.5V$ to $21V$, $T_J=25^{\circ}C$, $I_O=1.0A$		60	mV	
Quiescent Current	I_q	$T_J=25^{\circ}C$, $I_O \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_q	$V_I = 8.5V$ to $21V$		1.0	mA	
		$I_O=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		45		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-0.7		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I = 9V - 19V$, $f=120Hz$, $T_J=25^{\circ}C$	59	75		dB
Peak Output Current	I_{PK}	$T_J=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_J=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_J=25^{\circ}C$		2.0		V

UTC 78TXXA LINEAR INTEGRATED CIRCUIT

UTC 78T07A ELECTRICAL CHARACTERISTICS

($V_I=13V$, $I_O=0.5A$, $T_j=0^\circ C - 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$	6.72	7.0	7.28	V
		$V_I = 9.5V$ to $22V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	6.65		7.35	V
Load Regulation	ΔV_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$		70	mV	
		$T_j=25^\circ C$, $I_O=0.25A - 0.75A$		35	mV	
Line regulation	ΔV_o	$V_I = 9V$ to $25V$, $T_j=25^\circ C$		70	mV	
		$V_I = 9.5V$ to $22V$, $T_j=25^\circ C$, $I_O=1.0A$		70	mV	
Quiescent Current	I_Q	$T_j=25^\circ C$, $I_O \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_Q	$V_I = 9.5V$ to $22V$		1.0	mA	
		$I_O=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		50		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-0.8		$mV/^\circ C$
Ripple Rejection	RR	$V_I = 10V - 20V$, $f=120Hz$, $T_j=25^\circ C$	59	75		dB
Peak Output Current	I_{PK}	$T_j=25^\circ C$		1.7		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^\circ C$		250		mA
Dropout Voltage	V_d	$T_j=25^\circ C$		2.0		V

UTC 78T08A ELECTRICAL CHARACTERISTICS

($V_I=14V$, $I_O=0.5A$, $T_j=0^\circ C - 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$	7.68	8.0	8.32	V
		$V_I = 10.5V$ to $23V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	7.60		8.40	V
Load Regulation	ΔV_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$		80	mV	
		$T_j=25^\circ C$, $I_O=0.25A - 0.75A$		40	mV	
Line regulation	ΔV_o	$V_I = 10.5V$ to $25V$, $T_j=25^\circ C$		80	mV	
		$V_I = 10.5V$ to $23V$, $T_j=25^\circ C$, $I_O=1.0A$		80	mV	
Quiescent Current	I_Q	$T_j=25^\circ C$, $I_O \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_Q	$V_I = 10.5V$ to $23V$		1.0	mA	
		$I_O=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		58		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-0.9		$mV/^\circ C$
Ripple Rejection	RR	$V_I = 11.5V$ to $21.5V$, $f=120Hz$, $T_j=25^\circ C$	56	72		dB
Peak Output Current	I_{PK}	$T_j=25^\circ C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^\circ C$		250		mA
Dropout Voltage	V_d	$T_j=25^\circ C$		2.0		V

UTC78TXXA LINEAR INTEGRATED CIRCUIT

UTC 78T09A ELECTRICAL CHARACTERISTICS

($V_I=15V$, $I_O=0.5A$, $T_j=0^\circ C - 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$	8.64	9.0	9.36	V
		$V_I = 11.5V$ to 24V, $I_O=5mA - 1.0A$, $P_D \leq 15W$	8.55		9.45	V
Load Regulation	ΔV_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$		90	mV	
		$T_j=25^\circ C$, $I_O=0.25A - 0.75A$		45	mV	
Line regulation	ΔV_o	$V_I = 11.5V$ to 25 V, $T_j=25^\circ C$		90	mV	
		$V_I = 11.5V$ to 24V, $T_j=25^\circ C$, $I_O=1.0A$		90	mV	
Quiescent Current	I_q	$T_j=25^\circ C$, $I_O \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_q	$V_I = 11.5V$ to 24V		1.0	mA	
		$I_O=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$	58		μV	
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-1.1		$mV/^\circ C$
Ripple Rejection	RR	$V_I = 12.5V$ to 22.5V, $f=120Hz$, $T_j=25^\circ C$	56	72		dB
Peak Output Current	I_{PK}	$T_j=25^\circ C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^\circ C$	250			mA
Dropout Voltage	V_d	$T_j=25^\circ C$	2.0			V

UTC 78T10A ELECTRICAL CHARACTERISTICS

($V_I=16V$, $I_O=0.5A$, $T_j=0^\circ C - 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$	9.60	10.0	10.40	V
		$V_I = 12.5V$ to 25V, $I_O=5mA - 1.0A$, $P_D \leq 15W$	9.50		10.50	V
Load Regulation	ΔV_o	$T_j=25^\circ C$, $I_O=5mA - 1.0A$		100	mV	
		$T_j=25^\circ C$, $I_O=0.25A - 0.75A$		50	mV	
Line regulation	ΔV_o	$V_I = 13V$ to 25V, $T_j=25^\circ C$		100	mV	
		$V_I = 13V$ to 25V, $T_j=25^\circ C$, $I_O=1.0A$		100	mV	
Quiescent Current	I_q	$T_j=25^\circ C$, $I_O \leq 1.0A$		8.0	mA	
Quiescent Current Change	ΔI_q	$V_I = 12.6V$ to 25V		1.0	mA	
		$I_O=5mA - 1.0A$		0.5	mA	
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$	58		μV	
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-1.1		$mV/^\circ C$
Ripple Rejection	RR	$V_I = 13V - 23V$, $f=120Hz$, $T_j=25^\circ C$	56	72		dB
Peak Output Current	I_{PK}	$T_j=25^\circ C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^\circ C$	250			mA
Dropout Voltage	V_d	$T_j=25^\circ C$	2.0			V

UTC 78TXXA LINEAR INTEGRATED CIRCUIT

UTC 78T12A ELECTRICAL CHARACTERISTICS

($V_I=19V$, $I_O=0.5A$, $T_J=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$	11.52	12.0	12.48	V
		$V_I = 14.5V$ to $27V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	11.40		12.60	V
Load Regulation	ΔV_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$			120	mV
		$T_J=25^{\circ}C$, $I_O=0.25A - 0.75A$			60	mV
Line regulation	ΔV_o	$V_I = 14.5V$ to $30V$, $T_J=25^{\circ}C$			120	mV
		$V_I = 14.6V$ to $27V$, $T_J=25^{\circ}C$, $I_O=1.0A$			120	mV
Quiescent Current	I_q	$T_J=25^{\circ}C$, $I_O \leq 1.0A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 14.5V$ to $30V$			1.0	mA
		$I_O=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		75		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-1.5		$mV/{}^{\circ}C$
Ripple Rejection	RR	$V_I = 15V - 25V$, $f=120Hz$, $T_J=25^{\circ}C$	55	72		dB
Peak Output Current	I_{PK}	$T_J=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_J=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_J=25^{\circ}C$		2.0		V

UTC 78T15A ELECTRICAL CHARACTERISTICS

($V_I=23V$, $I_O=0.5A$, $T_J=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$	14.40	15.0	15.60	V
		$V_I = 17.5V$ to $30V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	14.25		15.75	V
Load Regulation	ΔV_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$			150	mV
		$T_J=25^{\circ}C$, $I_O=0.25A - 0.75A$			75	mV
Line regulation	ΔV_o	$V_I = 18.5V$ to $30V$, $T_J=25^{\circ}C$			150	mV
		$V_I = 17.7V$ to $30V$, $T_J=25^{\circ}C$, $I_O = 1.0A$			150	mV
Quiescent Current	I_q	$T_J=25^{\circ}C$, $I_O \leq 1.0A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 17.5V$ to $30V$			1.0	mA
		$I_O=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		90		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-1.8		$mV/{}^{\circ}C$
Ripple Rejection	RR	$V_I = 18.5V$ to $28.5V$, $f=120Hz$, $T_J=25^{\circ}C$	54	70		dB
Peak Output Current	I_{PK}	$T_J=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_J=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_J=25^{\circ}C$		2.0		V

UTC78TXXA LINEAR INTEGRATED CIRCUIT

UTC 78T18A ELECTRICAL CHARACTERISTICS

($V_I=27V$, $I_O=0.5A$, $T_J=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$	17.28	18.0	18.72	V
		$V_I=21V$ to $33V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	17.10		18.90	V
Load Regulation	ΔV_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$			180	mV
		$T_J=25^{\circ}C$, $I_O=0.25A - 0.75A$			90	mV
Line regulation	ΔV_o	$V_I=21V$ to $33V$, $T_J=25^{\circ}C$			180	mV
		$V_I=21V$ to $33V$, $T_J=25^{\circ}C$, $I_O = 1.0A$			180	mV
Quiescent Current	I_Q	$T_J=25^{\circ}C$, $I_O \leq 1.0A$			8.0	mA
Quiescent Current Change	ΔI_Q	$V_I=21.5V$ to $33V$			1.0	mA
		$I_O=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		110		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-2.2		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I=22V - 32V$, $f=120Hz$, $T_J=25^{\circ}C$	53	69		dB
Peak Output Current	I_{PK}	$T_J=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_J=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_J=25^{\circ}C$		2.0		V

UTC 78T24A ELECTRICAL CHARACTERISTICS

($V_I=33V$, $I_O=0.5A$, $T_J=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$	23.04	24.0	24.96	V
		$V_I=27V$ to $38V$, $I_O=5mA - 1.0A$, $P_D \leq 15W$	22.80		25.20	V
Load Regulation	ΔV_o	$T_J=25^{\circ}C$, $I_O=5mA - 1.0A$			240	mV
		$T_J=25^{\circ}C$, $I_O=0.25A - 0.75A$			120	mV
Line regulation	ΔV_o	$V_I=27V$ to $38V$, $T_J=25^{\circ}C$			240	mV
		$V_I=27V$ to $38V$, $T_J=25^{\circ}C$, $I_O=1.0A$			240	mV
Quiescent Current	I_Q	$T_J=25^{\circ}C$, $I_O \leq 1.0A$			8.0	mA
Quiescent Current Change	ΔI_Q	$V_I=28V$ to $38V$			1.0	mA
		$I_O=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		170		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_O=5mA$		-2.8		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I=28V - 38V$, $f=120Hz$, $T_J=25^{\circ}C$	50	66		dB
Peak Output Current	I_{PK}	$T_J=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_J=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_J=25^{\circ}C$		2.0		V

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represents pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation<0.5W

UTC78TXXA LINEAR INTEGRATED CIRCUIT

APPLICATION CIRCUIT

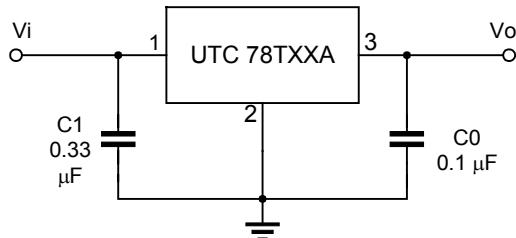

Note 1: To specify an output voltage, substitute voltage value for "XX".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

UTC UNISONIC TECHNOLOGIES CO., LTD. 8