


.100" x .100" Pin Strip Header

Double Row Dual Insulator Pin Strip Headers

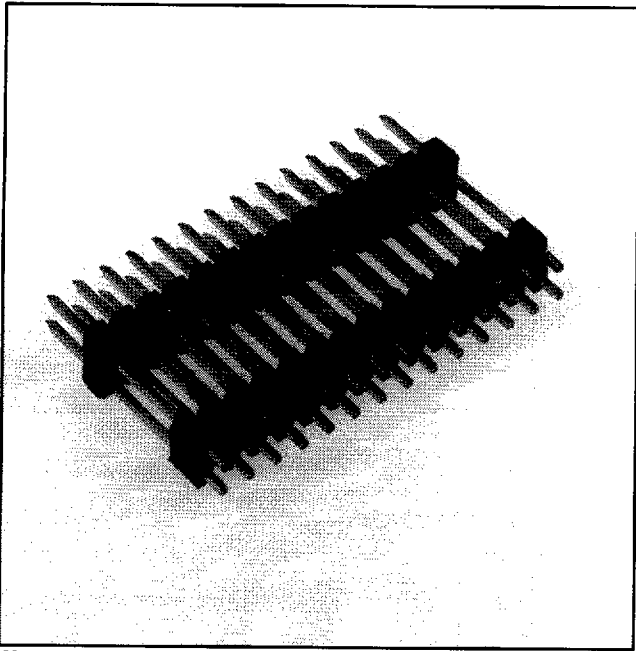

- 2 to 72 positions
- Standard .025" square posts
- .100" spacing between posts
- Dual insulation
- 3 board to board spacings

66

TS-0547-01
Sheet 1 of 2

Physical

Insulation

Material: Glass Filled Polyester
Flammability: UL 94V-0
Color: Black

Contact

Material: Copper Alloy (C725)
Plating
Underplate: 50 μ " [1.27 μ m] Nickel — QQ-N-290, Class 2
Wiping Area: 10 μ " [0.25 μ m] Gold — MIL-G-45204, Type II, Grade C

Electrical

Current Rating: 2.5 A
Insulation Resistance: $>5 \times 10^9 \Omega$ at 500 Vdc
Withstanding Voltage: 1500 Vrms at Sea Level

Environmental

Temperature Rating: -40°C to $+105^\circ\text{C}$

UL File No.: E68080
CSA File No.: LR 46900

3M Electronic Products Division

6801 River Place Blvd.
Austin, TX 78726-9000


■ 9005413 0000174 T3T ■

.100" x .100" Pin Strip Header

Double Row Dual Insulator Pin Strip Headers


Sheet 2 of 2

TS-0547-01

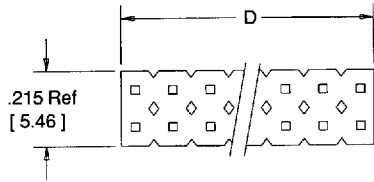

Part Number	A	B	C
924227-24	.238	.728	.380
924227-28	.235	.845	.500
924227-32	.240	.980	.630

Pin Qty Code	Dim C (Max) See Note 1
01	.10 [2.5]
02	.20 [5.1]
03	.30 [7.6]
04	.40 [10.2]
05	.50 [12.7]
06	.60 [15.2]
07	.70 [17.8]
08	.80 [20.3]
09	.90 [22.9]
10	1.00 [25.4]
11	1.10 [27.9]
12	1.20 [30.5]
13	1.30 [33.0]
14	1.40 [35.6]
15	1.50 [38.1]
16	1.60 [40.6]
17	1.70 [43.2]
18	1.80 [45.7]
19	1.90 [48.3]
20	2.00 [50.8]
21	2.10 [53.3]
22	2.20 [55.9]
23	2.30 [58.4]
24	2.40 [61.0]
25	2.50 [63.5]
26	2.60 [66.0]
27	2.70 [68.6]
28	2.80 [71.1]
29	2.90 [73.7]
30	3.00 [76.2]
31	3.10 [78.7]
32	3.20 [81.3]
33	3.30 [83.8]
34	3.40 [86.4]
35	3.50 [88.9]
36	3.60 [91.4]

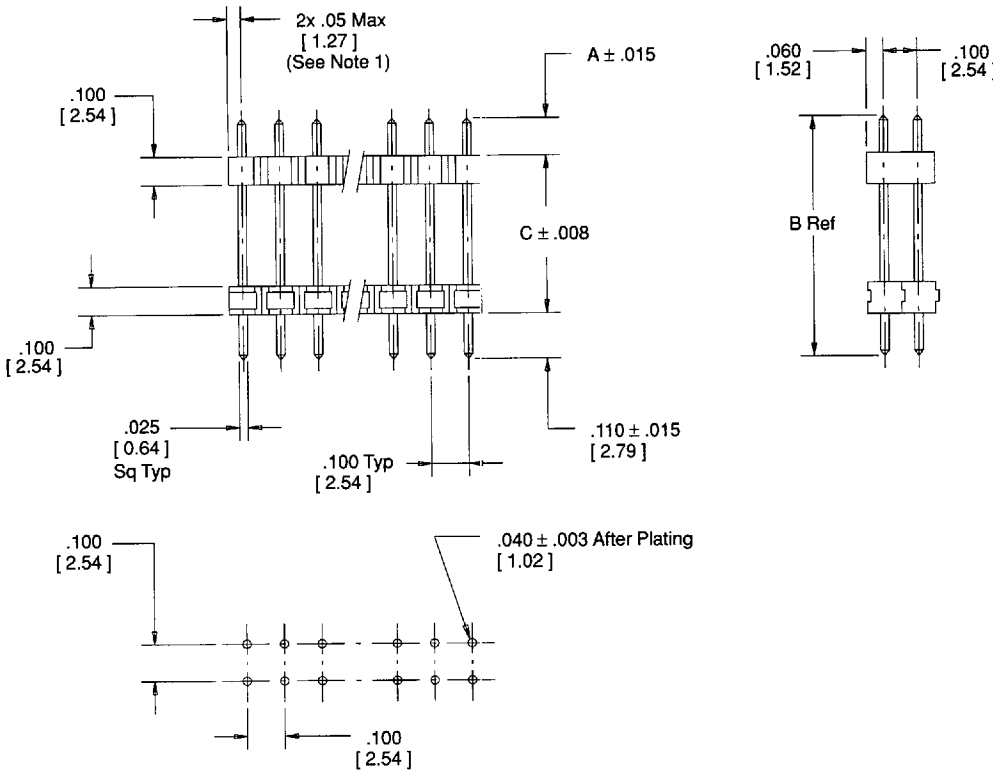

Recommended Hole Pattern

Notes:

1. Dimension D is a maximum when the pin strip is cut to length, not when the strip is broken to length.
2. Board pin retention feature available: change from "924" to "9R4" when ordering.

Inch
[mm]

	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference Only

Ordering Information

924227-XX-XX-I

Board Spacing
24 - .38
28 - .50
32 - .63

The number of pins
per row 1 through 36