



MOTOROLA

## MC7800 Series

# Three-Terminal Positive Voltage Regulators

These voltage regulators are monolithic integrated circuits designed as fixed-voltage regulators for a wide variety of applications including local, on-card regulation. These regulators employ internal current limiting, thermal shutdown, and safe-area compensation. With adequate heatsinking they can deliver output currents in excess of 1.0 A. Although designed primarily as a fixed voltage regulator, these devices can be used with external components to obtain adjustable voltages and currents.


- Output Current in Excess of 1.0 A
- No External Components Required
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting
- Output Transistor Safe-Area Compensation
- Output Voltage Offered in 2% and 4% Tolerance
- Available in Surface Mount D<sup>2</sup>PAK and Standard 3-Lead Transistor Packages

### THREE-TERMINAL POSITIVE FIXED VOLTAGE REGULATORS

#### SEMICONDUCTOR TECHNICAL DATA


T SUFFIX  
PLASTIC PACKAGE  
CASE 221A

Heatsink surface  
connected to Pin 2.

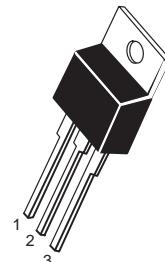

Pin 1. Input  
2. Ground  
3. Output

D2T SUFFIX  
PLASTIC PACKAGE  
CASE 936  
(D<sup>2</sup>PAK)



Heatsink surface (shown as terminal 4 in  
case outline drawing) is connected to Pin 2.

#### DEVICE TYPE/NOMINAL OUTPUT VOLTAGE


MC7805	5.0 V	MC7812	12 V
MC7806	6.0 V	MC7815	15 V
MC7808	8.0 V	MC7818	18 V
MC7809	9.0 V	MC7824	24 V

#### ORDERING INFORMATION

Device	Output Voltage Tolerance	Operating Temperature Range	Package
MC78XXACT	2%	$T_J = 0^\circ \text{ to } +125^\circ\text{C}$	Insertion Mount
MC78XXACD2T			Surface Mount
MC78XXCT	4%	$T_J = -40^\circ \text{ to } +125^\circ\text{C}$	Insertion Mount
MC78XXCD2T			Surface Mount
MC78XXBT		$T_J = -40^\circ \text{ to } +125^\circ\text{C}$	Insertion Mount
MC78XXBD2T			Surface Mount

XX indicates nominal voltage.

#### STANDARD APPLICATION

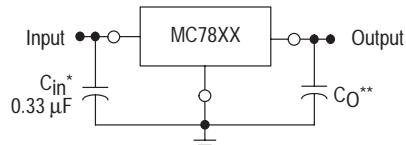

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0 V above the output voltage even during the low point on the input ripple voltage.

XX, These two digits of the type number indicate nominal voltage.

\*  $C_{in}$  is required if regulator is located an appreciable distance from power supply filter.


\*\*  $C_O$  is not needed for stability; however, it does improve transient response. Values of less than 0.1  $\mu\text{F}$  could cause instability.

# MC7800 Series

**MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted.)

Rating	Symbol	Value	Unit
Input Voltage (5.0 – 18 V) (24 V)	$V_I$	35 40	Vdc
Power Dissipation Case 221A $T_A = 25^\circ\text{C}$ Thermal Resistance, Junction-to-Ambient Thermal Resistance, Junction-to-Case	$P_D$ $R_{\theta JA}$ $R_{\theta JC}$	Internally Limited 65 5.0	W °C/W °C/W
Case 936 (D <sup>2</sup> PAK) $T_A = 25^\circ\text{C}$ Thermal Resistance, Junction-to-Ambient Thermal Resistance, Junction-to-Case	$P_D$ $R_{\theta JA}$ $R_{\theta JA}$	Internally Limited See Figure 13 5.0	W °C/W °C/W
Storage Junction Temperature Range	$T_{stg}$	-65 to +150	°C
Operating Junction Temperature	$T_J$	+150	°C

**Representative Schematic Diagram**

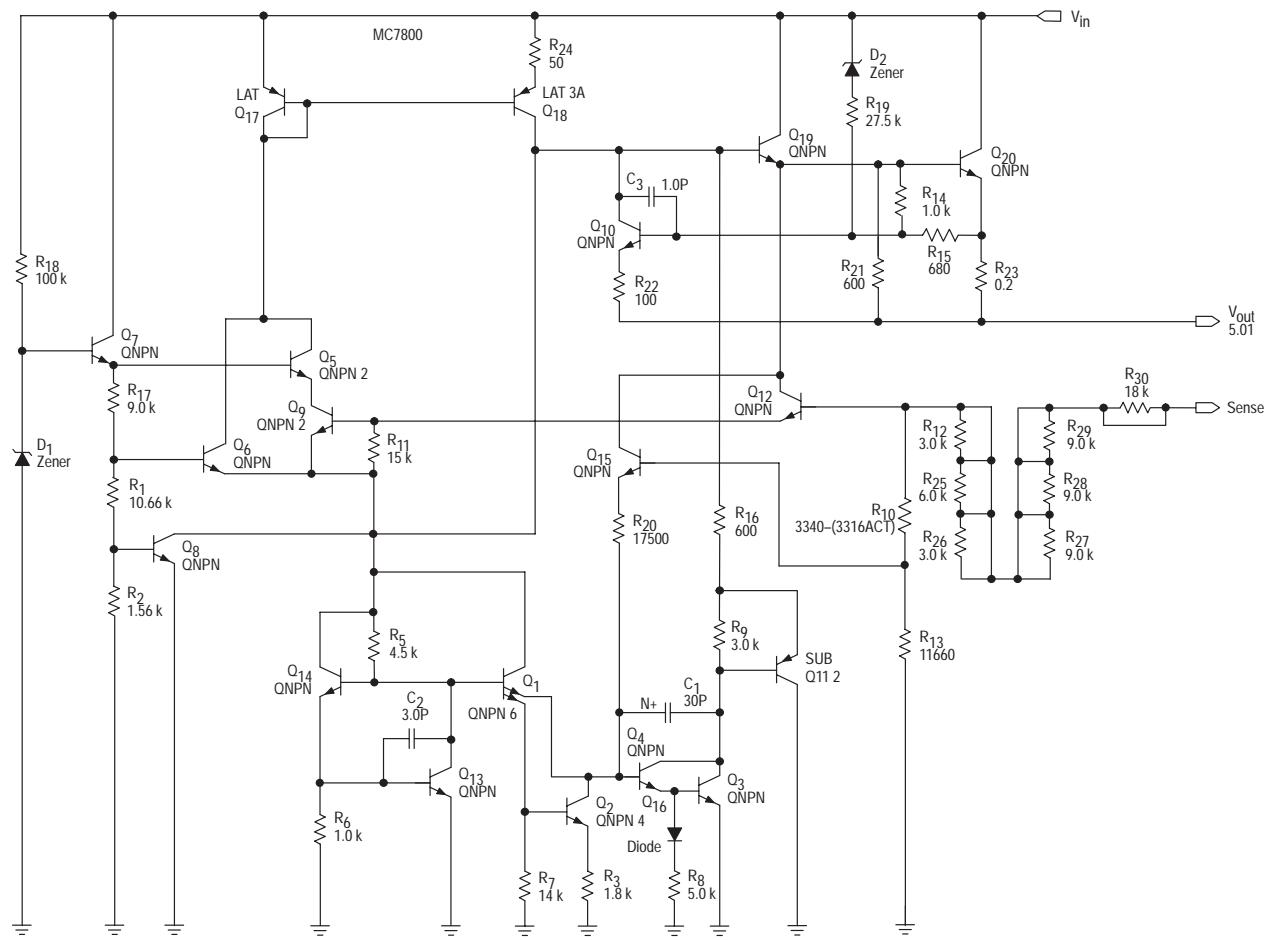

This device contains 22 active transistors.

## **MC7800 Series**

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 10$  V,  $I_O = 500$  mA,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7805B			MC7805C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	4.8	5.0	5.2	4.8	5.0	5.2	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $7.0 \text{ Vdc} \leq V_{in} \leq 20 \text{ Vdc}$ $8.0 \text{ Vdc} \leq V_{in} \leq 20 \text{ Vdc}$	$V_O$	— 4.75	— 5.0	— 5.25	4.75	5.0	5.25	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $7.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $8.0 \text{ Vdc} \leq V_{in} \leq 12 \text{ Vdc}$	Regline	— —	5.0 1.3	100 50	— —	5.0 1.3	100 50	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	— —	1.3 0.15	100 50	— —	1.3 0.15	100 50	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.2	8.0	—	3.2	8.0	mA
Quiescent Current Change $7.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $8.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	— — —	— 1.3 0.5	— — —	— — —	— — —	1.3 — 0.5	mA
Ripple Rejection $8.0 \text{ Vdc} \leq V_{in} \leq 18 \text{ Vdc}$ , $f = 120 \text{ Hz}$	RR	—	68	—	—	68	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	0.9	—	—	0.9	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-0.3	—	—	-0.3	—	$\text{mV}/^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 10$  V,  $I_O = 1.0$  A,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7805AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	4.9	5.0	5.1	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $7.5 \text{ Vdc} \leq V_{in} \leq 20 \text{ Vdc}$	$V_O$	4.8	5.0	5.2	Vdc
Line Regulation (Note 2) $7.5 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $8.0 \text{ Vdc} \leq V_{in} \leq 12 \text{ Vdc}$ $8.0 \text{ Vdc} \leq V_{in} \leq 12 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $7.3 \text{ Vdc} \leq V_{in} \leq 20 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	5.0	50	mV
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	1.3	100	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	—	6.0	mA
Quiescent Current Change $8.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $7.5 \text{ Vdc} \leq V_{in} \leq 20 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	—	—	0.8	mA

**NOTES:** 1.  $T_{low} = 0^{\circ}\text{C}$  for MC78XXAC, C  
 $= -40^{\circ}\text{C}$  for MC78XXB       $T_{high} = +125^{\circ}\text{C}$  for MC78XXAC, C, B

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## MC7800 Series

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{IN} = 10$  V,  $I_O = 1.0$  A,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7805AC			Unit
		Min	Typ	Max	
Ripple Rejection 8.0 Vdc $\leq$ V <sub>in</sub> $\leq$ 18 Vdc, f = 120 Hz, I <sub>O</sub> = 500 mA	RR	–	68	–	dB
Dropout Voltage (I <sub>O</sub> = 1.0 A, T <sub>J</sub> = 25°C)	V <sub>I</sub> – V <sub>O</sub>	–	2.0	–	Vdc
Output Noise Voltage (T <sub>A</sub> = 25°C) 10 Hz $\leq$ f $\leq$ 100 kHz	V <sub>n</sub>	–	10	–	µV/V/O
Output Resistance (f = 1.0 kHz)	r <sub>O</sub>	–	0.9	–	mΩ
Short Circuit Current Limit (T <sub>A</sub> = 25°C) V <sub>in</sub> = 35 Vdc	I <sub>SC</sub>	–	0.2	–	A
Peak Output Current (T <sub>J</sub> = 25°C)	I <sub>max</sub>	–	2.2	–	A
Average Temperature Coefficient of Output Voltage	TCV <sub>O</sub>	–	-0.3	–	mV/°C

## **ELECTRICAL CHARACTERISTICS** ( $V_{in} = 11$ V, $I_O = 500$ mA, $T_J = T_{low}$ to $T_{high}$ [Note 1], unless otherwise noted.)

Characteristic		Symbol	MC7806B			MC7806C			Unit
			Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$		5.75	6.0	6.25	5.75	6.0	6.25	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $8.0 \text{ Vdc} \leq V_{in} \leq 21 \text{ Vdc}$ $9.0 \text{ Vdc} \leq V_{in} \leq 21 \text{ Vdc}$	$V_O$		— 5.7	— 6.0	— 6.3	5.7 —	6.0 —	6.3 —	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $8.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $9.0 \text{ Vdc} \leq V_{in} \leq 13 \text{ Vdc}$	Regline		— —	5.5 1.4	120 60	— —	5.5 1.4	120 60	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload		— —	1.3 0.2	120 60	— —	1.3 0.2	120 60	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.3	8.0	—	3.3	8.0	mA	
Quiescent Current Change $8.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $9.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$		— — —	— 1.3 0.5	— — —	— — —	— — —	1.3 — 0.5	mA
Ripple Rejection $9.0 \text{ Vdc} \leq V_{in} \leq 19 \text{ Vdc}$ , $f = 120 \text{ Hz}$	RR		—	65	—	—	65	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	—	2.0	—	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$		—	10	—	—	10	—	$\mu\text{V}/V_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	0.9	—	—	0.9	—	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$		—	0.2	—	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	—	2.2	—	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	—0.3	—	—	—	—0.3	—	$\text{mV}/^\circ\text{C}$

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B  
                   $= -40^\circ\text{C}$  for MC78XXB

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## **MC7800 Series**

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 11$  V,  $I_O = 1.0$  A,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7806AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	5.88	6.0	6.12	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $8.6 \text{ Vdc} \leq V_{in} \leq 21 \text{ Vdc}$	$V_O$	5.76	6.0	6.24	Vdc
Line Regulation (Note 2) $8.6 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $9.0 \text{ Vdc} \leq V_{in} \leq 13 \text{ Vdc}$ $9.0 \text{ Vdc} \leq V_{in} \leq 13 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $8.3 \text{ Vdc} \leq V_{in} \leq 21 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	5.0	60	mV
		—	1.4	60	
		—	1.4	30	
		—	4.5	60	
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	1.3	100	mV
		—	0.9	100	
		—	0.2	50	
		—	—	—	
Quiescent Current $T_J = 25^\circ\text{C}$	$I_B$	—	—	6.0	mA
		—	3.3	6.0	
Quiescent Current Change $9.0 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $8.6 \text{ Vdc} \leq V_{in} \leq 21 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	—	—	0.8	mA
		—	—	0.8	
		—	—	0.5	
		—	—	—	
Ripple Rejection	RR	—	65	—	dB
$9.0 \text{ Vdc} \leq V_{in} \leq 19 \text{ Vdc}$ , $f = 120 \text{ Hz}$ , $I_O = 500 \text{ mA}$					
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance ( $f = 1.0 \text{ kHz}$ )	$r_O$	—	0.9	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCVO$	—	-0.3	—	$\text{mV}/\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 14$  V,  $I_O = 500$  mA,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7808B			MC7808C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	7.7	8.0	8.3	7.7	8.0	8.3	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $10.5 \text{ Vdc} \leq V_{in} \leq 23 \text{ Vdc}$ $11.5 \text{ Vdc} \leq V_{in} \leq 23 \text{ Vdc}$	$V_O$	— 7.6	— 8.0	— 8.4	7.6 —	8.0 —	8.4 —	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ , (Note 2) $10.5 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ $11 \text{ Vdc} \leq V_{in} \leq 17 \text{ Vdc}$	Regline	— —	6.0 1.7	160 80	— —	6.0 1.7	160 80	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	— —	1.4 .22	160 80	— —	1.4 .22	160 80	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.3	8.0	—	3.3	8.0	mA

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  
 $= -40^\circ\text{C}$  for MC78XXB       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## **MC7800 Series**

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{IN} = 14$  V,  $I_O = 500$  mA,  $T_J = T_{LOW}$  to  $T_{HIGH}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7808B			MC7808C			Unit
		Min	Typ	Max	Min	Typ	Max	
Quiescent Current Change 10.5 Vdc $\leq$ V <sub>in</sub> $\leq$ 25 Vdc 11.5 Vdc $\leq$ V <sub>in</sub> $\leq$ 25 Vdc 5.0 mA $\leq$ I <sub>O</sub> $\leq$ 1.0 A	$\Delta I_B$	—	—	—	—	—	1.0	mA
—	—	—	—	1.0	—	—	—	—
—	—	—	—	0.5	—	—	0.5	—
Ripple Rejection 11.5 Vdc $\leq$ V <sub>in</sub> $\leq$ 18 Vdc, f = 120 Hz	RR	—	62	—	—	62	—	dB
Dropout Voltage (I <sub>O</sub> = 1.0 A, T <sub>J</sub> = 25°C)	V <sub>I</sub> – V <sub>O</sub>	—	2.0	—	—	2.0	—	Vdc
Output Noise Voltage (T <sub>A</sub> = 25°C) 10 Hz $\leq$ f $\leq$ 100 kHz	V <sub>n</sub>	—	10	—	—	10	—	$\mu$ V/V <sub>O</sub>
Output Resistance f = 1.0 kHz	r <sub>O</sub>	—	0.9	—	—	0.9	—	m $\Omega$
Short Circuit Current Limit (T <sub>A</sub> = 25°C) V <sub>in</sub> = 35 Vdc	I <sub>SC</sub>	—	0.2	—	—	0.2	—	A
Peak Output Current (T <sub>J</sub> = 25°C)	I <sub>max</sub>	—	2.2	—	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	TCV <sub>O</sub>	—	-0.4	—	—	-0.4	—	mV/ $^{\circ}$ C

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 14$  V,  $I_O = 1.0$  A,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7808AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	7.84	8.0	8.16	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $10.6 \text{ Vdc} \leq V_{in} \leq 23 \text{ Vdc}$	$V_O$	7.7	8.0	8.3	Vdc
Line Regulation (Note 2) $10.6 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $11 \text{ Vdc} \leq V_{in} \leq 17 \text{ Vdc}$ $11 \text{ Vdc} \leq V_{in} \leq 17 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $10.4 \text{ Vdc} \leq V_{in} \leq 23 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	6.0 1.7 1.7 5.0	80 80 40 80	mV
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	1.4 1.0 .22	100 100 50	mV
Quiescent Current $T_J = 25^\circ\text{C}$	$I_B$	— —	— 3.3	6.0 6.0	mA
Quiescent Current Change $11 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $10.6 \text{ Vdc} \leq V_{in} \leq 20 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	— — —	— — —	0.8 0.8 0.5	mA
Ripple Rejection $11.5 \text{ Vdc} \leq V_{in} \leq 21.5 \text{ Vdc}$ , $f = 120 \text{ Hz}$ , $I_O = 500 \text{ mA}$	RR	—	62	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	0.9	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-0.4	—	$\text{mV}/^\circ\text{C}$

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B  
 $= -40^\circ\text{C}$  for MC78XXB

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

MC7800 Series

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 15$  V,  $I_O = 500$  mA,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7809CT			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	8.65	9.0	9.35	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $11.5 \text{ Vdc} \leq V_{in} \leq 24 \text{ Vdc}$	$V_O$	8.55	9.0	9.45	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $11.5 \text{ Vdc} \leq V_{in} \leq 26 \text{ Vdc}$ $11.5 \text{ Vdc} \leq V_{in} \leq 17 \text{ Vdc}$	Regline	–	6.2	50	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	–	1.5	50	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	–	3.4	8.0	mA
Quiescent Current Change $11.5 \text{ Vdc} \leq V_{in} \leq 26 \text{ Vdc}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	–	–	1.0	mA
–	–	–	–	0.5	
Ripple Rejection	RR	–	61	–	dB
$11.5 \text{ Vdc} \leq V_{in} \leq 21.5 \text{ Vdc}$ , $f = 120 \text{ Hz}$					
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	–	2.0	–	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	–	10	–	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	–	1.0	–	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	–	0.2	–	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	–	2.2	–	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	–	-0.5	–	$\text{mV}/^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $V_{IN} = 19$  V,  $I_O = 500$  mA,  $T_J = T_{LOW}$  to  $T_{HIGH}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7812B			MC7812C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	11.5	12	12.5	11.5	12	12.5	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $14.5 \text{ Vdc} \leq V_{in} \leq 27 \text{ Vdc}$ $15.5 \text{ Vdc} \leq V_{in} \leq 27 \text{ Vdc}$	$V_O$	— 11.4	— 12	— 12.6	11.4 —	12 —	12.6 —	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $14.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $16 \text{ Vdc} \leq V_{in} \leq 22 \text{ Vdc}$	Regline	— —	7.5 2.2	240 120	— —	7.5 2.2	240 120	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	— —	1.6 1.0	240 120	— —	1.6 1.0	240 120	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.4	8.0	—	3.4	8.0	mA
Quiescent Current Change $14.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $15 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	— — —	— — —	— 1.0 0.5	— — —	— — —	1.0 — 0.5	mA
Ripple Rejection $15 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $f = 120 \text{ Hz}$	RR	—	60	—	—	60	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	—	2.0	—	Vdc

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B  
 $= -40^\circ\text{C}$  for MC78XXB

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

MC7800 Series

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{in} = 19$  V,  $I_O = 500$  mA,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7812B			MC7812C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Noise Voltage ( $T_A = 25^\circ C$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	1.1	—	—	1.1	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ C$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ C$ )	$I_{max}$	—	2.2	—	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-0.8	—	—	-0.8	—	$\text{mV}/^\circ C$

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 19$  V,  $I_O = 10$  A,  $T_J = T_{Jlow}$  to  $T_{Jhigh}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7812AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	11.75	12	12.25	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $14.8 \text{ Vdc} \leq V_{in} \leq 27 \text{ Vdc}$	$V_O$	11.5	12	12.5	Vdc
Line Regulation (Note 2) $14.8 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $16 \text{ Vdc} \leq V_{in} \leq 22 \text{ Vdc}$ $16 \text{ Vdc} \leq V_{in} \leq 22 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $14.5 \text{ Vdc} \leq V_{in} \leq 27 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	7.5	120	mV
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	1.6	100	mV
Quiescent Current $T_J = 25^\circ\text{C}$	$I_B$	—	—	6.0	mA
Quiescent Current Change $15 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $14.8 \text{ Vdc} \leq V_{in} \leq 27 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	—	—	0.8	mA
Ripple Rejection $15 \text{ Vdc} \leq V_{in} \leq 25 \text{ Vdc}$ , $f = 120 \text{ Hz}$ , $I_O = 500 \text{ mA}$	RR	—	60	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	$\mu\text{V}/V_O$
Output Resistance ( $f = 1.0 \text{ kHz}$ )	$r_O$	—	1.1	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-0.8	—	$\text{mV}/\text{C}$

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  
 $= -40^\circ\text{C}$  for MC78XXB       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## **MC7800 Series**

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 23$  V,  $I_O = 500$  mA,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7815B			MC7815C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	14.4	15	15.6	14.4	15	15.6	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $17.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $18.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$	$V_O$	— 14.25	— 15	— 15.75	14.25	15	15.75	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $17.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $20 \text{ Vdc} \leq V_{in} \leq 26 \text{ Vdc}$	Regline	— —	8.5 3.0	300 150	— —	8.5 3.0	300 150	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	— —	1.8 1.2	300 150	— —	1.8 1.2	300 150	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.5	8.0	—	3.5	8.0	mA
Quiescent Current Change $17.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $18.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	— — —	— 1.0 0.5	— — —	— — —	— — —	1.0 — 0.5	mA
Ripple Rejection $18.5 \text{ Vdc} \leq V_{in} \leq 28.5 \text{ Vdc}$ , $f = 120 \text{ Hz}$	RR	—	58	—	—	58	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	1.2	—	—	1.2	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-1.0	—	—	-1.0	—	$\text{mV}/^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 23$  V,  $I_O = 1.0$  A,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7815AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	14.7	15	15.3	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $17.9 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$	$V_O$	14.4	15	15.6	Vdc
Line Regulation (Note 2) $17.9 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $20 \text{ Vdc} \leq V_{in} \leq 26 \text{ Vdc}$ $20 \text{ Vdc} \leq V_{in} \leq 26 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $17.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	8.5	150	mV
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	1.8	100	mV
Quiescent Current $T_J = 25^\circ\text{C}$	$I_B$	—	—	6.0	mA
Quiescent Current Change $17.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $17.5 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	—	—	0.8	mA

**NOTES:** 1.  $T_{low} = 0^{\circ}\text{C}$  for MC78XXAC, C  
 $= -40^{\circ}\text{C}$  for MC78XXB       $T_{high} = +125^{\circ}\text{C}$  for MC78XXAC, C, B

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## **MC7800 Series**

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{IN} = 23$  V,  $I_O = 1.0$  A,  $T_J = T_{LOW}$  to  $T_{HIGH}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7815AC			Unit
		Min	Typ	Max	
Ripple Rejection 18.5 Vdc ≤ $V_{in}$ ≤ 28.5 Vdc, $f = 120$ Hz, $I_O = 500$ mA	RR	–	58	–	dB
Dropout Voltage ( $I_O = 1.0$ A, $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	–	2.0	–	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10$ Hz ≤ $f$ ≤ $100$ kHz	$V_n$	–	10	–	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0$ kHz	$r_O$	–	1.2	–	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35$ Vdc	$I_{SC}$	–	0.2	–	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	–	2.2	–	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	–	-1.0	–	$\text{mV}/^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $V_{IN} = 27$  V,  $I_O = 500$  mA,  $T_J = T_{LOW}$  to  $T_{HIGH}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7818B			MC7818C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	17.3	18	18.7	17.3	18	18.7	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ $22 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$	$V_O$	— 17.1	— 18	— 18.9	17.1	18	18.9	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ $24 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$	Regline	— —	9.5 3.2	360 180	— —	9.5 3.2	360 180	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	— —	2.0 1.5	360 180	— —	2.0 1.5	360 180	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.5	8.0	—	3.5	8.0	mA
Quiescent Current Change $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ $22 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	— — —	— 1.0 0.5	— — —	— — —	— — —	1.0 — 0.5	mA
Ripple Rejection $22 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ , $f = 120 \text{ Hz}$	RR	—	57	—	—	57	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_{il} - V_O$	—	2.0	—	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	1.3	—	—	1.3	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-1.5	—	—	-1.5	—	$\text{mV}/^\circ\text{C}$

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B  
                   $= -40^\circ\text{C}$  for MC78XXB

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## MC7800 Series

**ELECTRICAL CHARACTERISTICS** ( $V_{IN} = 27$  V,  $I_O = 10$  A,  $T_J = T_{LOW}$  to  $T_{HIGH}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7818AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	17.64	18	18.36	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$	$V_O$	17.3	18	18.7	Vdc
Line Regulation (Note 2) $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $24 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ $24 \text{ Vdc} \leq V_{in} \leq 30 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $20.6 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	9.5	180	mV
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	2.0	100	mV
Quiescent Current $T_J = 25^\circ\text{C}$	$I_B$	—	—	6.0	mA
Quiescent Current Change $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $21 \text{ Vdc} \leq V_{in} \leq 33 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	—	—	0.8	mA
Ripple Rejection $22 \text{ Vdc} \leq V_{in} \leq 32 \text{ Vdc}$ , $f = 120 \text{ Hz}$ , $I_O = 500 \text{ mA}$	RR	—	57	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	$\mu\text{V}/V_O$
Output Resistance $f = 1.0 \text{ kHz}$	$r_O$	—	1.3	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-1.5	—	$\text{mV}/\text{C}$

## **ELECTRICAL CHARACTERISTICS** ( $V_{in} = 33$ V, $I_O = 500$ mA, $T_J = T_{low}$ to $T_{high}$ [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7824B			MC7824C			Unit
		Min	Typ	Max	Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	23	24	25	23	24	25	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $27 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ $28 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$	$V_O$	— 22.8	— 24	— 25.2	22.8	24	25.2	Vdc
Line Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $27 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ $30 \text{ Vdc} \leq V_{in} \leq 36 \text{ Vdc}$	Regline	— —	11.5 3.8	480 240	— —	11.5 3.8	480 240	mV
Load Regulation, $T_J = 25^\circ\text{C}$ (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	— —	2.1 1.8	480 240	— —	2.1 1.8	480 240	mV
Quiescent Current ( $T_J = 25^\circ\text{C}$ )	$I_B$	—	3.6	8.0	—	3.6	8.0	mA

**NOTES:** 1.  $T_{low} = 0^\circ\text{C}$  for MC78XXAC, C  
 $= -40^\circ\text{C}$  for MC78XXB       $T_{high} = +125^\circ\text{C}$  for MC78XXAC, C, B

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## **MC7800 Series**

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{IN} = 33$  V,  $I_O = 500$  mA,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)

Characteristic	Symbol	MC7824B			MC7824C			Unit
		Min	Typ	Max	Min	Typ	Max	
Quiescent Current Change 27 Vdc ≤ $V_{in}$ ≤ 38 Vdc 28 Vdc ≤ $V_{in}$ ≤ 38 Vdc 5.0 mA ≤ $I_O$ ≤ 1.0 A	$\Delta I_B$	—	—	—	—	—	1.0	mA
—	—	—	—	1.0	—	—	—	—
—	—	—	—	0.5	—	—	0.5	—
Ripple Rejection 28 Vdc ≤ $V_{in}$ ≤ 38 Vdc, $f = 120$ Hz	RR	—	54	—	—	54	—	dB
Dropout Voltage ( $I_O = 1.0$ A, $T_J = 25^\circ C$ )	$V_I - V_O$	—	2.0	—	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ C$ ) $10\text{ Hz} \leq f \leq 100\text{ kHz}$	$V_n$	—	10	—	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance $f = 1.0$ kHz	$r_O$	—	1.4	—	—	1.4	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ C$ ) $V_{in} = 35$ Vdc	$I_{SC}$	—	0.2	—	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ C$ )	$I_{max}$	—	2.2	—	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-2.0	—	—	-2.0	—	$\text{mV}/^\circ C$

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 33$  V,  $I_O = 1.0$  A,  $T_J = T_{low}$  to  $T_{high}$  [Note 1], unless otherwise noted.)


Characteristic	Symbol	MC7824AC			Unit
		Min	Typ	Max	
Output Voltage ( $T_J = 25^\circ\text{C}$ )	$V_O$	23.5	24	24.5	Vdc
Output Voltage ( $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ , $P_D \leq 15 \text{ W}$ ) $27.3 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$	$V_O$	23	24	25	Vdc
Line Regulation (Note 2) $27 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $30 \text{ Vdc} \leq V_{in} \leq 36 \text{ Vdc}$ $30 \text{ Vdc} \leq V_{in} \leq 36 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $26.7 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$	Regline	—	11.5	240	mV
Load Regulation (Note 2) $5.0 \text{ mA} \leq I_O \leq 1.5 \text{ A}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$ $250 \text{ mA} \leq I_O \leq 750 \text{ mA}$	Regload	—	2.1	100	mV
Quiescent Current $T_J = 25^\circ\text{C}$	$I_B$	—	—	6.0	mA
Quiescent Current Change	$\Delta I_B$	—	—	0.8	mA
$27.3 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ , $I_O = 500 \text{ mA}$ $27.3 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ , $T_J = 25^\circ\text{C}$ $5.0 \text{ mA} \leq I_O \leq 1.0 \text{ A}$	$\Delta I_B$	—	—	0.8	mA
Ripple Rejection $28 \text{ Vdc} \leq V_{in} \leq 38 \text{ Vdc}$ , $f = 120 \text{ Hz}$ , $I_O = 500 \text{ mA}$	RR	—	54	—	dB
Dropout Voltage ( $I_O = 1.0 \text{ A}$ , $T_J = 25^\circ\text{C}$ )	$V_I - V_O$	—	2.0	—	Vdc
Output Noise Voltage ( $T_A = 25^\circ\text{C}$ ) $10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	$V_n$	—	10	—	$\mu\text{V}/\text{V}_O$
Output Resistance ( $f = 1.0 \text{ kHz}$ )	$r_O$	—	1.4	—	$\text{m}\Omega$
Short Circuit Current Limit ( $T_A = 25^\circ\text{C}$ ) $V_{in} = 35 \text{ Vdc}$	$I_{SC}$	—	0.2	—	A
Peak Output Current ( $T_J = 25^\circ\text{C}$ )	$I_{max}$	—	2.2	—	A
Average Temperature Coefficient of Output Voltage	$TCV_O$	—	-2.0	—	$\text{mV}/^\circ\text{C}$

**NOTES:** 1.  $T_{low} = 0^{\circ}\text{C}$  for MC78XXAC, C  
 $= -40^{\circ}\text{C}$  for MC78XXB       $T_{high} = +125^{\circ}\text{C}$  for MC78XXAC, C, B


2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## MC7800 Series


**Figure 1. Peak Output Current as a Function of Input/Output Differential Voltage (MC78XXC, AC, B)**

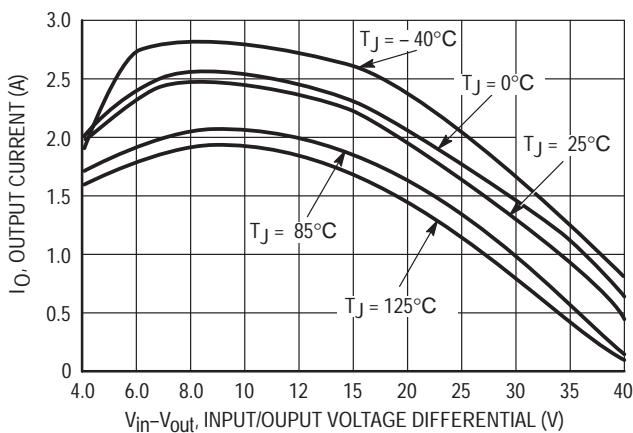


**Figure 2. Ripple Rejection as a Function of Output Voltages (MC78XXC, AC)**

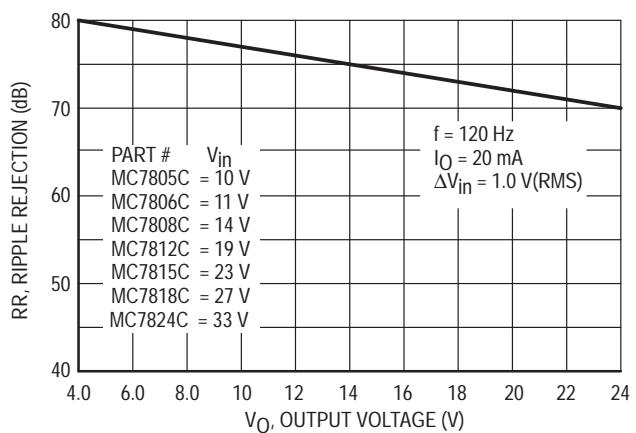


**Figure 3. Ripple Rejection as a Function of Frequency (MC78XXC, AC)**

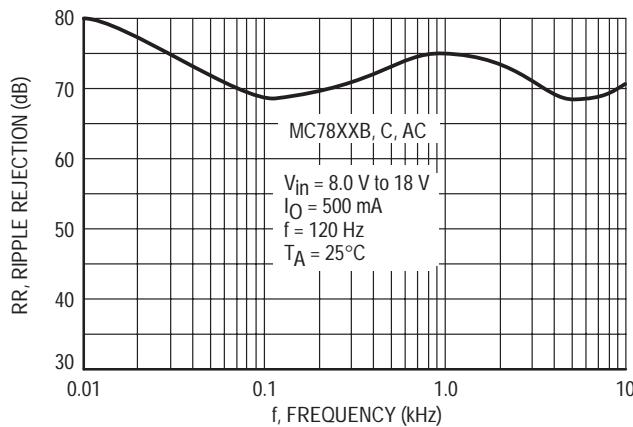


**Figure 4. Output Voltage as a Function of Junction Temperature (MC7805C, AC, B)**

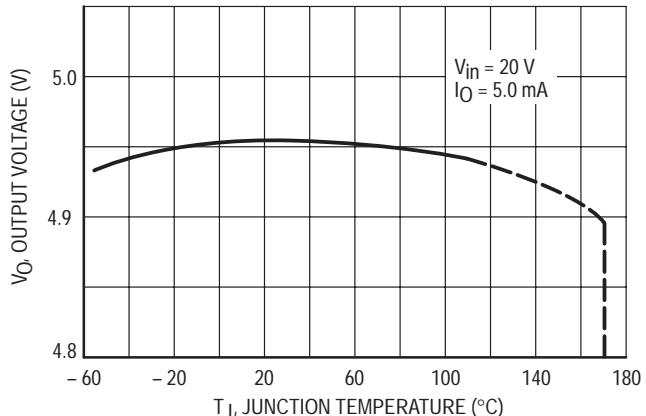

**Figure 5. Output Impedance as a Function of Output Voltage (MC78XXC, AC)**

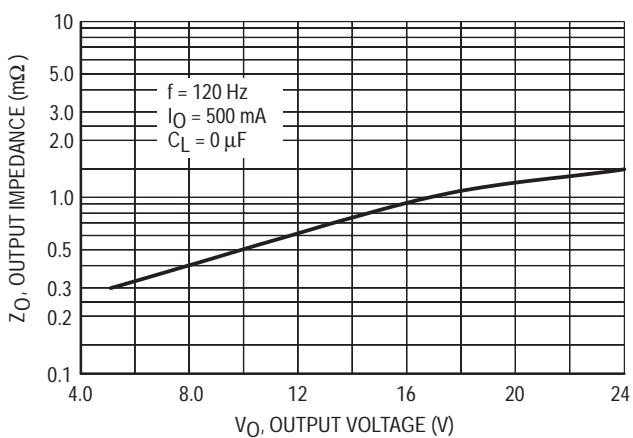

**Figure 6. Quiescent Current as a Function of Temperature (MC78XXC, AC, B)**

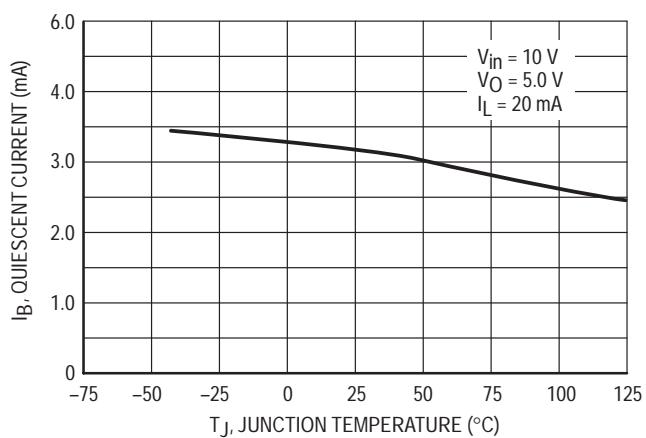

## MC7800 Series


## APPLICATIONS INFORMATION

## Design Considerations

The MC7800 Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition, Internal Short Circuit Protection that limits the maximum current the circuit will pass, and Output Transistor Safe-Area Compensation that reduces the output short circuit current as the voltage across the pass transistor is increased.

In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the regulator is connected to the power supply filter with long

**Figure 7. Current Regulator**

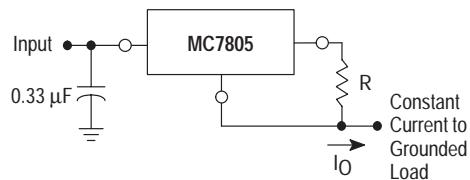

The MC7800 regulators can also be used as a current source when connected as above. In order to minimize dissipation the MC7805C is chosen in this application. Resistor R determines the current as follows:


$$I_0 = \frac{5.0\text{ V}}{R} + I_B$$

$I_B \approx 3.2$  mA over line and load changes.

For example, a 1.0 A current source would require  $R$  to be a  $5.0\ \Omega$ , 10 W resistor and the output voltage compliance would be the input voltage less 7.0 V.


wire lengths, or if the output load capacitance is large. An input bypass capacitor should be selected to provide good high-frequency characteristics to insure stable operation under all load conditions. A 0.33  $\mu$ F or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulators input terminals. Normally good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead.

**Figure 8. Adjustable Output Regulator**

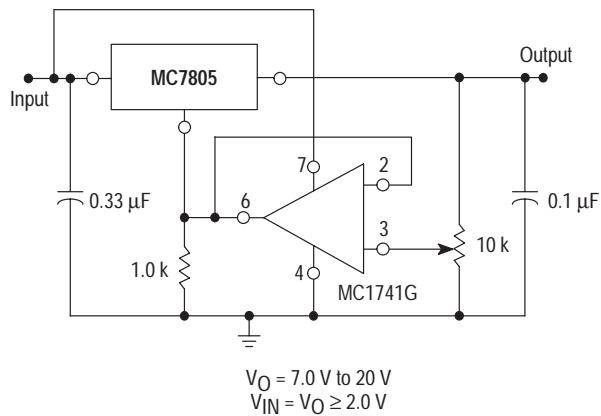

The addition of an operational amplifier allows adjustment to higher or intermediate values while retaining regulation characteristics. The minimum voltage obtainable with this arrangement is 2.0 V greater than the regulator voltage.


**Figure 9. Current Boost Regulator**

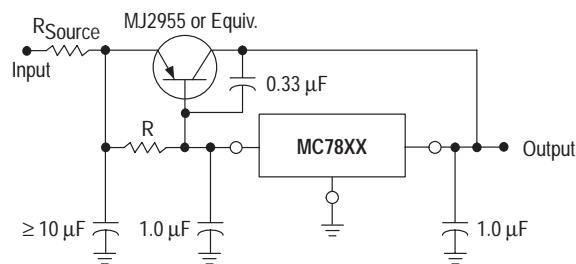

XX = 2 digits of type number indicating voltage.

The MC7800 series can be current boosted with a PNP transistor. The MJ2955 provides current to 5.0 A. Resistor R in conjunction with the  $V_{BE}$  of the PNP determines when the pass transistor begins conducting; this circuit is not short circuit proof. Input/output differential voltage minimum is increased by  $V_{BE}$  of the pass transistor.


**Figure 10. Short Circuit Protection**

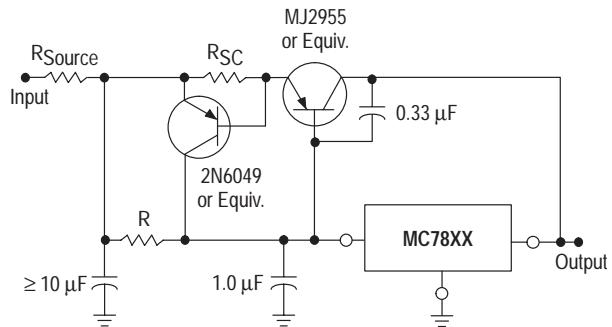


XX = 2 digits of type number indicating voltage.

The circuit of Figure 9 can be modified to provide supply protection against short circuits by adding a short circuit sense resistor,  $R_{SC}$ , and an additional PNP transistor. The current sensing PNP must be able to handle the short circuit current of the three-terminal regulator. Therefore, a four-ampere plastic power transistor is specified.


**Figure 11. Worst Case Power Dissipation versus Ambient Temperature (Case 221A)**

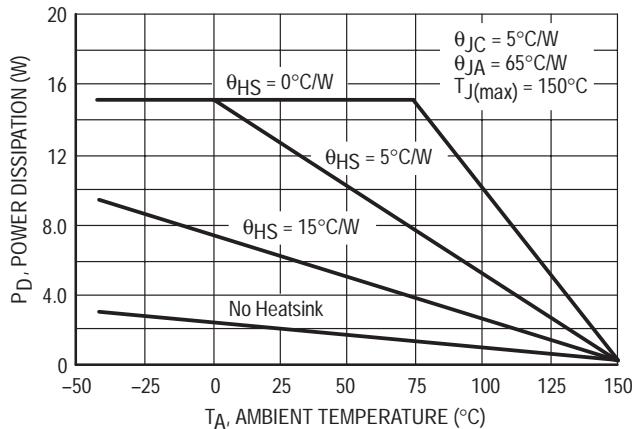

**Figure 12. Input Output Differential as a Function of Junction Temperature (MC78XXC, AC, B)**

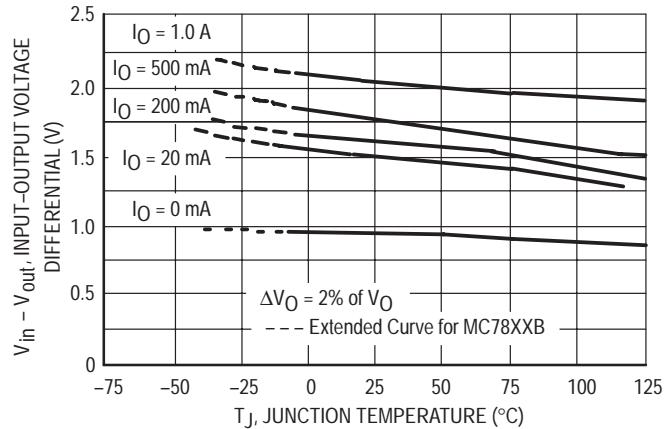

**Figure 13. D2PAK Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length**

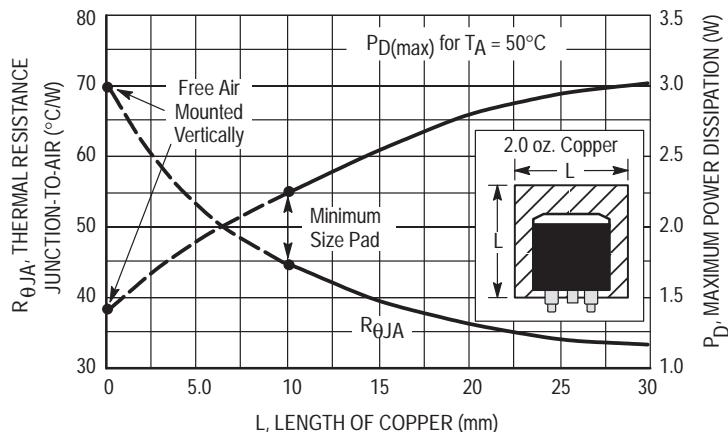

## DEFINITIONS

**Line Regulation** – The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

**Load Regulation** – The change in output voltage for a change in load current at constant chip temperature.

**Maximum Power Dissipation** – The maximum total device dissipation for which the regulator will operate within specifications.

**Quiescent Current** – That part of the input current that is not delivered to the load.

**Output Noise Voltage** – The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

**Long Term Stability** – Output voltage stability under accelerated life test conditions with the maximum rated voltage listed in the devices' electrical characteristics and maximum power dissipation.


# Tape and Reel Options

---

## In Brief . . .







Motorola offers the convenience of Tape and Reel packaging for our growing family of standard integrated circuit products. Reels are available to support the requirements of both first and second generation pick-and-place equipment. The packaging fully conforms to the latest EIA-481A specification. The antistatic embossed tape provides a secure cavity, sealed with a peel-back cover tape.

	Page
Tape and Reel Configurations .....	12-2
Tape and Reel Information Table .....	12-4
Analog MPQ Table .....	12-5




## Tape and Reel Configurations

### Mechanical Polarization

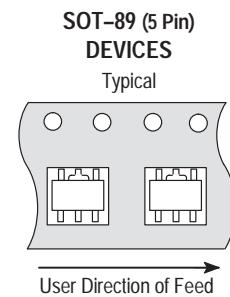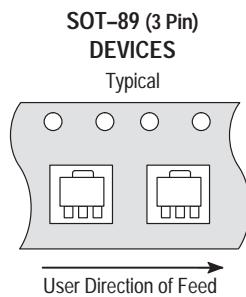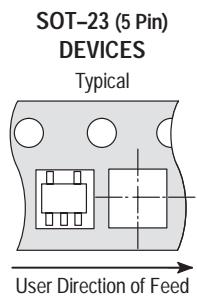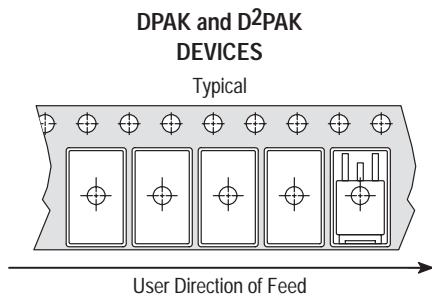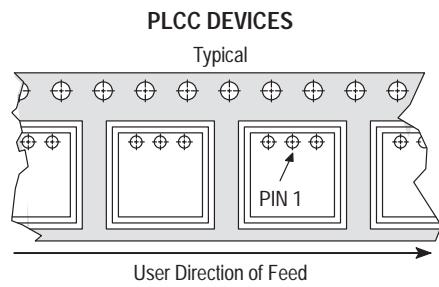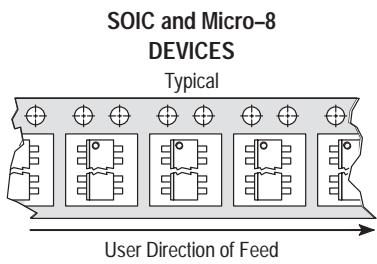


## Tape and Reel Configurations (continued)

### TO-92 Reel Styles

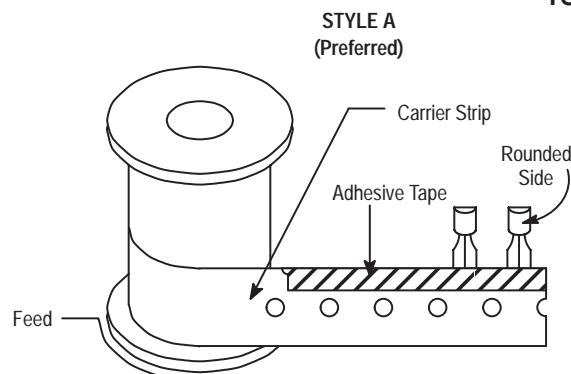


Rounded side of transistor and adhesive tape visible.

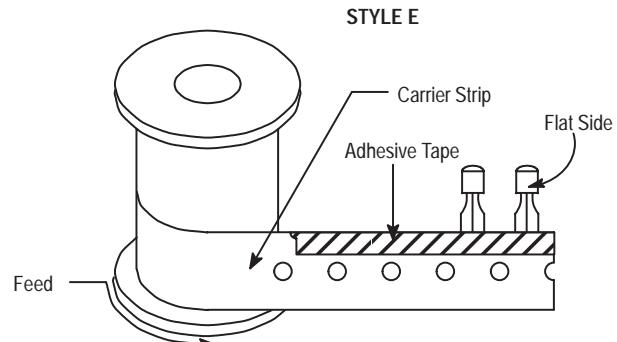


Flat side of transistor and adhesive tape visible.

### TO-92 Ammo Pack Styles


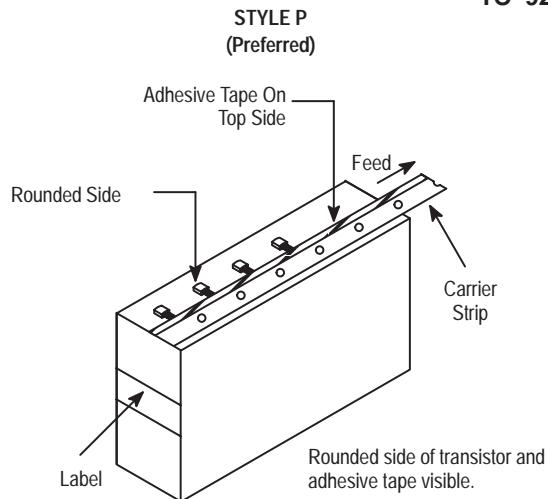


Style P ammo pack is equivalent to Styles A and B of reel pack dependent on feed orientation from box.

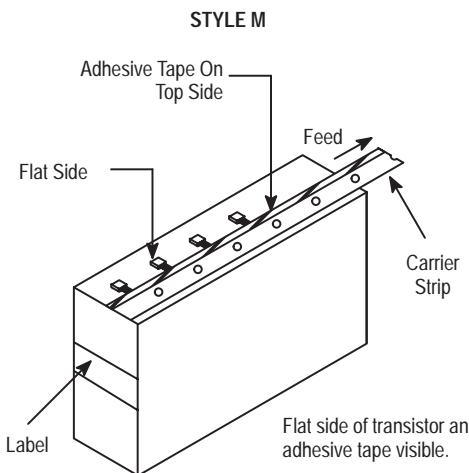

Style M ammo pack is equivalent to Style E of reel pack dependent on feed orientation from box.

### TO-92 EIA Radial Tape in Fan Fold Box or On Reel

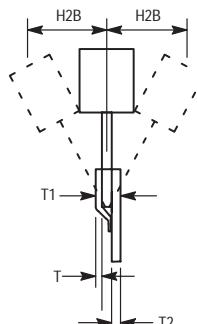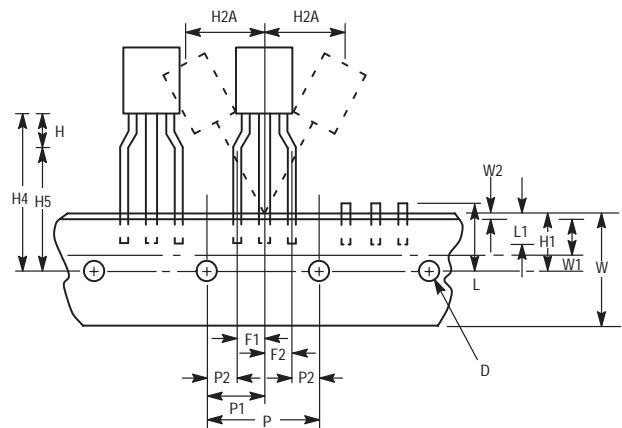

# Tape and Reel Information Table

Package	Tape Width (mm)	Devices <sup>(1)</sup> per Reel	Reel Size (inch)	Device Suffix
SO-8, SOP-8	12	2,500	13	R2
SO-14	16	2,500	13	R2
SO-16	16	2,500	13	R2
SO-16L, SO-8+8L WIDE	16	1,000	13	R2
SO-20L WIDE	24	1,000	13	R2
SO-24L WIDE	24	1,000	13	R2
SO-28L WIDE	24	1,000	13	R2
SO-28L WIDE	32	1,000	13	R3
Micro-8	12	2,500	13	R2
PLCC-20	16	1,000	13	R2
PLCC-28	24	500	13	R2
PLCC-44	32	500	13	R2
PLCC-52	32	500	13	R2
PLCC-68	44	250	13	R2
PLCC-84	44	250	13	R2
TO-226AA (TO-92) <sup>(2)</sup>	18	2,000	13	RA, RE, RP, or RM (Ammo Pack) only
DPAK	16	2,500	13	RK
D <sup>2</sup> PAK	24	800	13	R4
SOT-23 (5 Pin)	8	3,000	7	TR
SOT-89 (3/5 Pin)	12	1,000	7	T1

(1) Minimum order quantity is 1 reel. Distributors/OEM customers may break lots or reels at their option, however broken reels may not be returned.

(2) Integrated circuits in TO-226AA packages are available in Styles A and E only, with optional "Ammo Pack" (Suffix RP or RM). The RA and RP configurations are preferred. For ordering information please contact your local Motorola Semiconductor Sales Office.

# Analog MPQ Table

## Tape/Reel and Ammo Pack

Package Type	Package Code	MPQ
<b>PLCC</b>		
Case 775	0802	1000/reel
Case 776	0804	500/reel
Case 777	0801	500/reel
<b>SOIC</b>		
Case 751	0095	2500/reel
Case 751A	0096	2500/reel
Case 751B	0097	2500/reel
Case 751G	2003	1000/reel
Case 751D	2005	1000/reel
Case 751E	2008	1000/reel
Case 751F	2009	1000/reel
<b>Micro-8</b>		
Case 846A	-	2500/reel
<b>TO-92</b>		
Case 29	0031	2000/reel
Case 29	0031	2000/Ammo Pack
<b>DPAK</b>		
Case 369A	-	2500/reel
<b>D<sup>2</sup>PAK</b>		
Case 936	-	800/reel
<b>SOT-23 (5 Pin)</b>		
Case 1212	-	3000/reel
<b>SOT-89 (3 Pin)</b>		
Case 1213	-	1000/reel
<b>SOT-89 (5 Pin)</b>		
Case 1214	-	1000/reel



# Packaging Information

---

## In Brief . . .

The packaging availability for each device type is indicated on the individual data sheets and the Selector Guide. All of the outline dimensions for the packages are given in this section.

The maximum power consumption an integrated circuit can tolerate at a given operating ambient temperature can be found from the equation:

$$P_{D(TA)} = \frac{T_{J(max)} - T_A}{R_{\theta JA}(\text{Typ})}$$

where:

$P_{D(TA)}$  = Power Dissipation allowable at a given operating ambient temperature. This must be greater than the sum of the products of the supply voltages and supply currents at the worst case operating condition.

$T_{J(max)}$  = Maximum operating Junction Temperature as listed in the Maximum Ratings Section. See individual data sheets for  $T_{J(max)}$  information.



$T_A$  = Maximum desired operating Ambient Temperature

$R_{\theta JA}(\text{Typ})$  = Typical Thermal Resistance Junction-to-Ambient

# Case Outline Dimensions

**LP, P, Z SUFFIX  
CASE 29-04**

Plastic Package  
(TO-226AA/TO-92)  
ISSUE AD

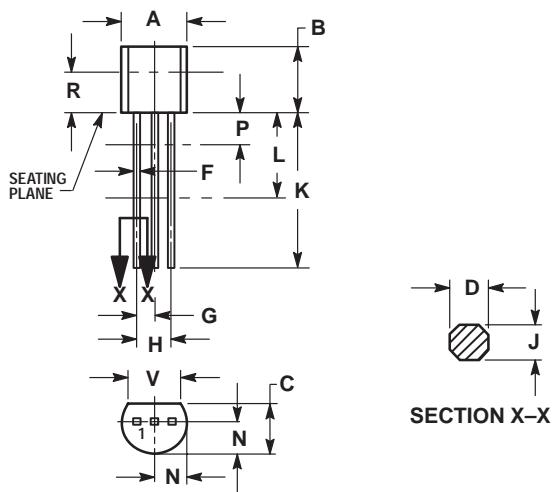



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

**KC, T SUFFIX  
CASE 221A-06**

Plastic Package  
ISSUE Y

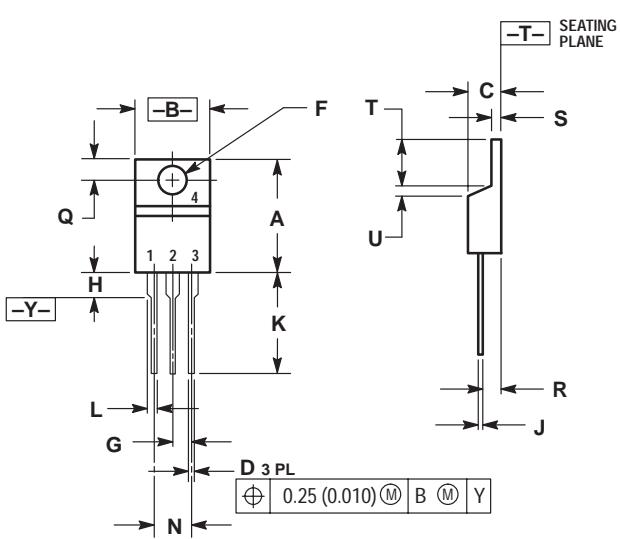



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.560	0.625	14.23	15.87
B	0.380	0.420	9.66	10.66
C	0.140	0.190	3.56	4.82
D	0.020	0.045	0.51	1.14
F	0.139	0.155	3.53	3.93
G	0.100 BSC	—	2.54 BSC	—
H	—	0.280	—	7.11
J	0.012	0.045	0.31	1.14
K	0.500	0.580	12.70	14.73
L	0.045	0.070	1.15	1.77
N	0.200 BSC	—	5.08 BSC	—
Q	0.100	0.135	2.54	3.42
R	0.080	0.115	2.04	2.92
S	0.020	0.055	0.51	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27



**TH SUFFIX**  
**CASE 314A-03**  
 Plastic Package  
 ISSUE D

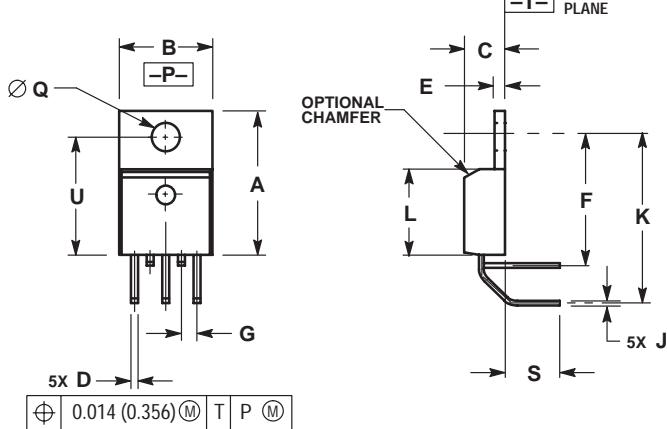

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 0.043 (1.092) MAXIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.572	0.613	14.529	15.570
B	0.390	0.415	9.906	10.541
C	0.170	0.180	4.318	4.572
D	0.025	0.038	0.635	0.965
E	0.048	0.055	1.219	1.397
F	0.570	0.585	14.478	14.859
G	0.067 BSC		1.702 BSC	
J	0.015	0.025	0.381	0.635
K	0.730	0.745	18.542	18.923
L	0.320	0.365	8.128	9.271
Q	0.140	0.153	3.556	3.886
S	0.210	0.260	5.334	6.604
U	0.468	0.505	11.888	12.827



**T, TV SUFFIX**  
**CASE 314B-05**  
 Plastic Package  
 ISSUE J

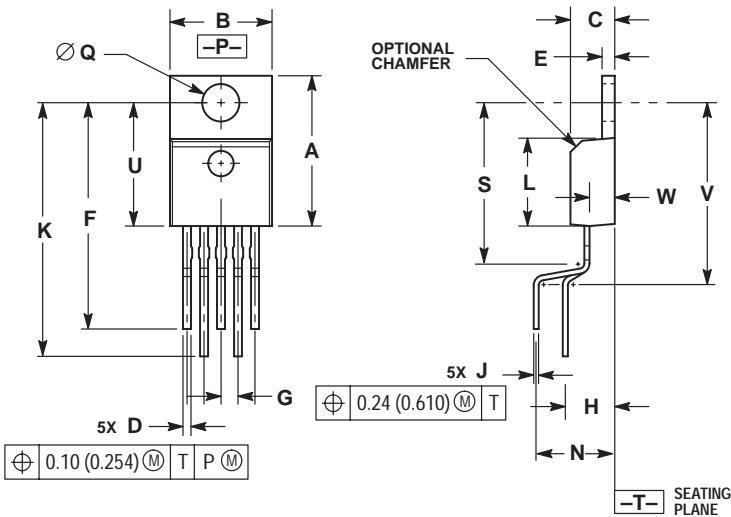

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 0.043 (1.092) MAXIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.572	0.613	14.529	15.570
B	0.390	0.415	9.906	10.541
C	0.170	0.180	4.318	4.572
D	0.025	0.038	0.635	0.965
E	0.048	0.055	1.219	1.397
F	0.850	0.935	21.590	23.749
G	0.067 BSC		1.702 BSC	
H	0.166 BSC		4.216 BSC	
J	0.015	0.025	0.381	0.635
K	0.900	1.100	22.860	27.940
L	0.320	0.365	8.128	9.271
N	0.320 BSC		8.128 BSC	
Q	0.140	0.153	3.556	3.886
S	—	0.620	—	15.748
U	0.468	0.505	11.888	12.827
V	—	0.735	—	18.669
W	0.090	0.110	2.286	2.794



**T SUFFIX**  
**CASE 314C-01**  
 Plastic Package  
 ISSUE A

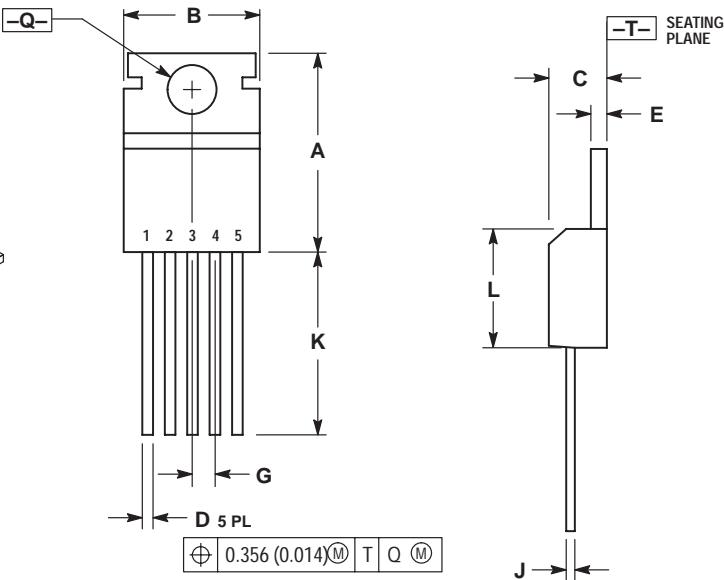

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 10.92 (0.043) MAXIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.610	0.625	15.59	15.88
B	0.380	0.420	9.65	10.67
C	0.160	0.190	4.06	4.83
D	0.020	0.040	0.51	1.02
E	0.035	0.055	0.89	1.40
G	0.067 BSC		1.702 BSC	
J	0.015	0.025	0.38	0.64
K	0.500	—	12.70	—
L	0.355	0.370	9.02	9.40
Q	0.139	0.147	3.53	3.73



**T, T1 SUFFIX  
CASE 314D-03**  
Plastic Package  
ISSUE D

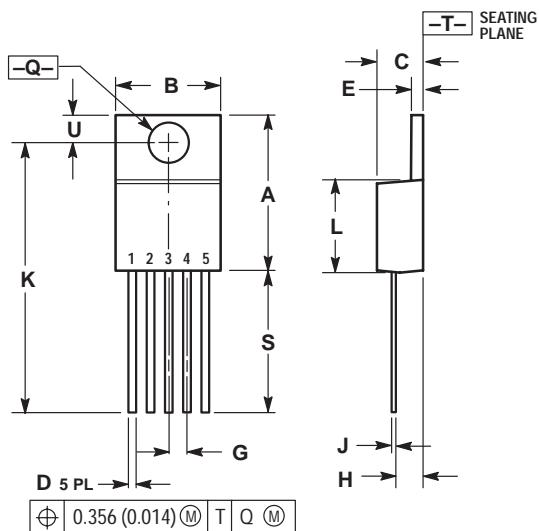

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 10.92 (0.043) MAXIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.572	0.613	14.529	15.570
B	0.390	0.415	9.906	10.541
C	0.170	0.180	4.318	4.572
D	0.025	0.038	0.635	0.965
E	0.048	0.055	1.219	1.397
G	0.067 BSC		1.702 BSC	
H	0.087	0.112	2.210	2.845
J	0.015	0.025	0.381	0.635
K	1.020	1.065	25.908	27.051
L	0.320	0.365	8.128	9.271
Q	0.140	0.153	3.556	3.886
U	0.105	0.117	2.667	2.972
S	0.543	0.582	13.792	14.783



**DT-1 SUFFIX  
CASE 369-07**  
Plastic Package  
(DPAK)  
ISSUE K

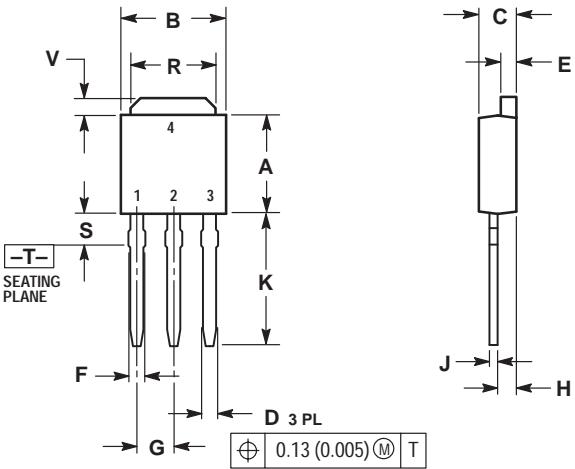

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.235	0.250	5.97	6.35
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.033	0.040	0.84	1.01
F	0.037	0.047	0.94	1.19
G	0.090 BSC		2.29 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.350	0.380	8.89	9.65
R	0.175	0.215	4.45	5.46
S	0.050	0.090	1.27	2.28
V	0.030	0.050	0.77	1.27

**DT SUFFIX  
CASE 369A-13**  
Plastic Package  
(DPAK)  
ISSUE Y

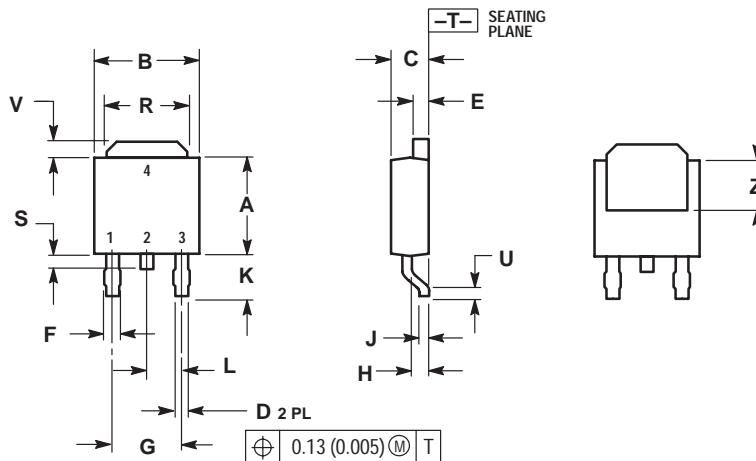



NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.235	0.250	5.97	6.35
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.033	0.040	0.84	1.01
F	0.037	0.047	0.94	1.19
G	0.180 BSC		4.58 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.102	0.114	2.60	2.89
L	0.090 BSC		2.29 BSC	
R	0.175	0.215	4.45	5.46
S	0.020	0.050	0.51	1.27
U	0.020	---	0.51	---
V	0.030	0.050	0.77	1.27
Z	0.138	---	3.51	---

**DP1, N, P, P1 SUFFIX****CASE 626-05**

Plastic Package

ISSUE K

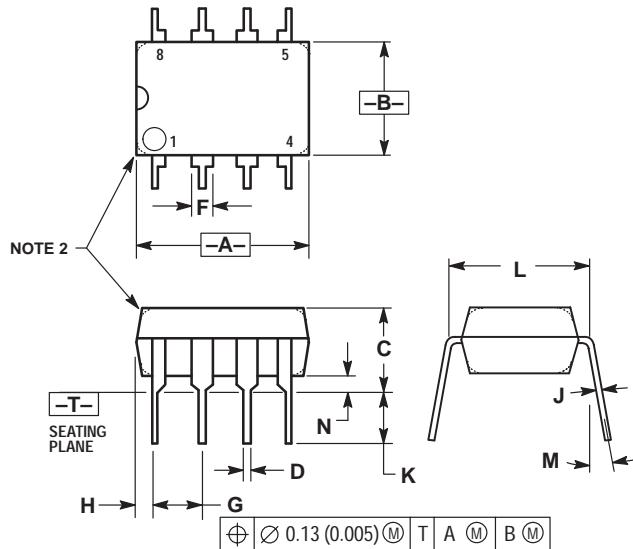



## NOTES:

1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

**N, P, N-14, P2 SUFFIX****CASE 646-06**

Plastic Package

ISSUE L

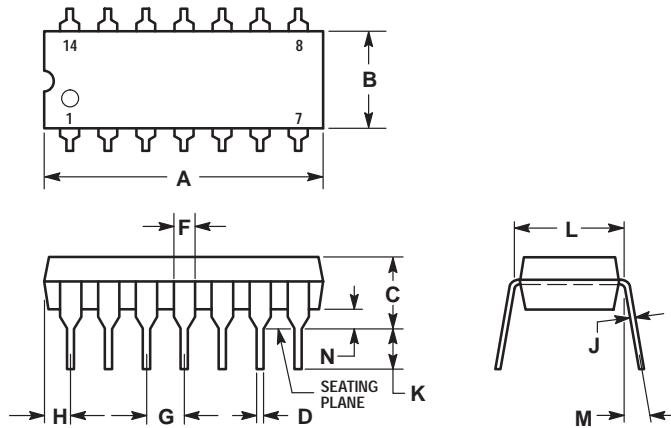



## NOTES:

1. LEADS WITHIN 0.13 (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
4. ROUNDED CORNERS OPTIONAL.

**DP2, N, P, PC SUFFIX****CASE 648-08**

Plastic Package

ISSUE R

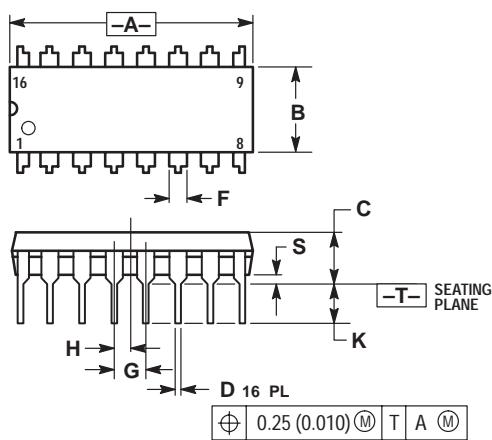

## NOTES:



1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

**B, P, P2, V SUFFIX****CASE 648C-03**

Plastic Package

(DIP-16)



ISSUE C

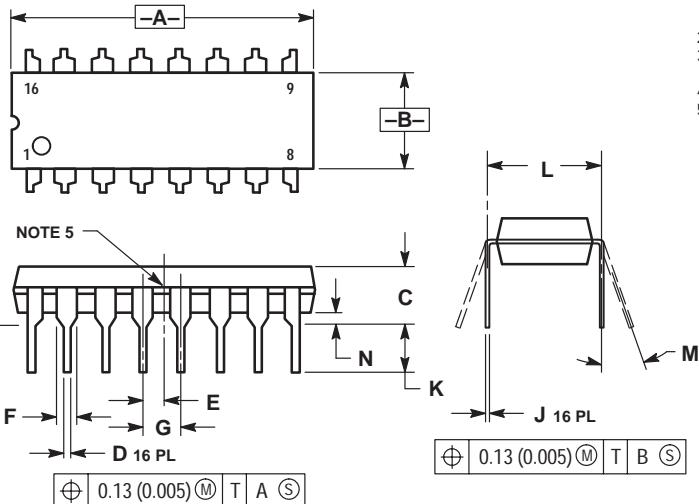**P SUFFIX****CASE 648E-01**

Plastic Package



(DIP-16)

ISSUE O

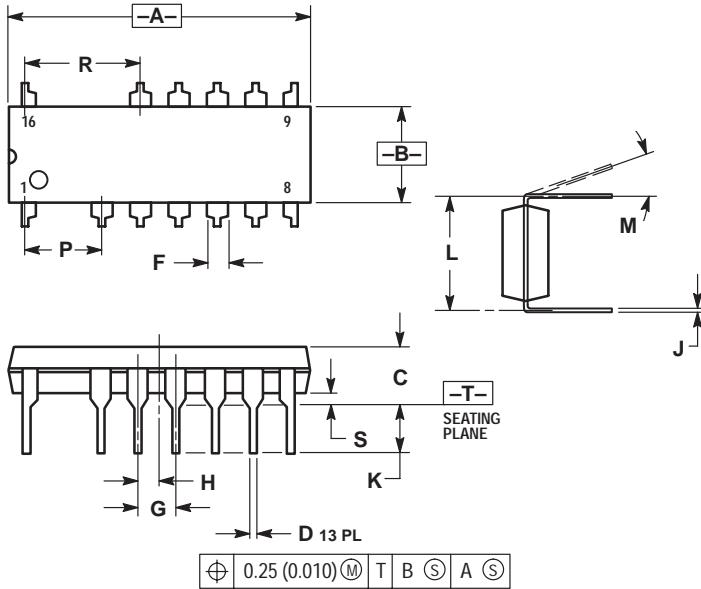**P SUFFIX****CASE 649-03**

Plastic Package



ISSUE D

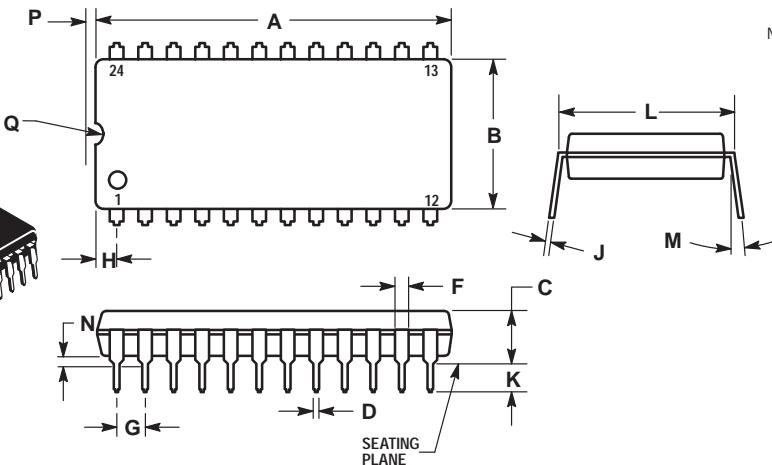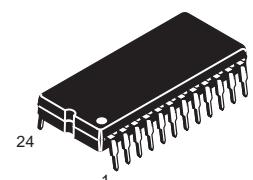

**A, B, N, P SUFFIX****CASE 707-02**

Plastic Package

ISSUE C

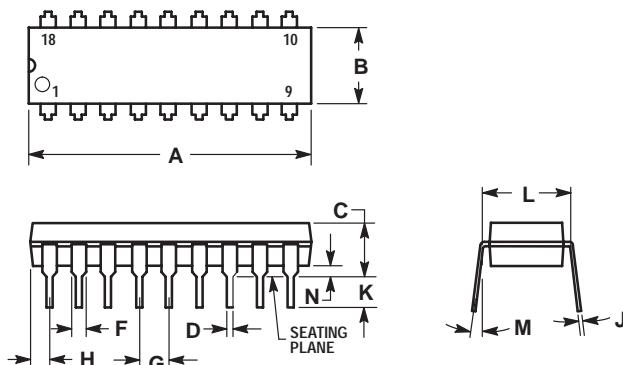

## NOTES:



1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	22.22	23.24	0.875	0.915
B	6.10	6.60	0.240	0.260
C	3.56	4.57	0.140	0.180
D	0.36	0.56	0.014	0.022
F	1.27	1.78	0.050	0.070
G	2.54 BSC		0.100 BSC	
H	1.02	1.52	0.040	0.060
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

**P SUFFIX****CASE 710-02**

Plastic Package

ISSUE B

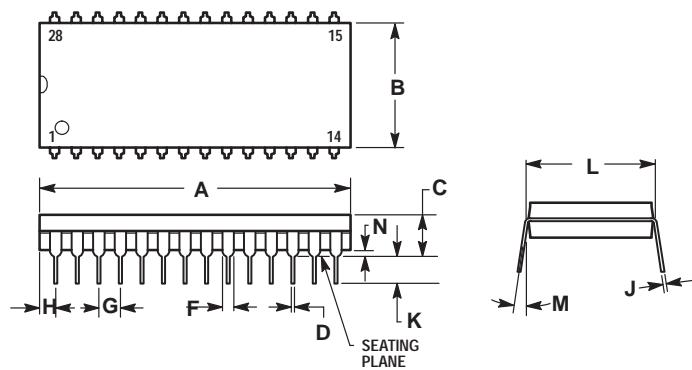

## NOTES:



1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	36.45	37.21	1.435	1.465
B	13.72	14.22	0.540	0.560
C	3.94	5.08	0.155	0.200
D	0.36	0.56	0.014	0.022
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.16	0.065	0.085
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	15.24 BSC		0.600 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

**P SUFFIX****CASE 711-03**

Plastic Package

ISSUE C

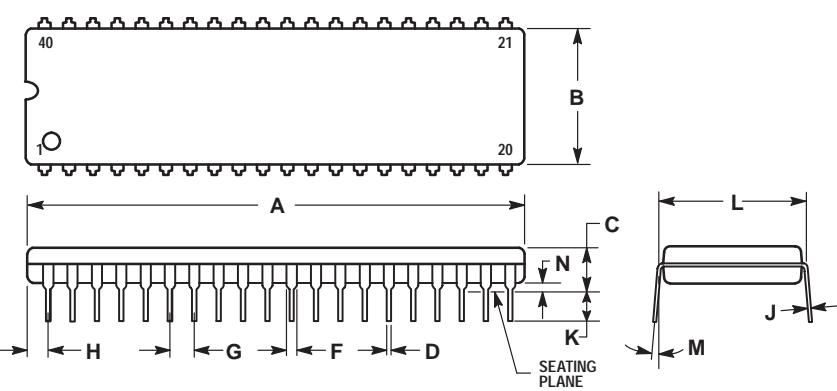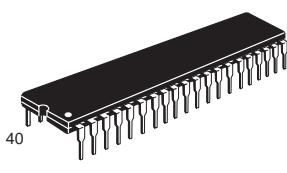



## NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	51.69	52.45	2.035	2.065
B	13.72	14.22	0.540	0.560
C	3.94	5.08	0.155	0.200
D	0.36	0.56	0.014	0.022
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.16	0.065	0.085
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	15.24 BSC		0.600 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

**F, P, P-3 SUFFIX****CASE 724-03**


Plastic Package  
(NDIP-24)  
ISSUE D

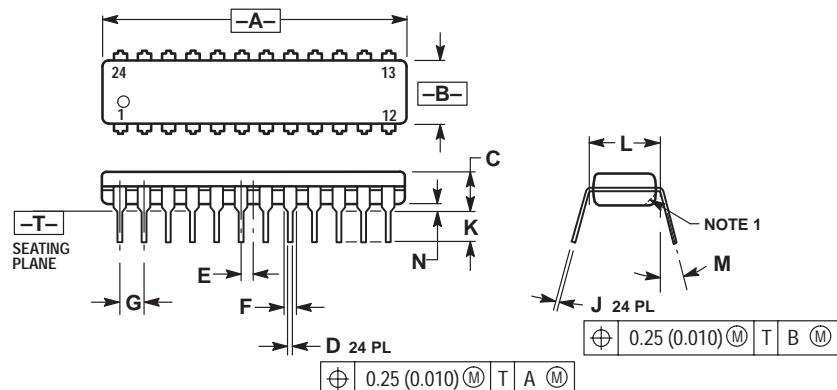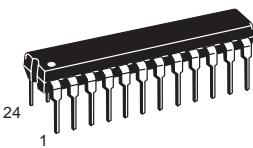**H, P, DP SUFFIX****CASE 738-03**


Plastic Package  
ISSUE E

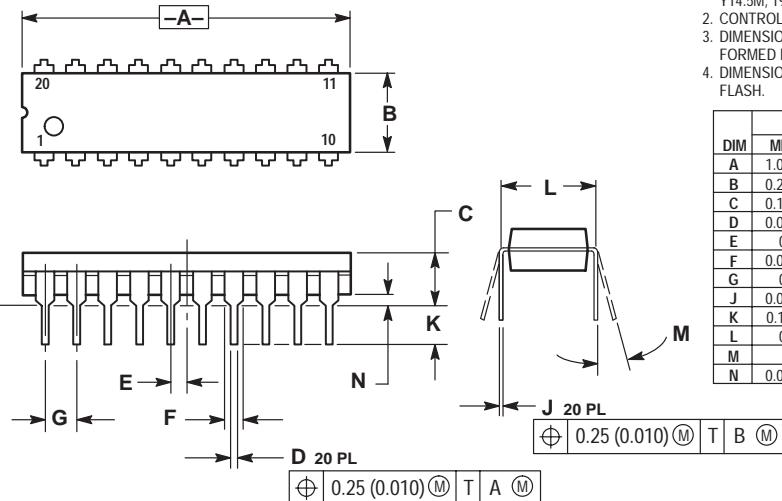**D, D1, D2 SUFFIX****CASE 751-05**

Plastic Package  
(SO-8, SOP-8)  
ISSUE R

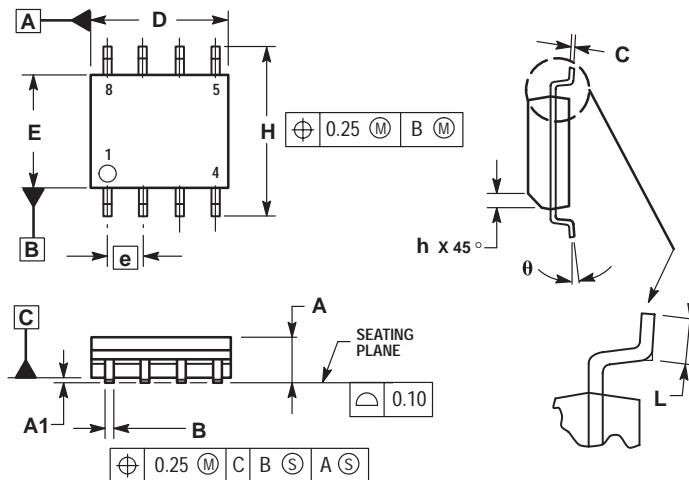

**D SUFFIX**  
**CASE 751A-03**  
 Plastic Package  
 (SO-14)  
 ISSUE F

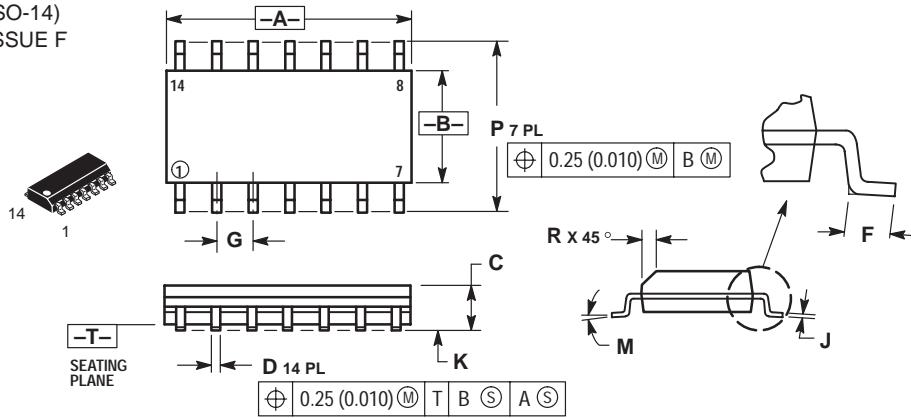


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.55	8.75	0.337	0.344
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0 °	7 °	0 °	7 °
P	5.80	6.20	0.228	0.244
R	0.25	0.50	0.010	0.019

**D SUFFIX**  
**CASE 751B-05**  
 Plastic Package  
 (SO-16)  
 ISSUE J

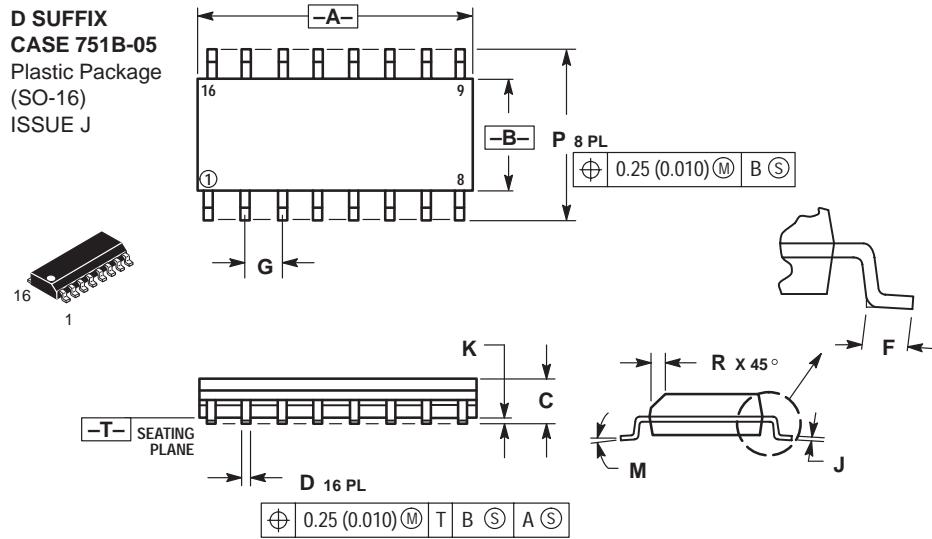


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.80	10.00	0.386	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0 °	7 °	0 °	7 °
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

**DW, FP SUFFIX**  
**CASE 751D-04**  
 Plastic Package  
 (SO-20L, SO-20)  
 ISSUE E




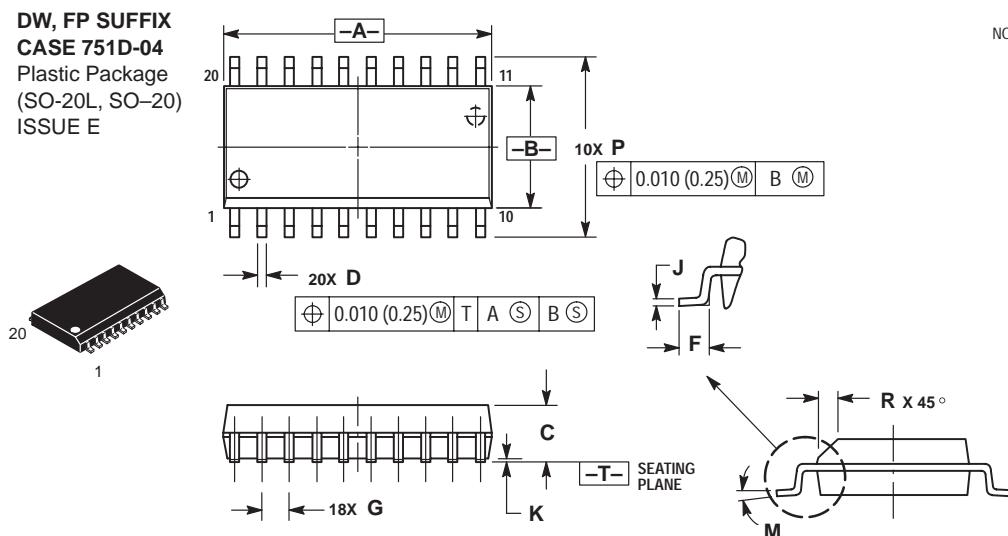


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.150 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	12.65	12.95	0.499	0.510
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0 °	7 °	0 °	7 °
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029




**DW SUFFIX**  
**CASE 751E-04**  
 Plastic Package  
 (SO-24L,  
 SOP (16+4+4)L)  
 ISSUE E

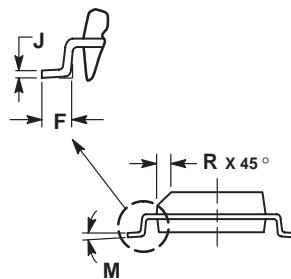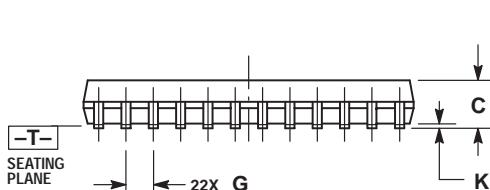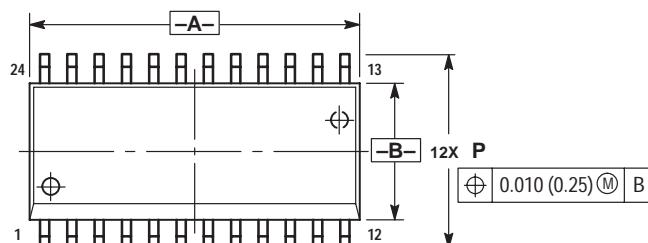

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: MILLIMETER.  
 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.  
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.  
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	15.25	15.54	0.601	0.612
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.41	0.90	0.016	0.035
G	1.27 BSC		0.050 BSC	
J	0.23	0.32	0.009	0.013
K	0.13	0.29	0.005	0.011
M	0°	8°	0°	8°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029




**DW SUFFIX**  
**CASE 751F-04**  
 Plastic Package  
 (SO-28L, SOIC-28)  
 ISSUE E

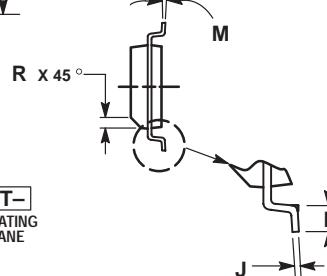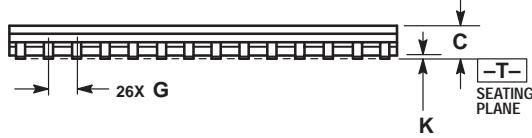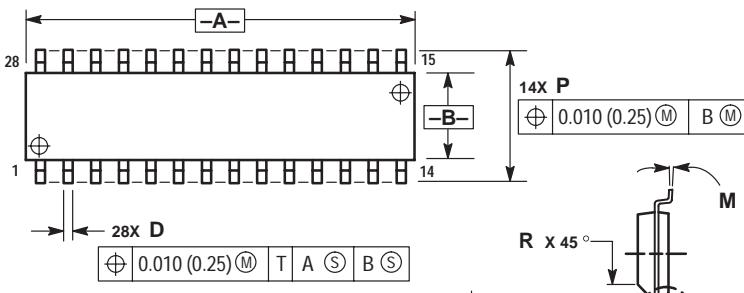

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: MILLIMETER.  
 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.  
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.  
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	17.80	18.05	0.701	0.711
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.41	0.90	0.016	0.035
G	1.27 BSC		0.050 BSC	
J	0.23	0.32	0.009	0.013
K	0.13	0.29	0.005	0.011
M	0°	8°	0°	8°
P	10.01	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

**DW SUFFIX**  
**CASE 751G-02**  
 Plastic Package  
 (SO-16L, SOP-16L,  
 SOP-8+8L)  
 ISSUE A

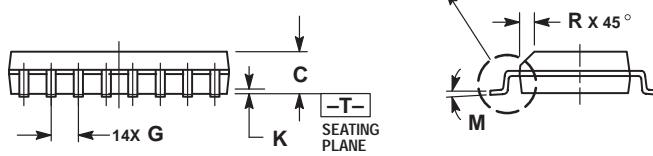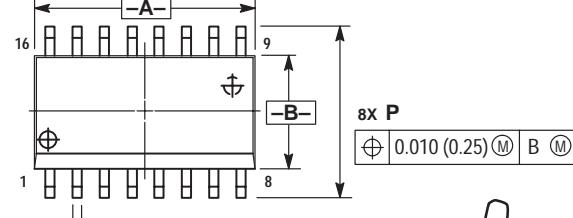

NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: MILLIMETER.  
 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.  
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.  
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.15	10.45	0.400	0.411
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

**D SUFFIX****CASE 751K-01**

Plastic Package

(SO-16)

ISSUE O

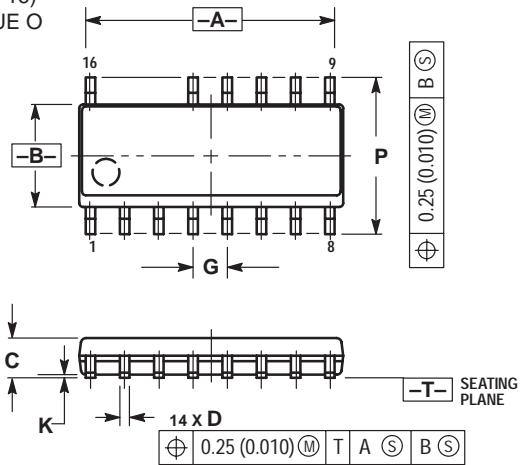

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.80	10.00	0.388	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

**DW SUFFIX****CASE 751N-01**

Plastic Package

(SOP-16L)

ISSUE O


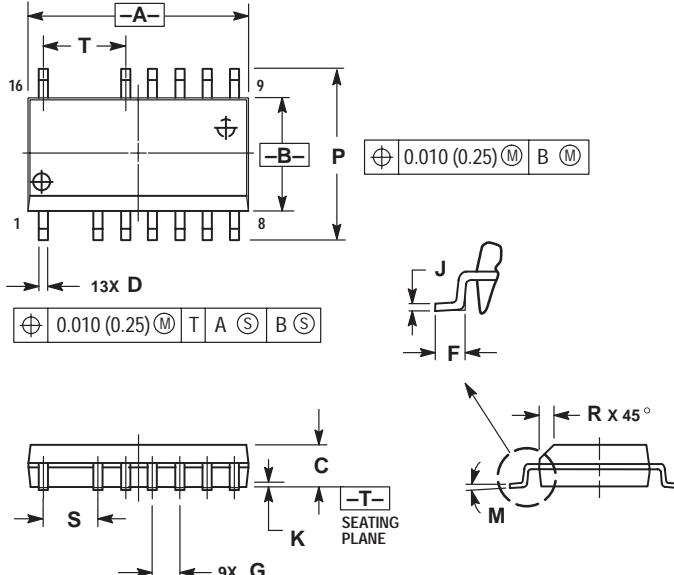


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.15	10.45	0.400	0.411
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029
S	2.54 BSC		0.100 BSC	
T	3.81 BSC		0.150 BSC	

**CASE 762-01**

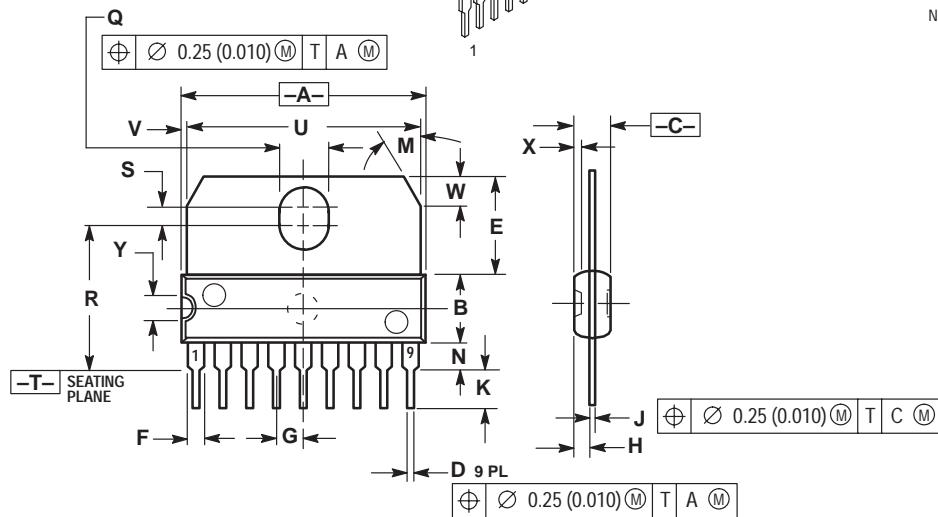
 Plastic Medium Power Package  
 (SIP-9)  
 ISSUE C


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	22.40	23.00	0.873	0.897
B	6.40	6.60	0.252	0.260
C	3.45	3.65	0.135	0.143
D	0.40	0.55	0.015	0.021
E	9.35	9.60	0.368	0.377
F	1.40	1.60	0.055	0.062
G	2.54 BSC		0.100 BSC	
H	1.51	1.71	0.059	0.067
J	0.360	0.400	0.014	0.015
K	3.95	4.20	0.155	0.165
L	30 °BSC		30 °BSC	
N	2.50	2.70	0.099	0.106
Q	3.15	3.45	0.124	0.135
R	13.60	13.90	0.535	0.547
S	1.65	1.95	0.064	0.076
U	22.00	22.20	0.866	0.874
V	0.55	0.75	0.021	0.029
W	2.89 BSC		0.113 BSC	
X	0.65	0.75	0.025	0.029
Y	2.70	2.80	0.106	0.110

**FN SUFFIX**
**CASE 775-02**

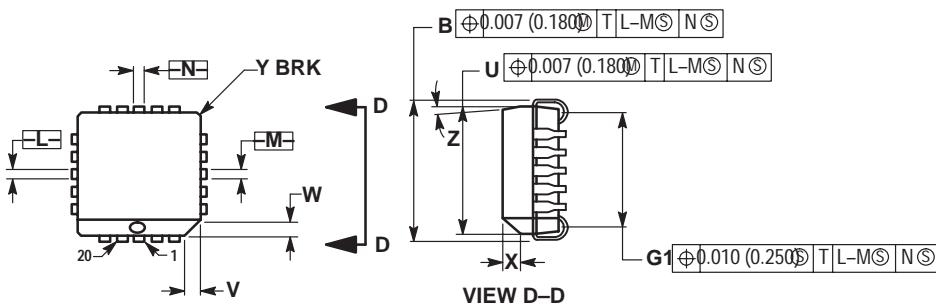 Plastic Package  
 (PLCC-20)  
 ISSUE C


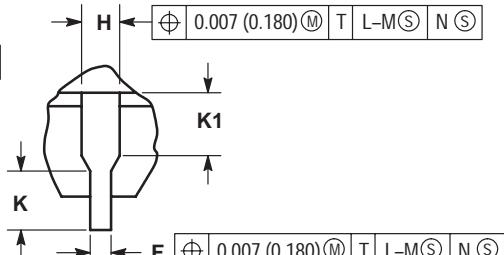
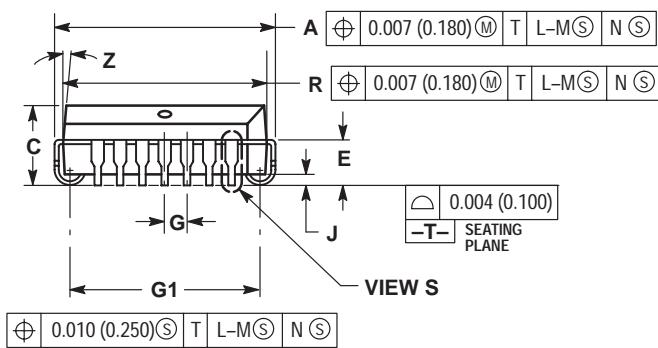
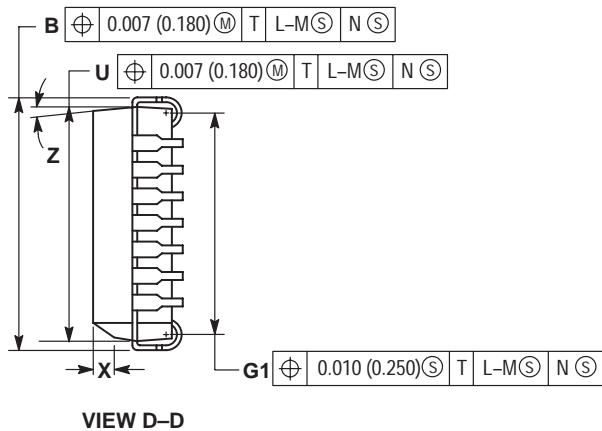
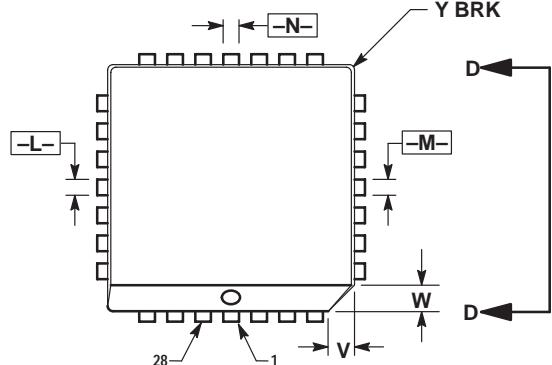

## NOTES:

1. DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.
5. CONTROLLING DIMENSION: INCH.
6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

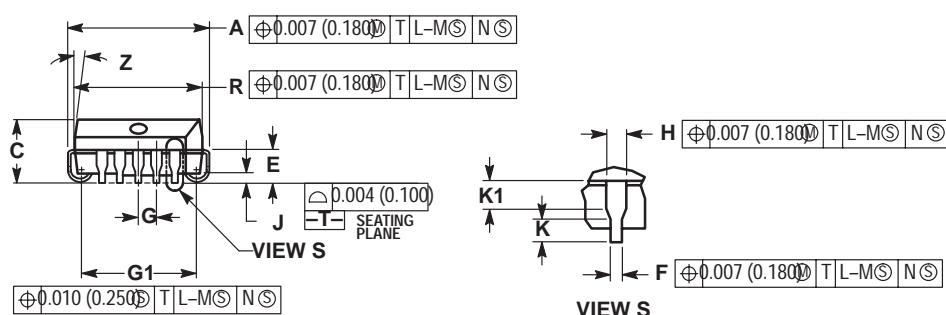

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.385	0.395	9.78	10.03
B	0.385	0.395	9.78	10.03
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2 °	10 °	2 °	10 °
G1	0.310	0.330	7.88	8.38
K1	0.040	—	1.02	—

**FN SUFFIX**  
**CASE 776-02**  
Plastic Package  
(PLCC-28)  
ISSUE D





NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.485	0.495	12.32	12.57
B	0.485	0.495	12.32	12.57
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050	BSC	1.27	BSC
H	0.026	0.032	0.66	0.81
J	0.020	---	0.51	---
K	0.025	---	0.64	---
R	0.450	0.456	11.43	11.58
U	0.450	0.456	11.43	11.58
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	---	0.020	---	0.50
Z	2°	10°	2°	10°
G1	0.410	0.430	10.42	10.92
K1	0.040	---	1.02	---

**FN SUFFIX**  
**CASE 777-02**  
Plastic Package  
(PLCC)  
ISSUE C

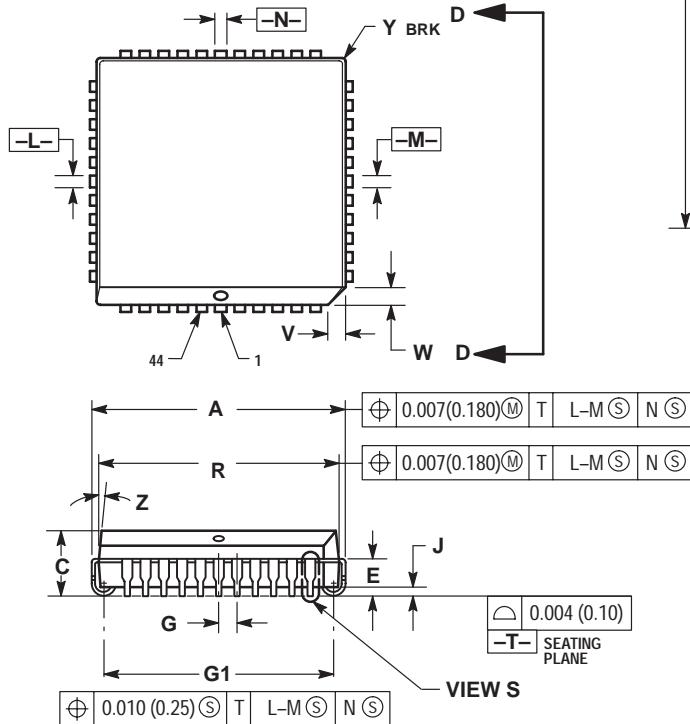




NOTES:

- DATUMS -L-, -M-, AND -N- ARE DETERMINED WHERE TOP OF LEAD SHOULDER EXISTS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.25) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.

- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.685	0.695	17.40	17.65
B	0.685	0.695	17.40	17.65
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050	BSC	1.27	BSC
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.650	0.656	16.51	16.66
U	0.650	0.656	16.51	16.66
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.610	0.630	15.50	16.00
K1	0.040	—	1.02	—

**M SUFFIX**  
**CASE 803C**  
PRELIMINARY  
Plastic Package

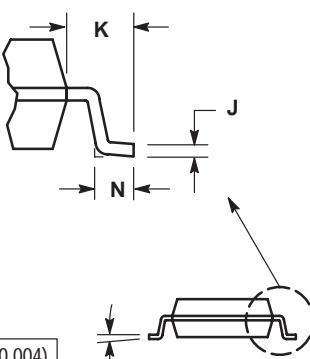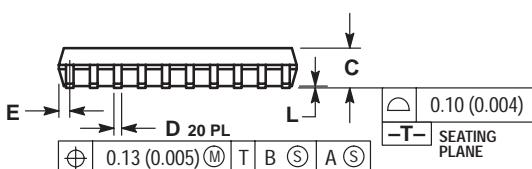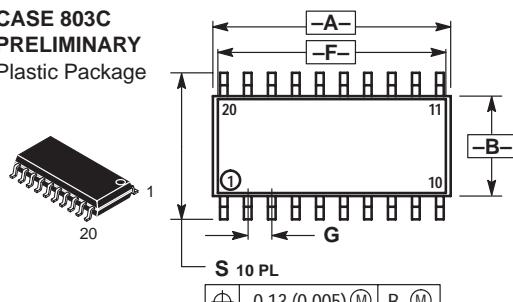


- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: MILLIMETER.
  - DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  - MAXIMUM MOLD PROTRUSION 0.15 (0.008) PER SIDE.
  - DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.006) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	12.35	12.80	0.486	0.504
B	5.10	5.45	0.201	0.215
C	1.95	2.05	0.077	0.081
D	0.35	0.50	0.014	0.020
E	—	0.81	—	0.032
F	12.40*	—	0.488*	—
G	1.15	1.39	0.045	0.055
H	0.59	0.81	0.023	0.032
I	0.18	0.27	0.007	0.011
K	1.10	1.50	0.043	0.059
L	0.05	0.20	0.001	0.008
M	0.50	0.85	0.020	0.033
N	7.40	8.20	0.291	0.323

\*APPROXIMATE

**TV SUFFIX**  
**CASE 821C-04**  
 Plastic Package  
 (15-Pin ZIP)  
 ISSUE D




15

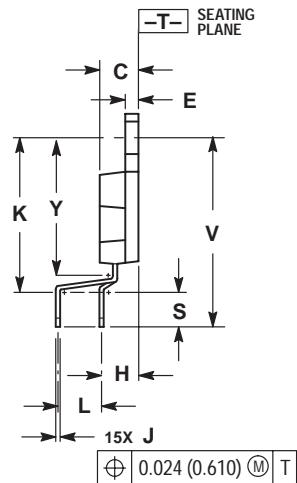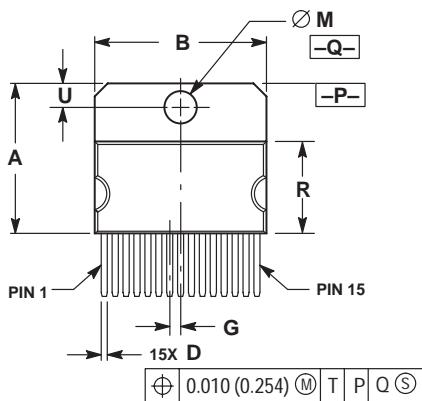



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION R DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
  4. DIMENSION D DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
  5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 (0.250).
  6. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION, AT MAXIMUM MATERIAL CONDITION.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.684	0.694	17.374	17.627
B	0.784	0.792	19.914	20.116
C	0.173	0.181	4.395	4.597
D	0.024	0.031	0.610	0.787
E	0.058	0.062	1.473	1.574
G	0.050 BSC		1.270 BSC	
H	0.169 BSC		4.293 BSC	
J	0.018	0.024	0.458	0.609
K	0.700	0.710	17.780	18.034
L	0.200 BSC		5.080 BSC	
M	0.148	0.151	3.760	3.835
R	0.416	0.426	10.567	10.820
S	0.157	0.167	3.988	4.242
U	0.105	0.115	2.667	2.921
V	0.868 REF		22.047 REF	
Y	0.625	0.639	15.875	16.231

**T SUFFIX**  
**CASE 821D-03**  
 Plastic Package  
 ISSUE C

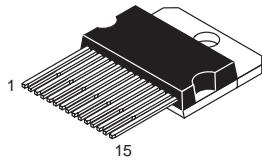



15

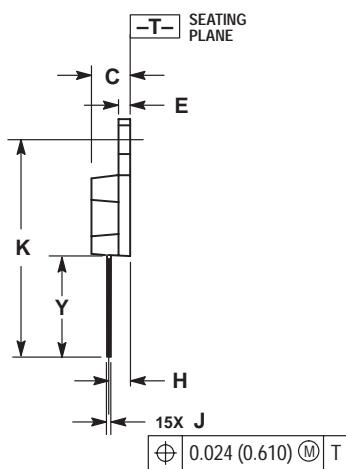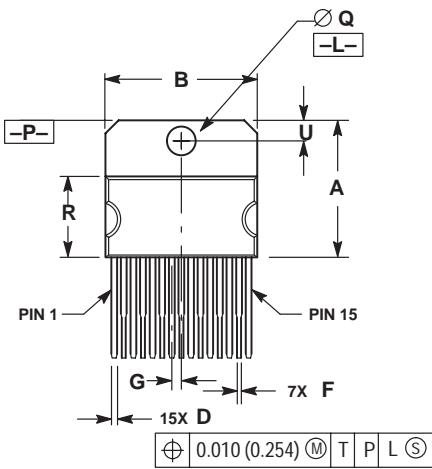

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION R DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
  4. DIMENSION B DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
  5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 (0.250).
  6. DELETED
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION, AT MAXIMUM MATERIAL CONDITION.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.681	0.694	17.298	17.627
B	0.784	0.792	19.914	20.116
C	0.173	0.181	4.395	4.597
D	0.024	0.031	0.610	0.787
E	0.058	0.062	1.473	1.574
F	0.016	0.023	0.407	0.584
G	0.050 BSC		1.270 BSC	
H	0.110 BSC		2.794 BSC	
J	0.018	0.024	0.458	0.609
K	1.078	1.086	27.382	27.584
Q	0.148	0.151	3.760	3.835
R	0.416	0.426	10.567	10.820
U	0.110 BSC		2.794 BSC	
Y	0.503 REF		12.776 REF	

**FTB SUFFIX**  
**CASE 824D-01**  
Plastic Package  
(TQFP-44)  
ISSUE O




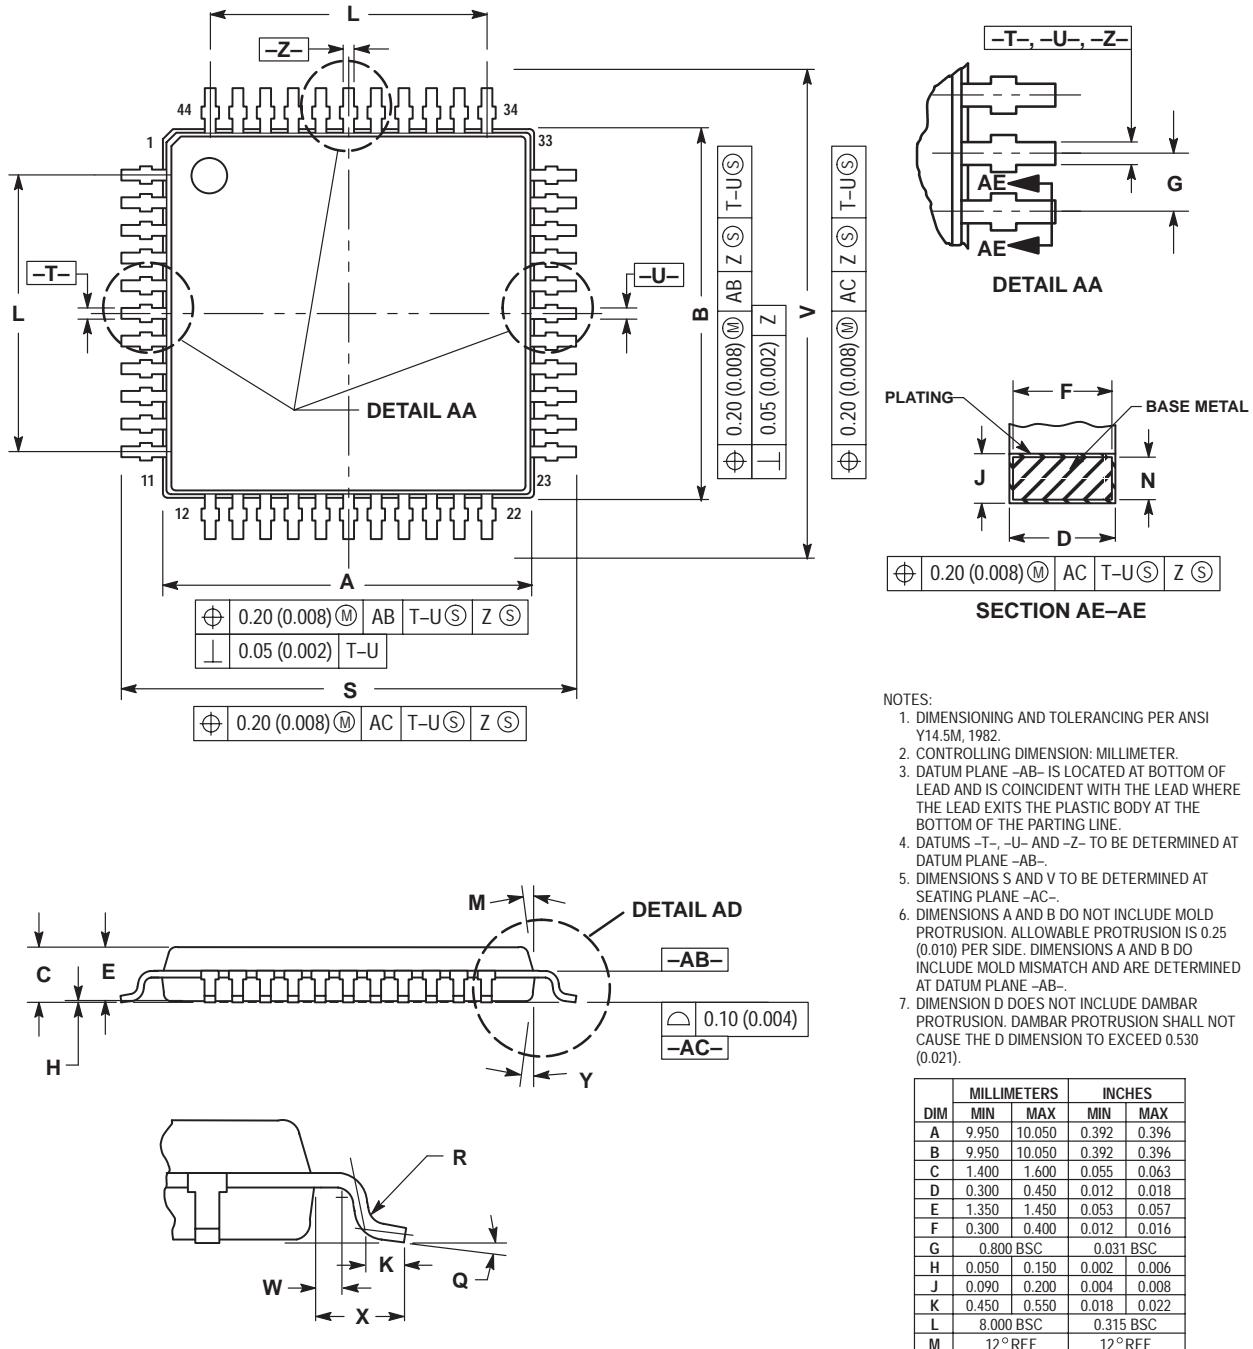



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -T-, -U- AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -AC-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.530 (0.021).

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.950	10.050	0.392	0.396
B	9.950	10.050	0.392	0.396
C	1.400	1.600	0.055	0.063
D	0.300	0.450	0.012	0.018
E	1.350	1.450	0.053	0.057
F	0.300	0.400	0.012	0.016
G	0.800	BSC	0.031	BSC
H	0.050	0.150	0.002	0.006
J	0.090	0.200	0.004	0.008
K	0.450	0.550	0.018	0.022
L	8.000	BSC	0.315	BSC
M	12° REF		12° REF	
N	0.090	0.160	0.004	0.006
Q	1°	5°	1°	5°
R	0.100	0.200	0.004	0.008
S	11.900	12.100	0.469	0.476
V	11.900	12.100	0.469	0.476
W	0.200	REF	0.008	REF
X	1.000	REF	0.039	REF
Y	12° REF		12° REF	


**FB SUFFIX**  
**CASE 824E-02**  
Plastic Package  
(QFP)  
ISSUE A

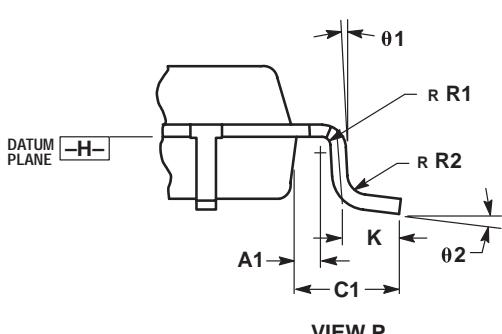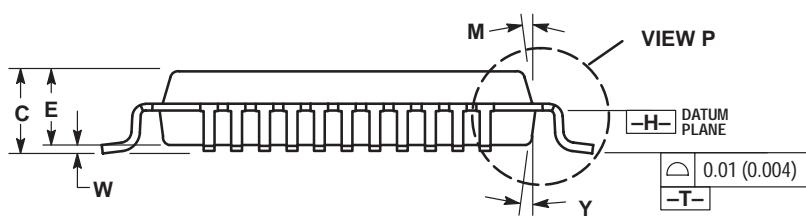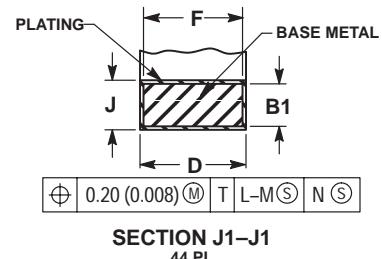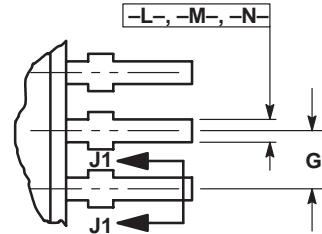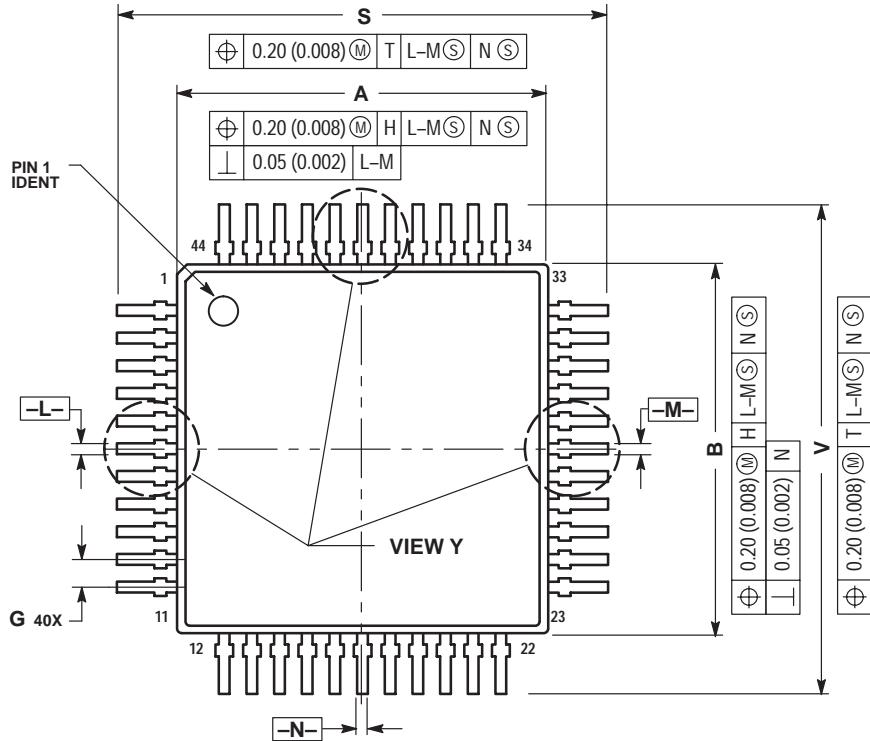



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  4. DATUMS -L-, -M- AND -N- TO BE DETERMINED AT DATUM PLANE -H-.
  5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -T-.
  6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.530 (0.021).

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.90	10.10	0.390	0.398
B	9.90	10.10	0.390	0.398
C	2.00	2.21	0.079	0.087
D	0.30	0.45	0.0118	0.0177
E	2.00	2.10	0.079	0.083
F	0.30	0.40	0.012	0.016
G	0.80	BSC	0.031	BSC
J	0.13	0.23	0.005	0.009
K	0.65	0.95	0.026	0.037
M	5°	10°	5°	10°
S	12.95	13.45	0.510	0.530
V	12.95	13.45	0.510	0.530
W	0.000	0.210	0.000	0.008
Y	5°	10°	5°	10°
A1	0.450	REF	0.018	REF
B1	0.130	0.170	0.005	0.007
C1	1.600	REF	0.063	REF
R1	0.130	0.300	0.005	0.012
R2	0.130	0.300	0.005	0.012
θ1	5°	10°	5°	10°
θ2	0°	7°	0°	7°


**FB SUFFIX**  
**CASE 840F-01**  
Plastic Package  
ISSUE O




64 1

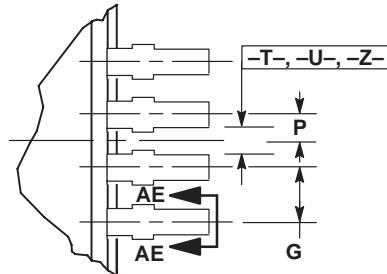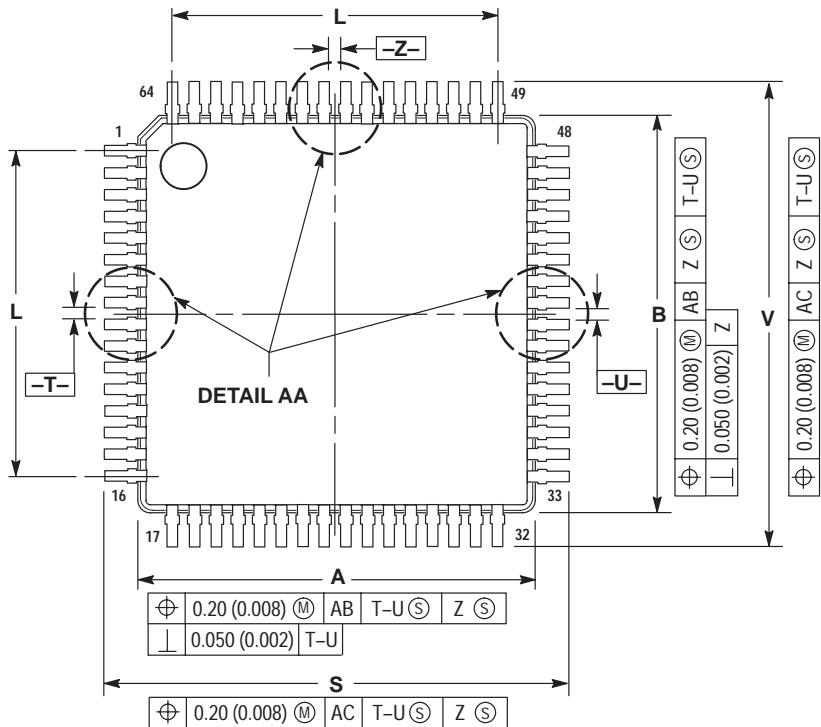


DETAIL AA

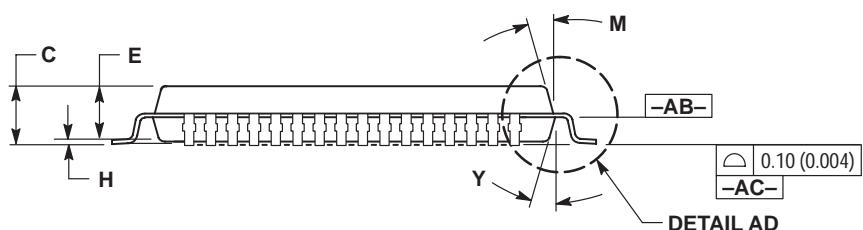

DETAIL AD

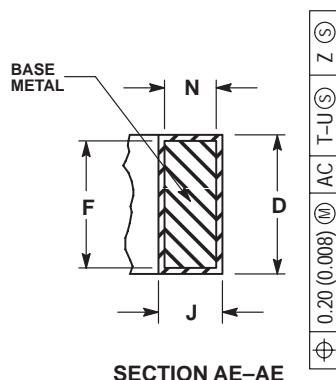

SECTION AE-AE

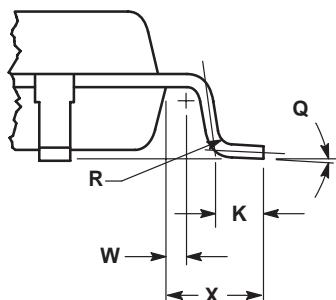


DETAIL AD

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -T-, -U- AND -Z- TO BE DETERMINED AT DATUM PLANE -AC-.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -AC-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.950	10.050	0.392	0.396
B	9.950	10.050	0.392	0.396
C	1.400	1.600	0.055	0.063
D	0.170	0.270	0.007	0.011
E	1.350	1.450	0.053	0.057
F	0.170	0.230	0.007	0.009
G	0.500 BSC		0.020 BSC	
H	0.050	0.150	0.002	0.006
J	0.090	0.200	0.004	0.008
K	0.450	0.550	0.018	0.022
L	7.500 BSC		0.295 BSC	
M	12° REF		12° REF	
N	0.090	0.160	0.004	0.006
P	0.250 BSC		0.010 BSC	
Q	1°	5°	1°	5°
R	0.100	0.200	0.004	0.008
S	11.900	12.100	0.469	0.476
V	11.900	12.100	0.469	0.476
W	0.200 REF		0.008 REF	
X	1.000 REF		0.039 REF	
Y	12° REF		12° REF	

**DM SUFFIX**  
**CASE 846A-02**  
 Plastic Package  
 (Micro-8)  
 ISSUE C





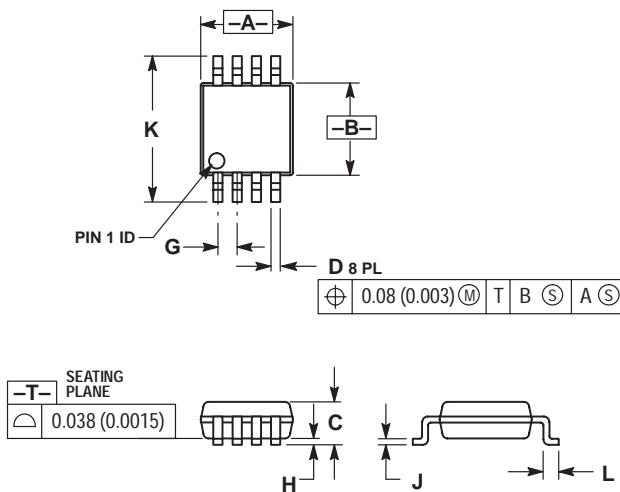


NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.90	3.10	0.114	0.122
B	2.90	3.10	0.114	0.122
C	---	1.10	---	0.043
D	0.25	0.40	0.010	0.016
G	0.65 BSC		0.026 BSC	
H	0.05	0.15	0.002	0.006
J	0.13	0.23	0.005	0.009
K	4.75	5.05	0.187	0.199
L	0.40	0.70	0.016	0.028

**FB SUFFIX**  
**CASE 848B-04**  
Plastic Package  
(TQFP-52)  
ISSUE C

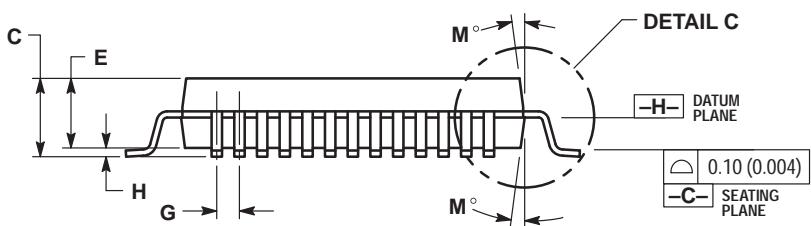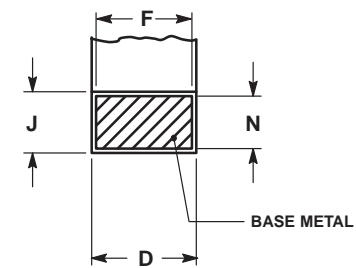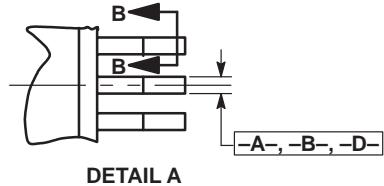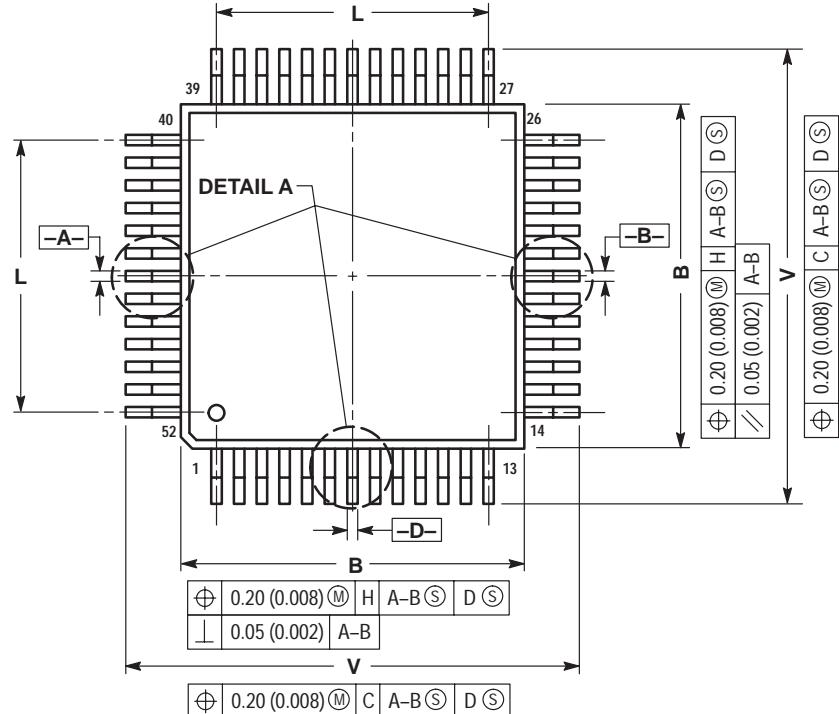

**SECTION B-B**

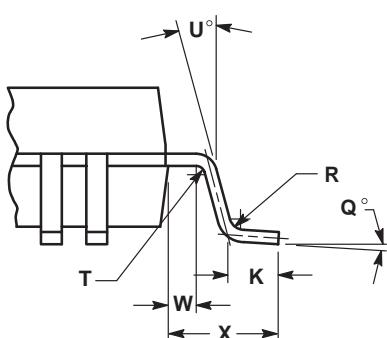


**DETAIL C**



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  4. DATUMS -A-, -B-, AND -D- TO BE DETERMINED AT DATUM PLANE -H-.
  5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -C-.
  6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.90	10.10	0.390	0.398
B	9.90	10.10	0.390	0.398
C	2.10	2.45	0.083	0.096
D	0.22	0.38	0.009	0.015
E	2.00	2.10	0.079	0.083
F	0.22	0.33	0.009	0.013
G	0.65 BSC		0.026 BSC	
H	—	0.25	—	0.010
J	0.13	0.23	0.005	0.009
K	0.65	0.95	0.026	0.037
L	7.80 REF		0.307 REF	
M	5°	10°	5°	10°
N	0.13	0.17	0.005	0.007
Q	0°	7°	0°	7°
R	0.13	0.30	0.005	0.012
S	12.95	13.45	0.510	0.530
T	0.13	—	0.005	—
U	0°	—	0°	—
V	12.95	13.45	0.510	0.530
W	0.35	0.45	0.014	0.018
X	1.6 REF		0.063 REF	


**FB SUFFIX**  
**CASE 848D-03**  
Plastic Package  
ISSUE C



52 1

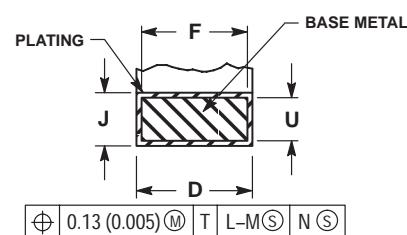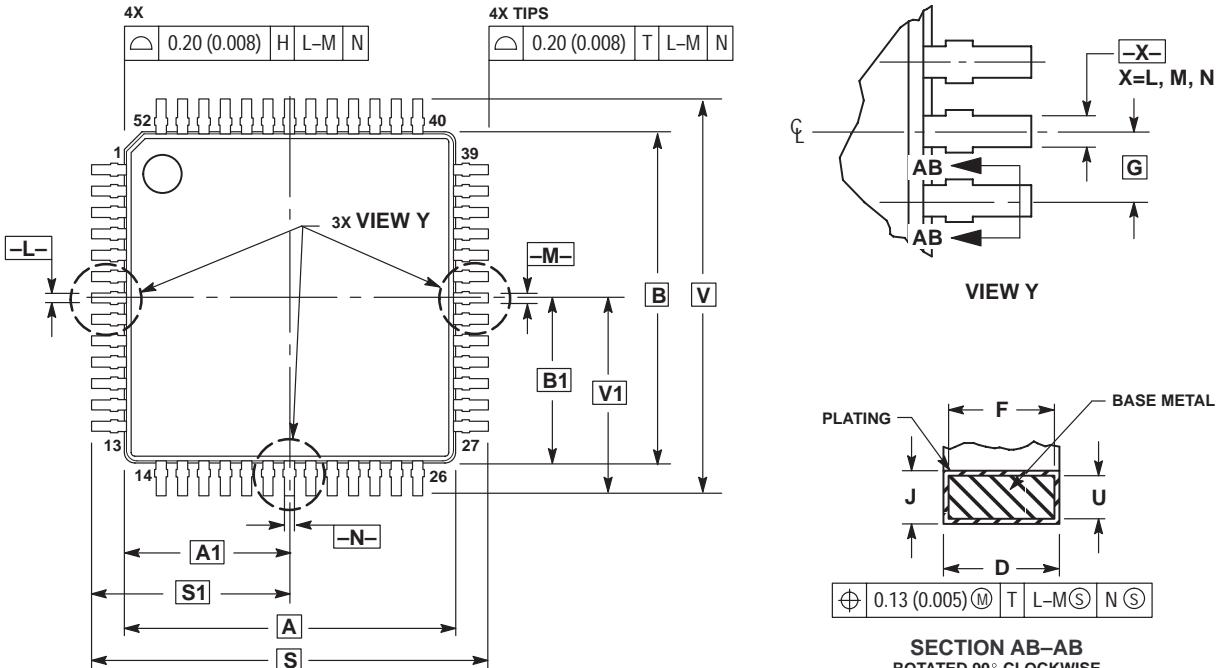



SECTION AB-AB  
ROTATED 90° CLOCKWISE

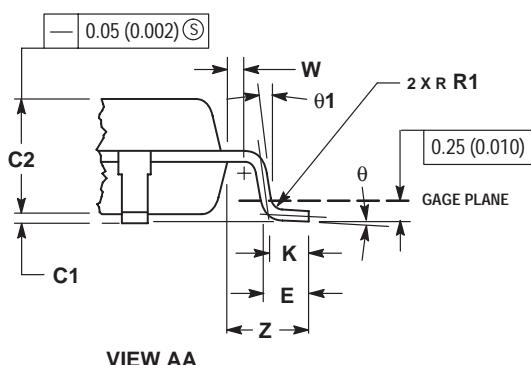

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  4. DATUMS -L-, -M- AND -N- TO BE DETERMINED AT DATUM PLANE -H-.
  5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -T-.
  6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED 0.46 (0.018). MINIMUM SPACE BETWEEN PROTRUSION AND ADJACENT LEAD OR PROTRUSION 0.07 (0.003).

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	10.00	BSC	0.394	BSC
A1	5.00	BSC	0.197	BSC
B	10.00	BSC	0.394	BSC
B1	5.00	BSC	0.197	BSC
C	—	1.70	—	0.067
C1	0.05	0.20	0.002	0.008
C2	1.30	1.50	0.051	0.059
D	0.20	0.40	0.008	0.016
E	0.45	0.75	0.018	0.030
F	0.22	0.35	0.009	0.014
G	0.65	BSC	0.026	BSC
J	0.07	0.20	0.003	0.008
K	0.50	REF	0.020	REF
R1	0.08	0.20	0.003	0.008
S	12.00	BSC	0.472	BSC
S1	6.00	BSC	0.236	BSC
U	0.09	0.16	0.004	0.006
V	12.00	BSC	0.472	BSC
V1	6.00	BSC	0.236	BSC
W	0.20	REF	0.008	REF
Z	1.00	REF	0.039	REF
θ	0°	7°	0°	7°
θ1	0°	—	0°	—
θ2	12°	REF	12°	REF
θ3	5°	13°	5°	13°



**B SUFFIX**  
**CASE 858-01**  
Plastic Package  
ISSUE O

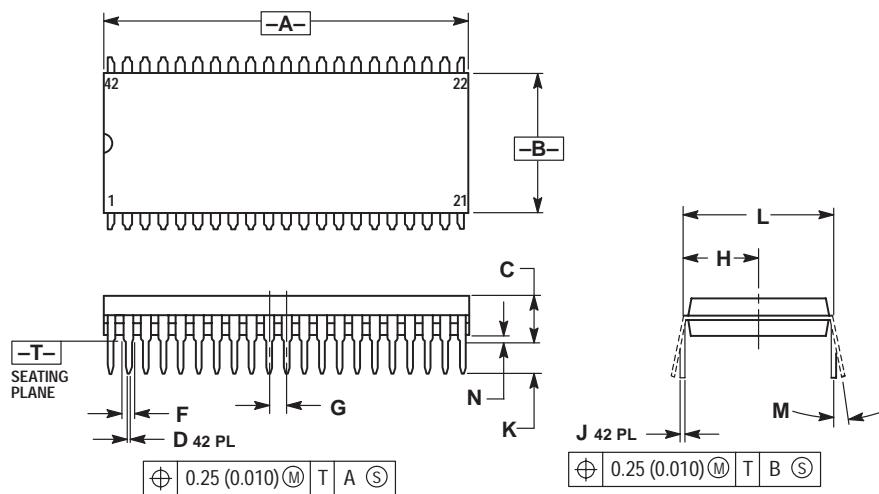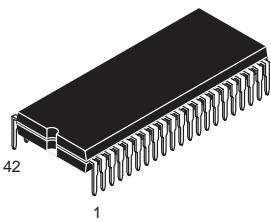

NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.  
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.  
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH. MAXIMUM MOLD FLASH 0.25 (0.010).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.435	1.465	36.45	37.21
B	0.540	0.560	13.72	14.22
C	0.155	0.200	3.94	5.08
D	0.014	0.022	0.36	0.56
F	0.032	0.046	0.81	1.17
G	0.070 BSC		1.778 BSC	
H	0.300 BSC		7.62 BSC	
J	0.008	0.015	0.20	0.38
K	0.115	0.135	2.92	3.43
L	0.600 BSC		15.24 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.02

**B SUFFIX**  
**CASE 859-01**  
Plastic Package  
(SDIP)  
ISSUE O

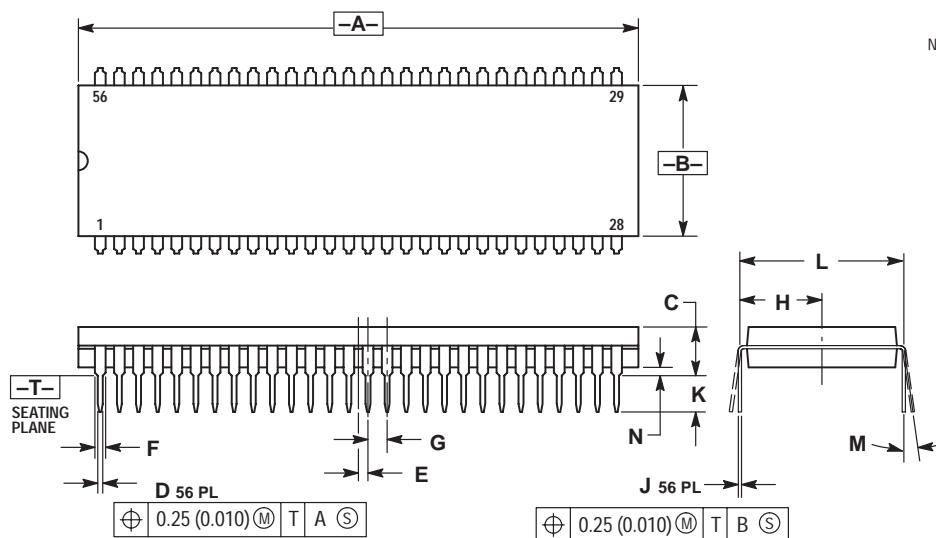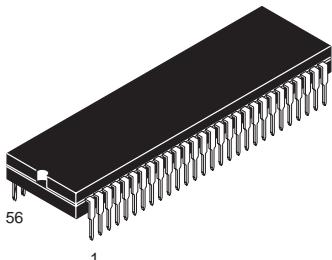

NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.  
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.  
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH. MAXIMUM MOLD FLASH 0.25 (0.010).




DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	2.035	2.065	51.69	52.45
B	0.540	0.560	13.72	14.22
C	0.155	0.200	3.94	5.08
D	0.014	0.022	0.36	0.56
E	0.035 BSC		0.89 BSC	
F	0.032	0.046	0.81	1.17
G	0.070 BSC		1.778 BSC	
H	0.300 BSC		7.62 BSC	
J	0.008	0.015	0.20	0.38
K	0.115	0.135	2.92	3.43
L	0.600 BSC		15.24 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.02

**FB, FTB SUFFIX**
**CASE 873-01**



Plastic Package

(TQFP-32)

ISSUE A

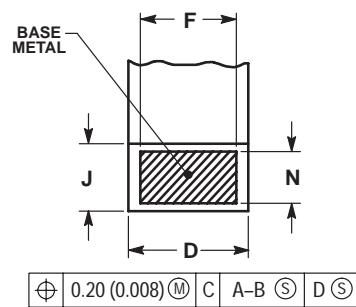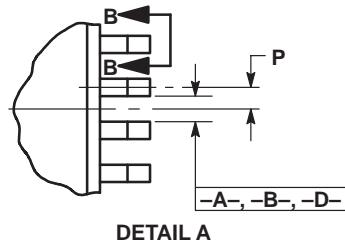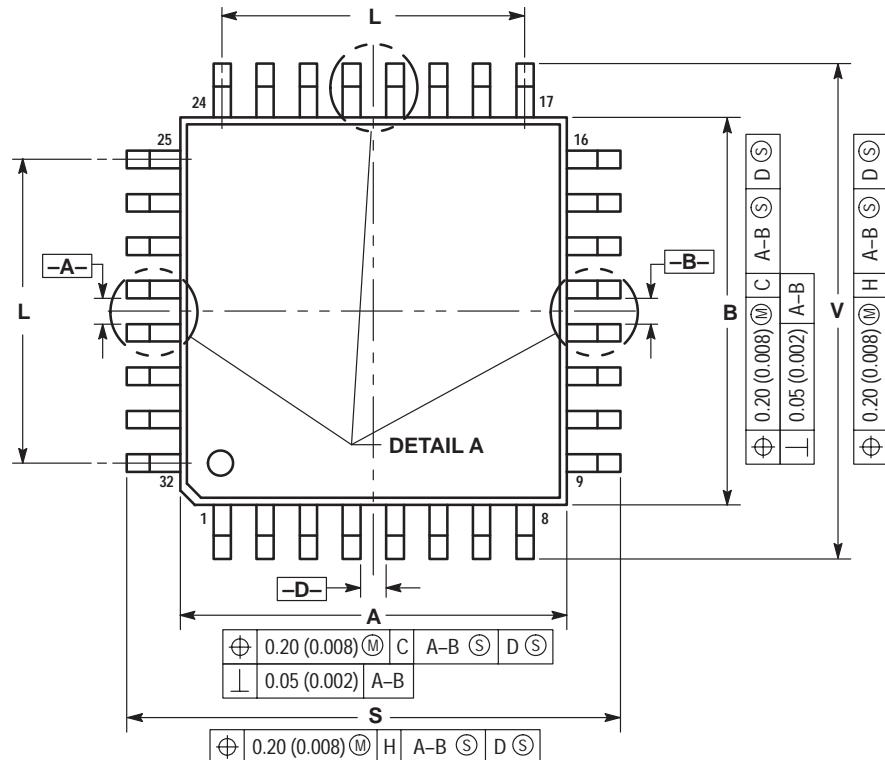

**SECTION B-B**  
VIEW ROTATED 90° CLOCKWISE


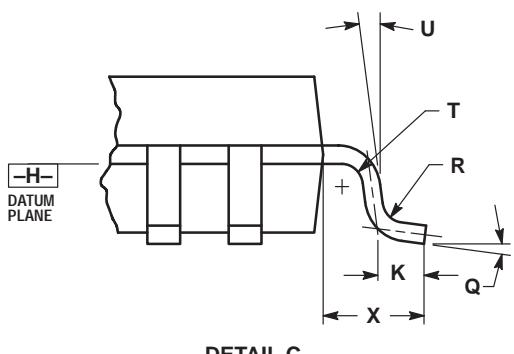
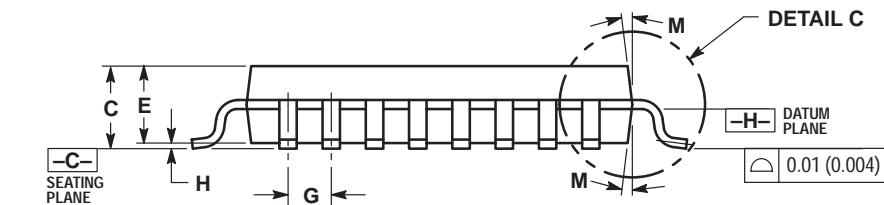


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -A-, -B- AND -D- TO BE DETERMINED AT DATUM PLANE -H-.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -C-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.95	7.10	0.274	0.280
B	6.95	7.10	0.274	0.280
C	1.40	1.60	0.055	0.063
D	0.273	0.373	0.010	0.015
E	1.30	1.50	0.051	0.059
F	0.273	—	0.010	—
G	0.80	BSC	0.031	BSC
H	—	0.20	—	0.008
J	0.119	0.197	0.005	0.008
K	0.33	0.57	0.013	0.022
L	5.6	REF	0.220	REF
M	6°	8°	6°	8°
N	0.119	0.135	0.005	0.005
P	0.40	BSC	0.016	BSC
Q	5°	10°	5°	10°
R	0.15	0.25	0.006	0.010
S	8.85	9.15	0.348	0.360
T	0.15	0.25	0.006	0.010
U	5°	11°	5°	11°
V	8.85	9.15	0.348	0.360
X	1.00	REF	0.039	REF

**T SUFFIX**  
**CASE 894-03**  
 Plastic Package  
 (23-Pin SZIP)  
 ISSUE B


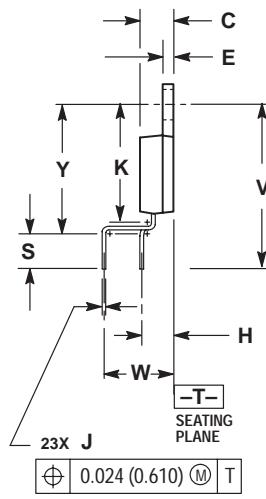
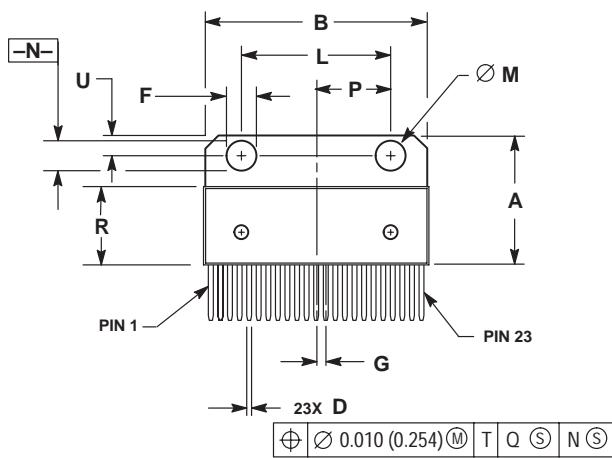
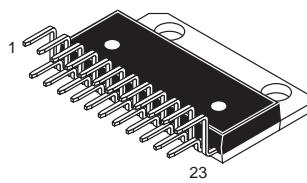


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION R DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 (0.250).
6. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.684	0.694	17.374	17.627
B	1.183	1.193	30.048	30.302
C	0.175	0.179	4.445	4.547
D	0.026	0.031	0.660	0.787
E	0.058	0.062	1.473	1.574
F	0.165	0.175	4.191	4.445
G	0.050	BSC	1.270	BSC
H	0.169	BSC	4.293	BSC
J	0.014	0.020	0.356	0.508
K	0.625	0.639	15.875	16.231
L	0.770	0.790	19.558	20.066
M	0.148	0.152	3.760	3.861
N	0.148	0.152	3.760	3.861
P	0.390	BSC	9.906	BSC
R	0.416	0.424	10.566	10.770
S	0.157	0.167	3.988	4.242
U	0.105	0.115	2.667	2.921
V	0.868	REF	22.047	REF
W	0.200	BSC	5.080	BSC
Y	0.700	0.710	17.780	18.034


**FTA SUFFIX**  
**CASE 932-02**  
Plastic Package  
(TQFP-48)  
ISSUE D

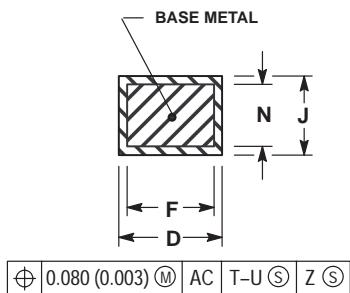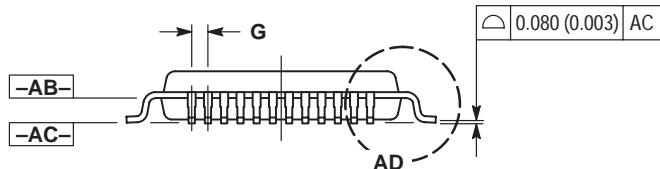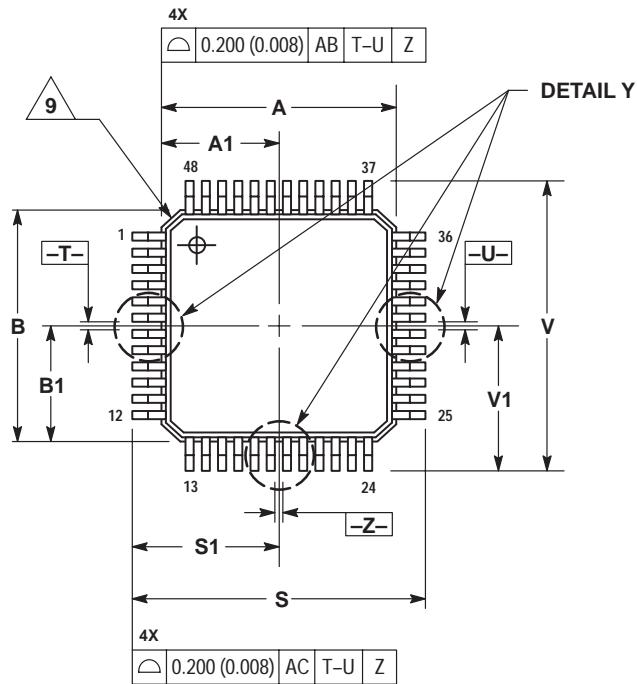

**SECTION AE-AE**




NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -T-, -U-, AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -AC-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO NOT INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).
8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.0003).
9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.

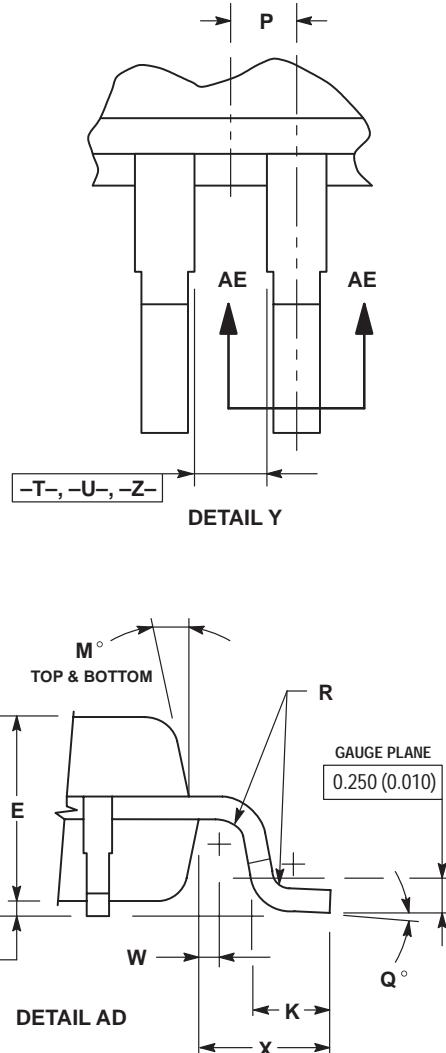

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	7.000	BSC	0.276	BSC
A1	3.500	BSC	0.138	BSC
B	7.000	BSC	0.276	BSC
B1	3.500	BSC	0.138	BSC
C	1.400	1.600	0.055	0.063
D	0.170	0.270	0.007	0.009
E	1.350	1.450	0.053	0.057
F	0.170	0.230	0.007	0.009
G	0.500	BASIC	0.020	BASIC
H	0.050	0.150	0.002	0.006
J	0.090	0.200	0.004	0.008
K	0.500	0.700	0.020	0.028
M	12 °REF		12 °REF	
N	0.090	0.160	0.004	0.006
P	0.250	BASIC	0.010	BASIC
Q	1 °	5 °	1 °	5 °
R	0.150	0.250	0.006	0.010
S	9.000	BSC	0.354	BSC
S1	4.500	BSC	0.177	BSC
V	9.000	BSC	0.354	BSC
V1	4.500	BSC	0.177	BSC
W	0.200	REF	0.008	REF
X	1.000	REF	0.039	REF

**D2T SUFFIX**  
**CASE 936-03**  
 Plastic Package  
 ISSUE B


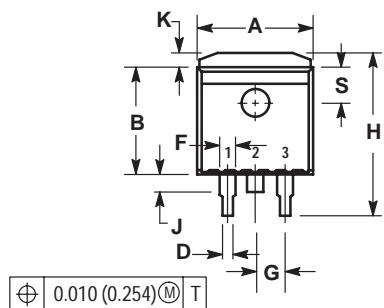



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 4.
5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.386	0.403	9.804	10.236
B	0.356	0.368	9.042	9.347
C	0.170	0.180	4.318	4.572
D	0.026	0.036	0.660	0.914
E	0.045	0.055	1.143	1.397
F	0.051	REF	1.295	REF
G	0.100	BSC	2.540	BSC
H	0.539	0.579	13.691	14.707
J	0.125	MAX	3.175	MAX
K	0.050	REF	1.270	REF
L	0.000	0.010	0.000	0.254
M	0.088	0.102	2.235	2.591
N	0.018	0.026	0.457	0.660
P	0.058	0.078	1.473	1.981
R	5°	REF	5°	REF
S	0.116	REF	2.946	REF
U	0.200	MIN	5.080	MIN
V	0.250	MIN	6.350	MIN

**D2T SUFFIX**  
**CASE 936A-02**  
 Plastic Package  
 (D<sup>2</sup>PAK)  
 ISSUE A

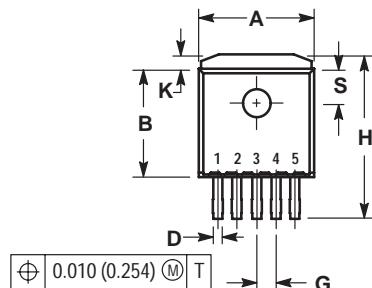

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 6.
5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.386	0.403	9.804	10.236
B	0.356	0.368	9.042	9.347
C	0.170	0.180	4.318	4.572
D	0.026	0.036	0.660	0.914
E	0.045	0.055	1.143	1.397
G	0.067	BSC	1.702	BSC
H	0.539	0.579	13.691	14.707
K	0.050	REF	1.270	REF
L	0.000	0.010	0.000	0.254
M	0.088	0.102	2.235	2.591
N	0.018	0.026	0.457	0.660
P	0.058	0.078	1.473	1.981
R	5°	REF	5°	REF
S	0.116	REF	2.946	REF
U	0.200	MIN	5.080	MIN
V	0.250	MIN	6.350	MIN




**DT, DTB SUFFIX**

**CASE 948E-02**


Plastic Package

(TSSOP-20)


ISSUE A

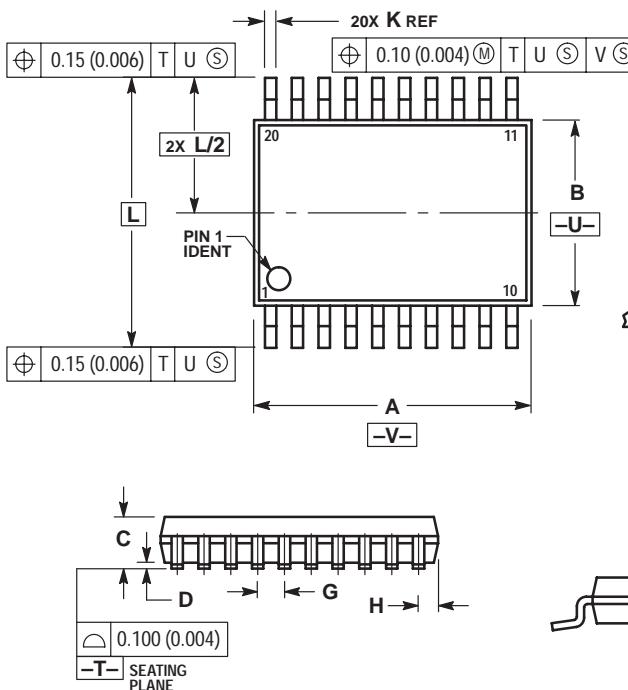

SECTION N-N



DETAIL E

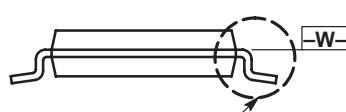

DETAIL E

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.40	6.60	0.252	0.260
B	4.30	4.50	0.169	0.177
C	—	—	1.20	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC	0.026 BSC		
H	0.27	0.37	0.011	0.015
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC	0.252 BSC		
M	0°	8°	0°	8°


**DTB SUFFIX**

**CASE 948F-01**


Plastic Package

(TSSOP-16, TSSOP-16L)

ISSUE O

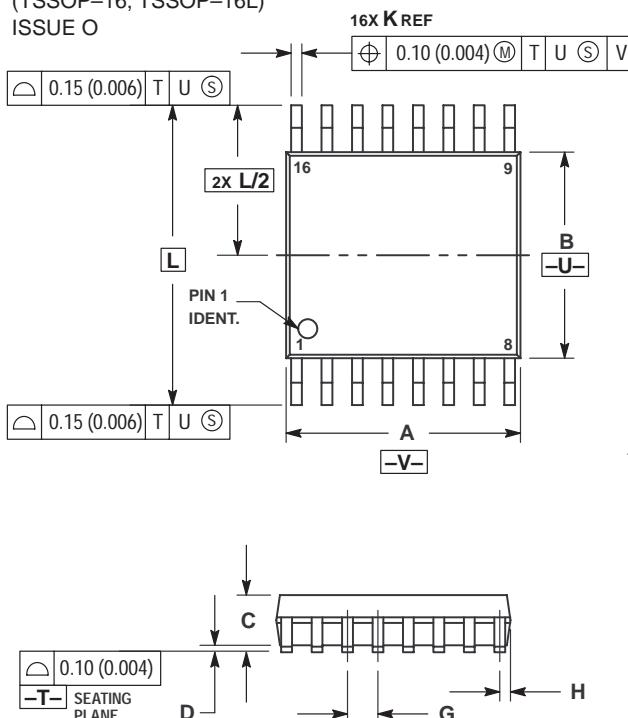

SECTION N-N



DETAIL E



DETAIL E

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	—	—	1.20	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC	0.026 BSC		
H	0.18	0.28	0.007	0.011
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC	0.252 BSC		
M	0°	8°	0°	8°

DTB SUFFIX

CASE 948G-01


Plastic Package

(TSSOP-14)

ISSUE O



14X K REF


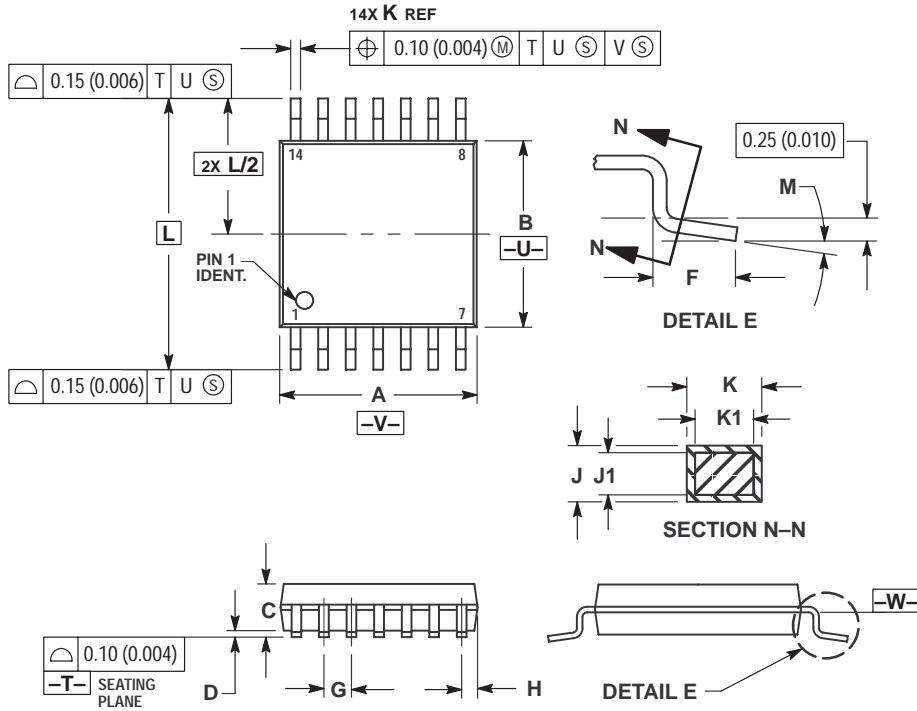


NOTES:


- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- 2 CONTROLLING DIMENSION: MILLIMETER.
- 3 DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
- 4 DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
- 5 DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
- 6 TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
- 7 DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	—	—	0.047	—
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC	—	0.026 BSC	—
H	0.50	0.60	0.020	0.024
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC	—	0.252 BSC	—
M	0°	8°	0°	8°




**DTB SUFFIX**  
**CASE 948H-01**  
 Plastic Package  
 ISSUE O

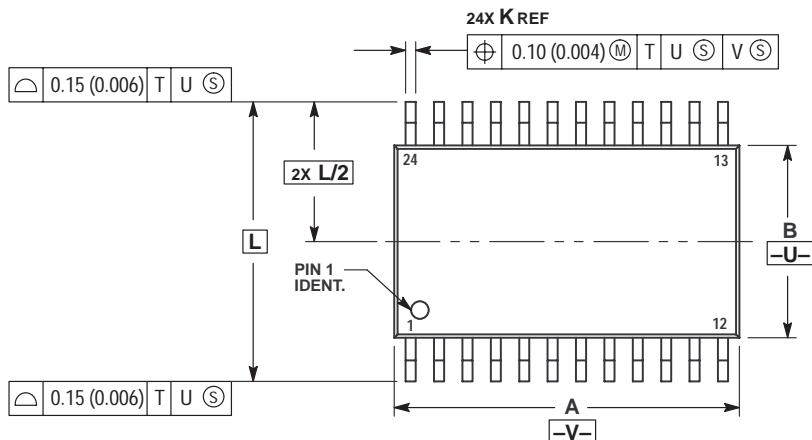


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

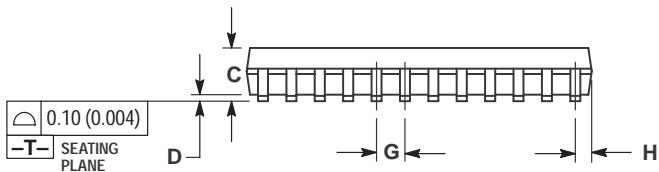

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	7.70	7.90	0.303	0.311
B	4.30	4.50	0.169	0.177
C	—	1.20	—	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC	—	0.026 BSC	—
H	0.27	0.37	0.011	0.015
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC	—	0.252 BSC	—
M	0°	8°	0°	8°

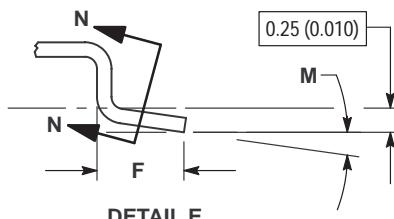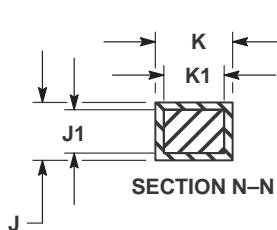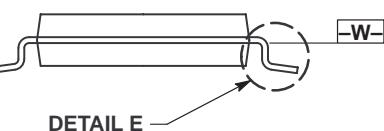


**DTB SUFFIX**  
**CASE 948J-01**  
Plastic Package  
(TSSOP-8)  
ISSUE O

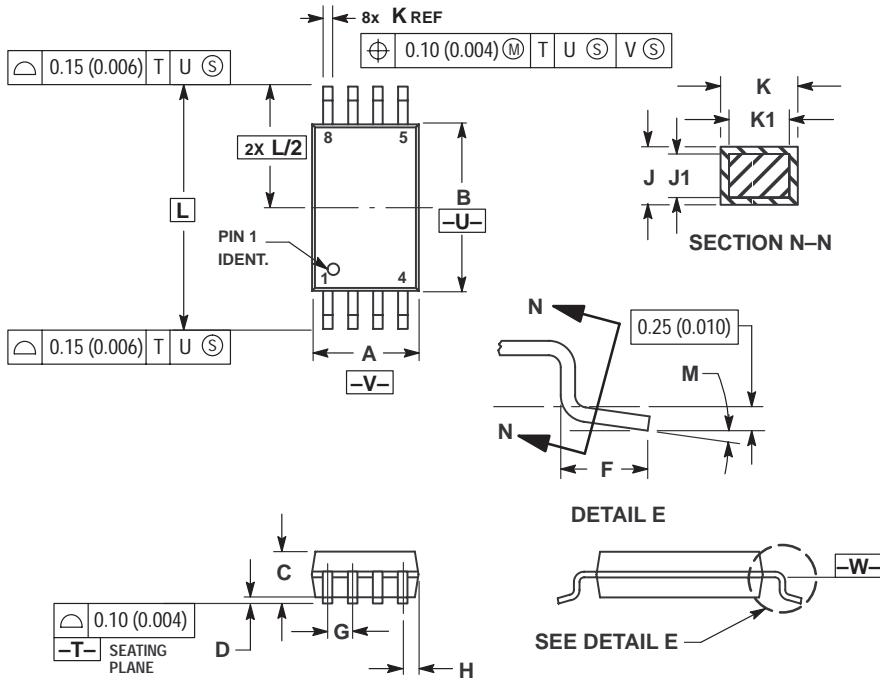

- NOTES:**
- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - 2 CONTROLLING DIMENSION: MILLIMETER.
  - 3 DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  - 4 DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  - 5 DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  - 6 TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  - 7 DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.90	3.10	0.114	0.122
B	4.30	4.50	0.169	0.177
C	—	1.20	—	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC	—	0.026 BSC	—
H	0.50	0.60	0.020	0.024
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC	—	0.252 BSC	—
M	0°	8°	0°	8°


**M SUFFIX**  
**CASE 967-01**  
Plastic Package  
(EIAJ-20)  
ISSUE O

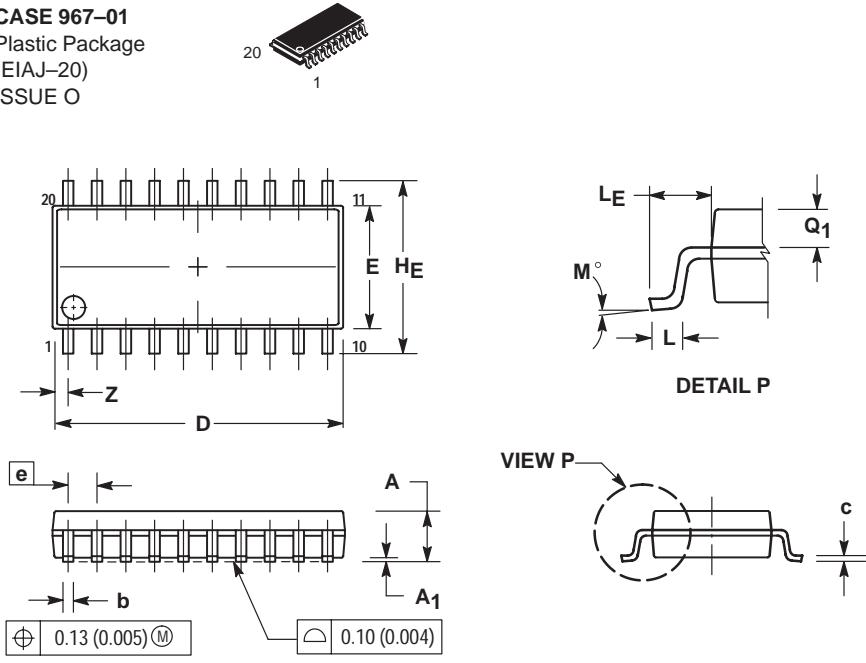


- NOTES:**
- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - 2 CONTROLLING DIMENSION: MILLIMETER.
  - 3 DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  - 4 TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  - 5 THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	—	2.05	—	0.081
A <sub>1</sub>	0.05	0.20	0.002	0.008
b	0.35	0.50	0.014	0.020
c	0.18	0.27	0.007	0.011
D	12.35	12.80	0.486	0.504
E	5.10	5.45	0.201	0.215
e	1.27 BSC	—	0.050 BSC	—
H <sub>E</sub>	7.40	8.20	0.291	0.323
L	0.50	0.85	0.020	0.033
L <sub>E</sub>	1.10	1.50	0.043	0.059
M	0°	10°	0°	10°
Q <sub>1</sub>	0.70	0.90	0.028	0.035
Z	—	0.81	—	0.032

**FTB SUFFIX**  
**CASE 976-01**  
Plastic Package  
(TQFP-20)  
ISSUE O





20 1

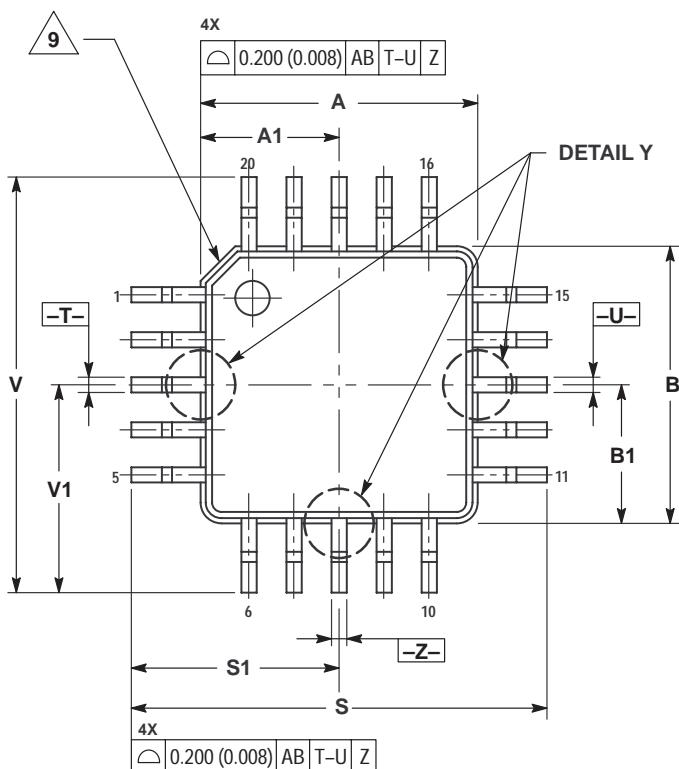

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -T-, -U-, AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
5. DIMENSIONS S AND V TO BE DETERMINED AT DATUM PLANE -AC-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO NOT INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).
8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.003).
9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.000	BSC	0.157	BSC
A1	2.000	BSC	0.079	BSC
B	4.000	BSC	0.157	BSC
B1	2.000	BSC	0.079	BSC
C	1.400	1.600	0.055	0.063
D	0.170	0.270	0.007	0.011
E	1.350	1.450	0.053	0.057
F	0.170	0.230	0.007	0.009
G	0.650	BSC	0.026	BSC
H	0.050	0.150	0.002	0.006
J	0.090	0.200	0.004	0.008
K	0.500	0.700	0.020	0.028
M	12° REF		12° REF	
N	0.090	0.160	0.004	0.006
P	0.250	BSC	0.010	BSC
Q	1°	5°	1°	5°
R	0.150	0.250	0.006	0.010
S	6.000	BSC	0.236	BSC
S1	3.000	BSC	0.118	BSC
V	6.000	BSC	0.236	BSC
V1	3.000	BSC	0.118	BSC
W	0.200	REF	0.008	REF
X	1.000	REF	0.039	REF

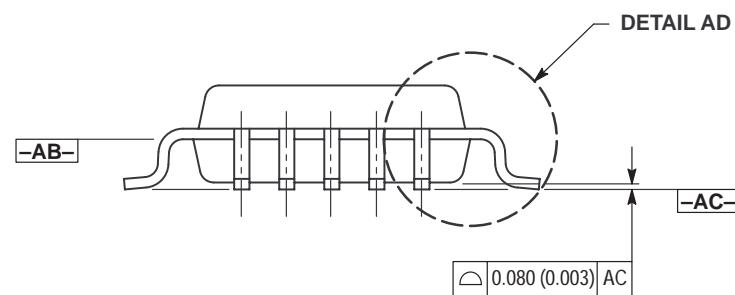


(+) 0.080 (0.003) (S) AC T-U (S) Z (S)

**SECTION AE-AE**

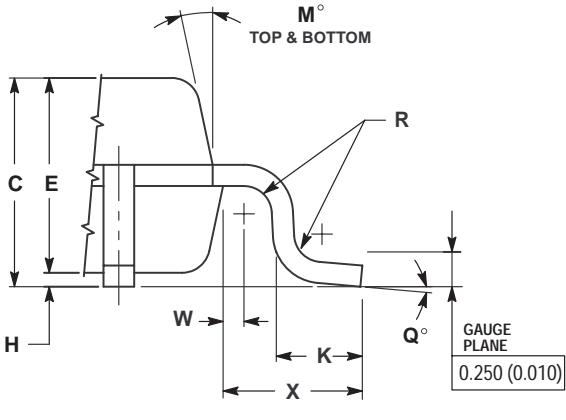


DETAIL AD

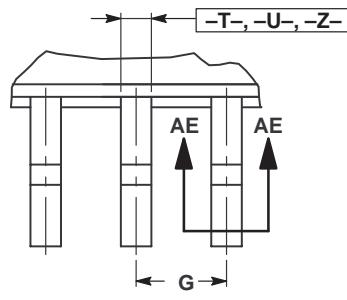


DETAIL Y

**FTA SUFFIX**  
**CASE 977-01**  
 Plastic Package  
 ISSUE O




24 1

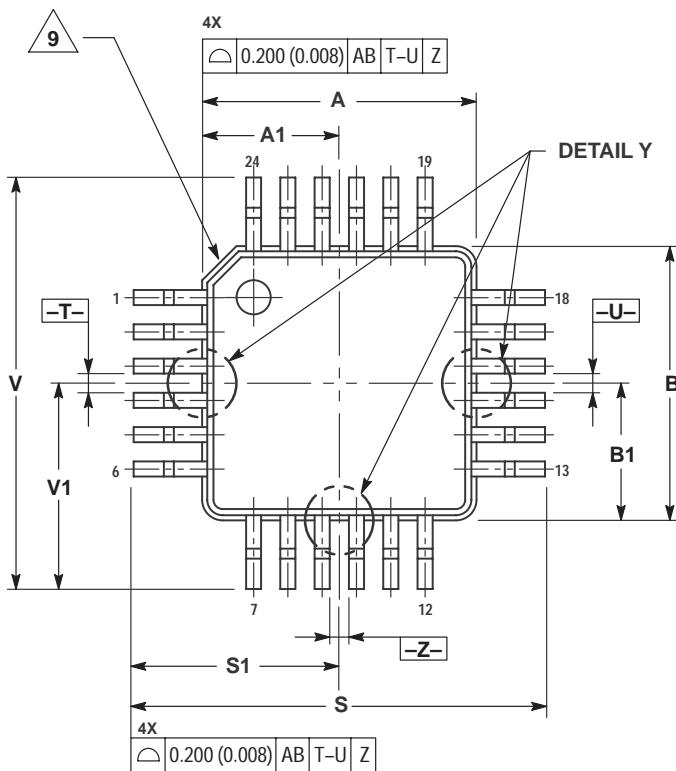


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -T-, -U-, AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
5. DIMENSIONS S AND V TO BE DETERMINED AT DATUM PLANE -AC-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
7. DATUM D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).
8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.003).
9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.000	BSC	0.157	BSC
A1	2.000	BSC	0.079	BSC
B	4.000	BSC	0.157	BSC
B1	2.000	BSC	0.079	BSC
C	1.400	1.600	0.055	0.063
D	0.170	0.270	0.007	0.011
E	1.350	1.450	0.053	0.057
F	0.170	0.230	0.007	0.009
G	0.500	BSC	0.020	BSC
H	0.050	0.150	0.002	0.006
J	0.090	0.200	0.004	0.008
K	0.500	0.700	0.020	0.028
M	12°	REF	12°	REF
N	0.090	0.160	0.004	0.006
P	0.250	BSC	0.010	BSC
Q	1°	5°	1°	5°
R	0.150	0.250	0.006	0.010
S	6.000	BSC	0.236	BSC
S1	3.000	BSC	0.118	BSC
V	6.000	BSC	0.236	BSC
V1	3.000	BSC	0.118	BSC
W	0.200	REF	0.008	REF
X	1.000	REF	0.039	REF

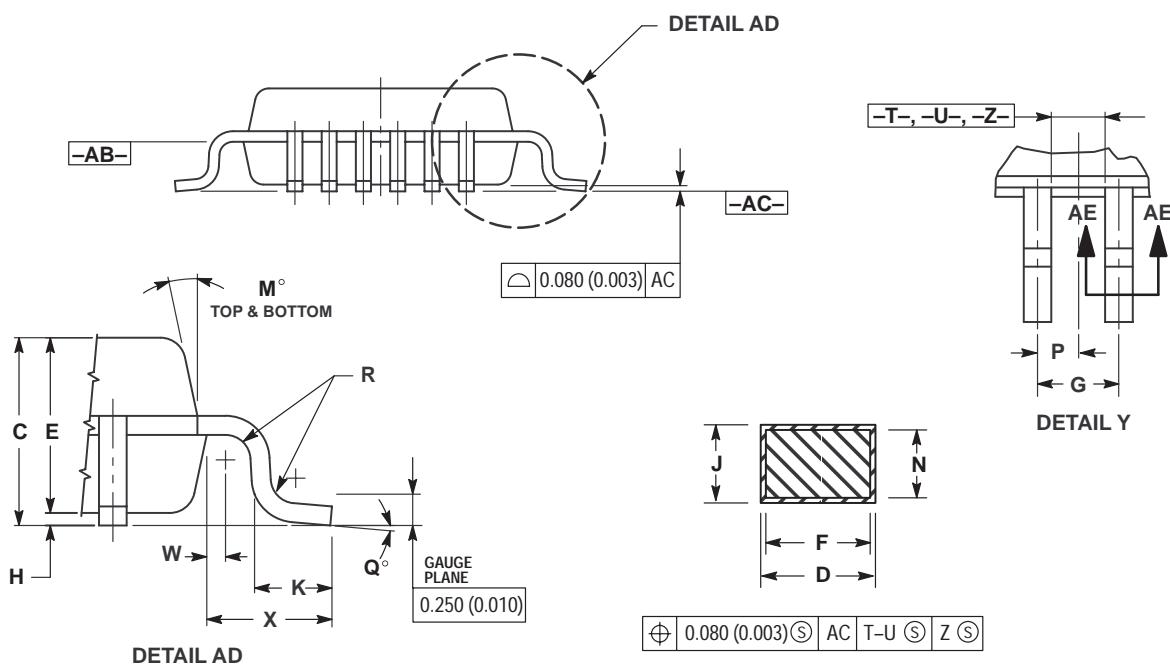


**N SUFFIX**  
**CASE 1212-01**  
Plastic Package  
(SOT-23)  
ISSUE O

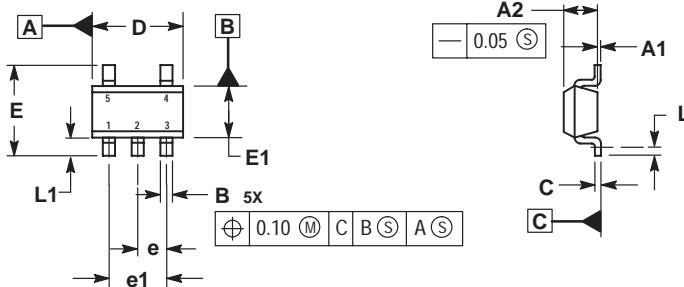

NOTES:  
1. DIMENSIONS ARE IN MILLIMETERS.  
2. INTERPRET DIMENSIONS AND TOLERANCES  
PER ASME Y14.5M, 1994.  
3. DATUM C IS A SEATING PLANE.

	MILLIMETERS	
DIM	MIN	MAX
A1	0.00	0.10
A2	1.00	1.30
B	0.30	0.50
C	0.10	0.25
D	2.80	3.00
E	2.50	3.10
E1	1.50	1.80
e	0.95 BSC	
e1	1.90 BSC	
L	0.20	---
L1	0.45	0.75

**H SUFFIX**  
**CASE 1213-01**  
Plastic Package  
(SOT-89)  
ISSUE O

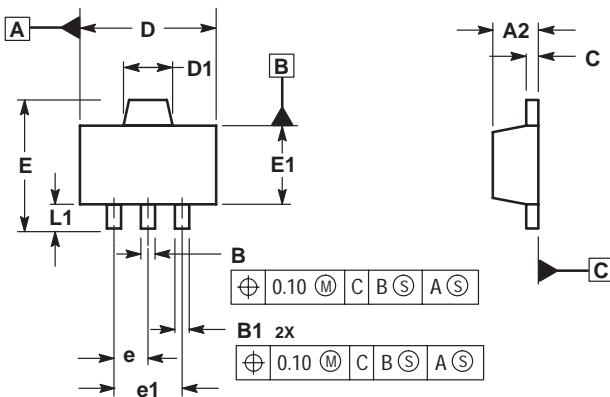

NOTES:  
1. DIMENSIONS ARE IN MILLIMETERS.  
2. INTERPRET DIMENSIONS AND TOLERANCING  
PER ASME Y14.5M, 1994.  
3. DATUM C IS A SEATING PLANE.

	MILLIMETERS	
DIM	MIN	MAX
A2	1.40	1.60
B	0.37	0.57
B1	0.32	0.52
C	0.30	0.50
D	4.40	4.60
D1	1.50	1.70
E	----	4.25
E1	2.40	2.60
e	1.50 BSC	
e1	3.00 BSC	
L1	0.80	---