
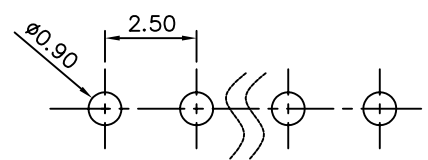
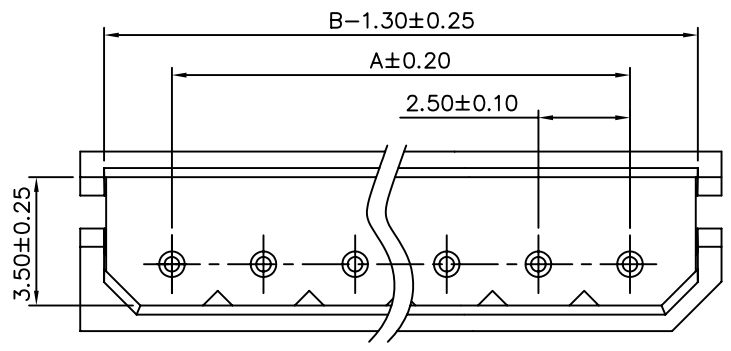
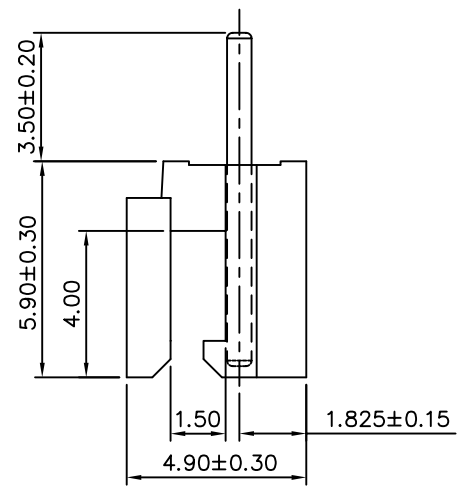


**SPECIFICATIONS**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C~+85°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 800V AC/Minute  
 Material: PA66,UL 94V-0  
 RoHS Compliant

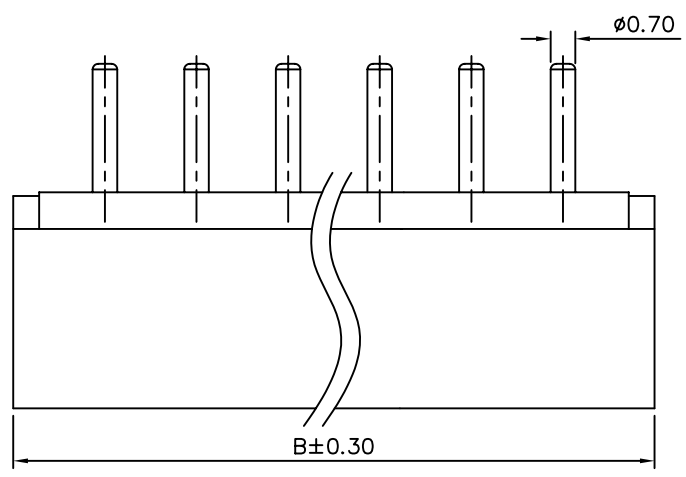

Recommended P.C.B Layout(Top Side)  
 P.C.B Thickness=1.20mm(Tolerance=±0.05)

Pos.	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ~10 ±0.15 20~30 ±0.30 30~ ±0.50 ANG. ±2°				
PART No. MWXXD-H		MEI						
DRAWING No. MWXXD-H		SHIN						
SCALE NONE		INGRID						
REV.	A0	UNIT mm	NO. REV.	NEW RELEASE	SHIN	01/10/2007		
				REVISIONS	CHK	DATE		