




Glass Passivated Single-Phase Bridge Rectifier

Major Ratings and Characteristics

$I_{F(AV)}$	0.9 A
V_{RRM}	65 V to 600 V
I_{FSM}	45 A
I_R	10 μ A
V_F	1.0 V
T_j max.	125 °C

Case Style WOG

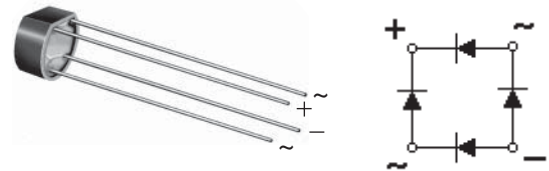

Features

- Ideal for printed circuit boards
- High case dielectric strength
- High surge current capability
- Typical I_R less than 0.1 μ A
- Solder Dip 260 °C, 40 seconds



Mechanical Data

Case: WOG

Epoxy meets UL-94V-0 Flammability rating

Terminals: Silver plated (E4 Suffix) leads, solderable per J-STD-002B and JESD22-B102D

Polarity: As marked on body

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Power Supply, Adapter, Charger, Lighting Ballaster on Consumers and Home Appliances applications

Maximum Ratings

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	B40 C800G	B80 C800G	B125 C800G	B250 C800G	B380 C800G	Units
Maximum repetitive peak reverse voltage	V_{RRM}	65	125	200	400	600	V
Maximum RMS input voltage R + C-load	V_{RMS}	40	80	125	250	380	V
Maximum average forward output current for free air operation at $T_A = 45$ °C	$I_{F(AV)}$	0.9 0.8					A
Maximum non-repetitive peak voltage	V_{RSM}	100	200	350	600	1000	V
Maximum DC blocking voltage	V_{DC}	65	125	200	400	600	V
Maximum peak working voltage	V_{RWM}	90	180	300	600	900	V
Maximum repetitive peak forward surge current	I_{FRM}	10					A
Peak forward surge current single sine wave on rated load	I_{FSM}	45					A
Rating for fusing at $T_J = 125$ °C ($t < 100$ ms)	I^2t	10					A ² sec
Minimum series resistor C-load at $V_{RMS} = \pm 10$ %	R_t	1.0	2.0	4.0	8.0	12	Ω
Maximum load capacitance	C_L	5000	2500	1000	500	200	μ F
Operating junction temperature range	T_J	- 40 to + 125					°C
Storage temperature range	T_{STG}	- 40 to + 150					°C

B40C800G thru B380C800G



Vishay General Semiconductor

Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Test condition	Symbols	B40 C800G	B80 C800G	B125 C800G	B250 C800G	B380 C800G	Units
Maximum instantaneous forward voltage drop per leg	at 0.9 A	V_F	1.0					V
Maximum reverse current at rated repetitive peak voltage per leg		I_R	10					μA

Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	B40 C800G	B80 C800G	B125 C800G	B250 C800G	B380 C800G	Units
Typical thermal resistance per leg ⁽¹⁾	$R_{\theta JA}$ $R_{\theta JL}$	36 11					$^{\circ}\text{C}/\text{W}$

Notes:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. at 0.375" (9.5 mm) lead lengths with 0.22 x 0.22" (5.5 x 5.5 mm) copper pads.

Ratings and Characteristics Curves

($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

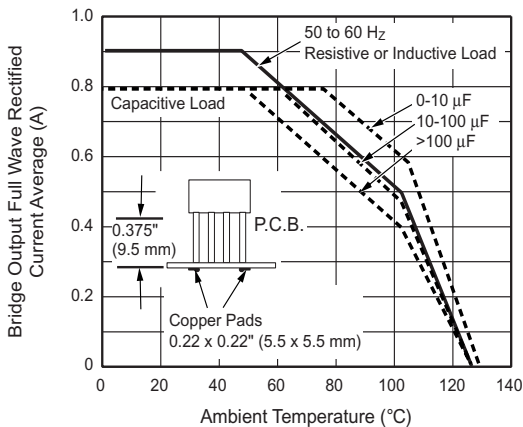


Figure 1. Derating Curves Output Rectified Current for B40C800G...B125C800G

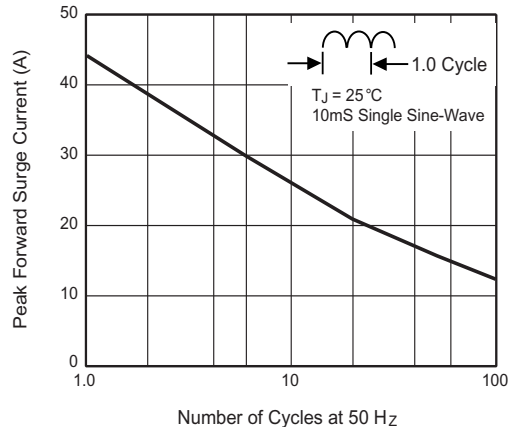


Figure 3. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

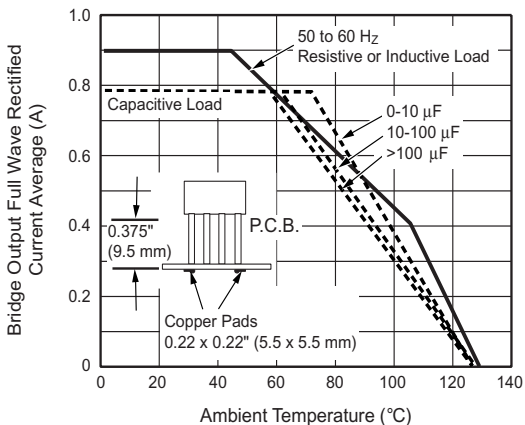


Figure 2. Derating Curves Output Rectified Current for B250C800G...B380C800G

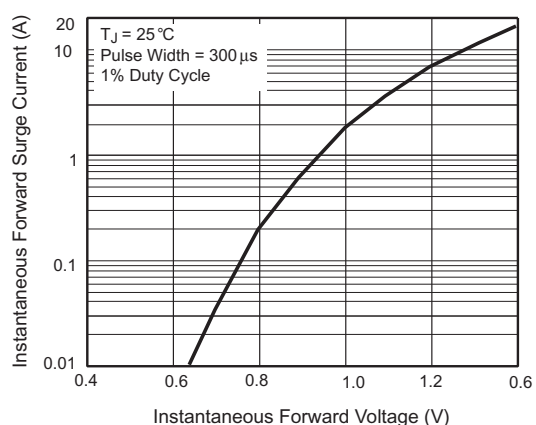


Figure 4. Typical Forward Characteristics Per Leg

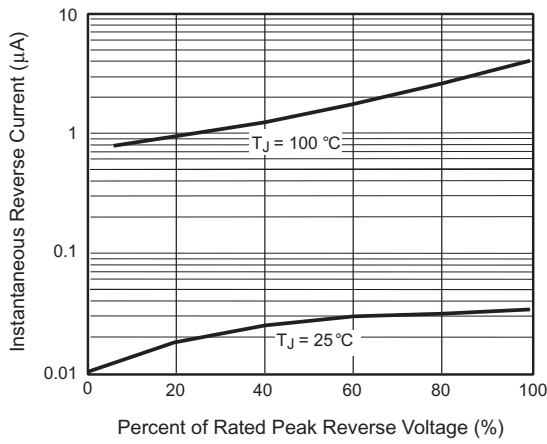


Figure 5. Typical Reverse Characteristics Per Leg


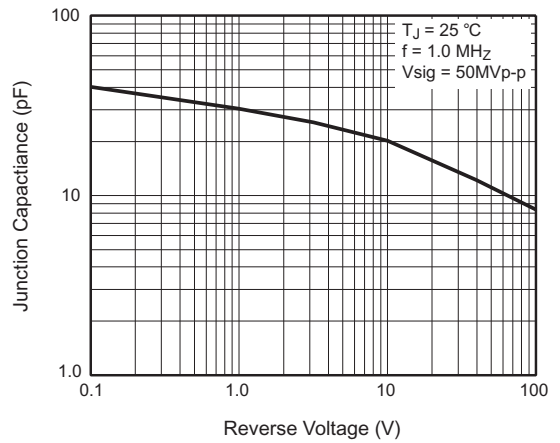


Figure 6. Typical Junction Capacitance Per Leg

Package outline dimensions in inches (millimeters)



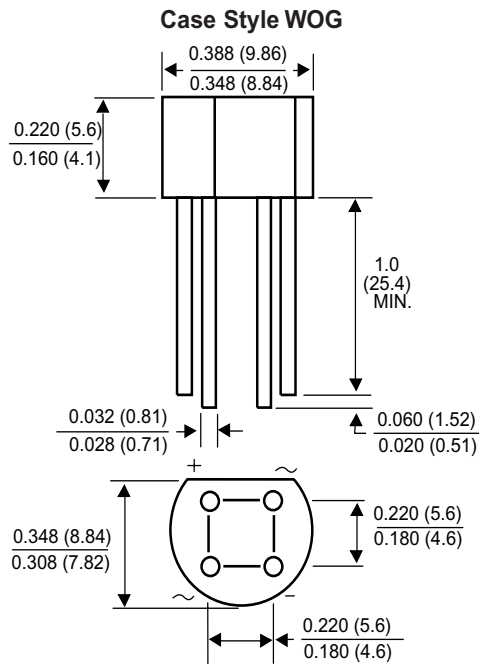

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.