



| REV. | DESCRIPTION | DATE |
|------|-------------|------|
|      |             |      |
|      |             |      |

**Material:**  
 1. Housing: Nylon-6T, UL94V-0.  
 2. Terminal: Copper alloy, Tin-plated.

**Electrical:**  
 1. Current rating : 1A AC,DC.  
 2. Voltage rating : 125V AC,DC.  
 3. Temperature range : -25°C to +85°C.  
 4. Contact resistance: 20mΩ max.  
 5. Insulation resistance: 100MΩ min.  
 6. Withstanding voltage: 250V AC/minute.

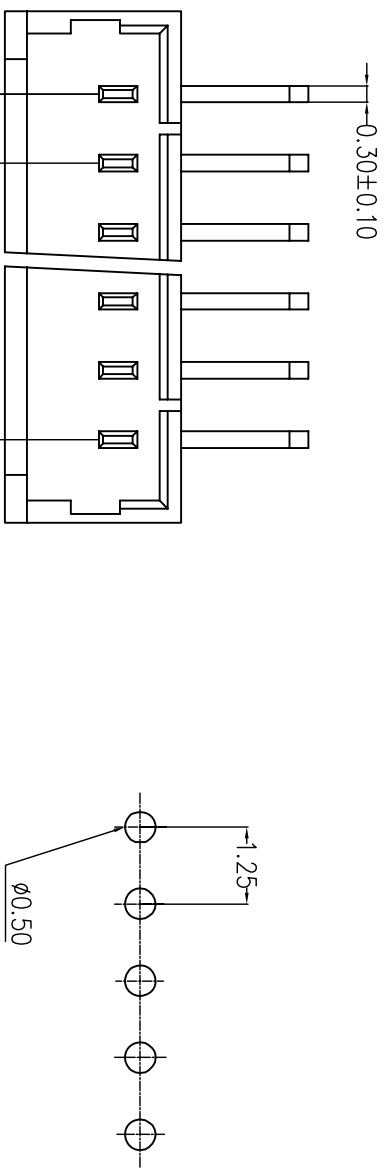

PCB Hole Layout

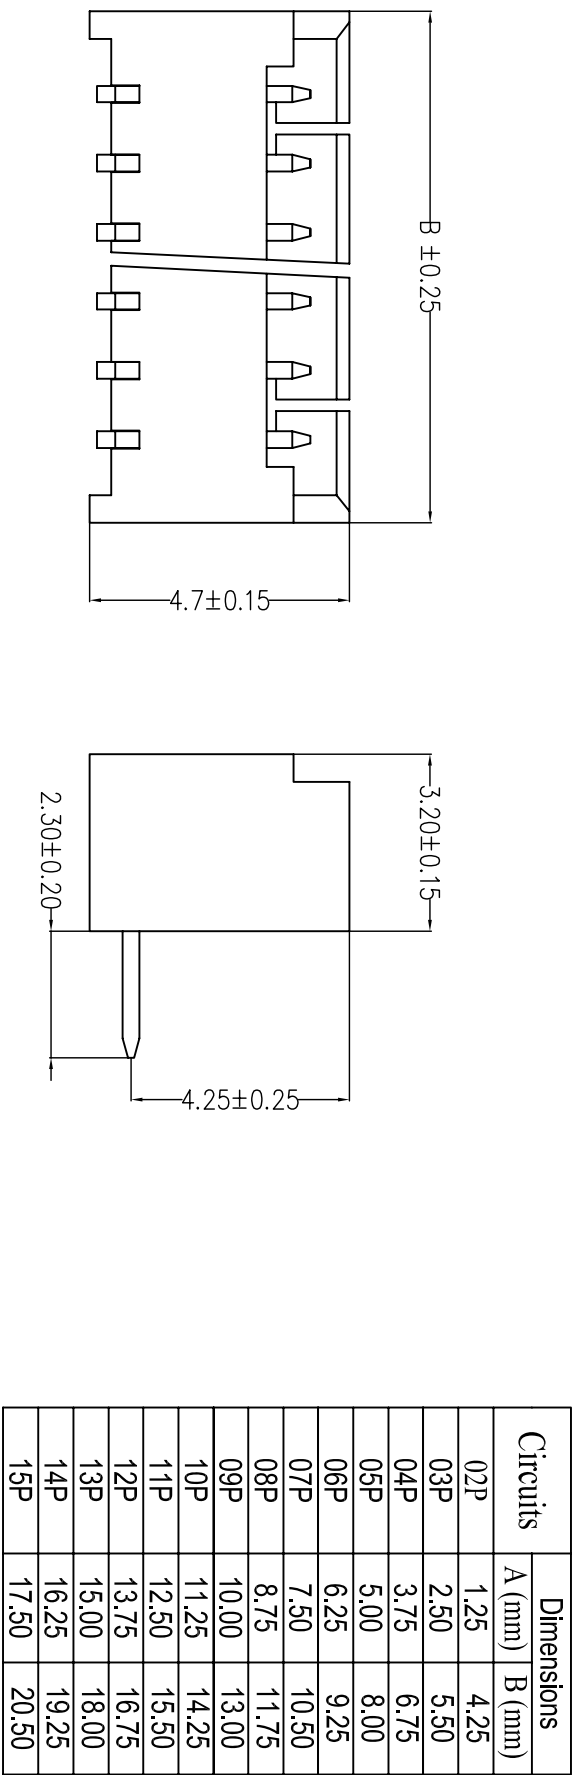

|                                    |  |  |  |
|------------------------------------|--|--|--|
| DRAWER<br><i>Chiu Chuan Siau</i>   |  | TOLERANCE<br>X ±.20<br>XX ±.15<br>XXX ±.10 |  |
| CHECK<br><i>Shi Jeng Siau</i>      |  | UNITS : mm                                 |  |
| DESIGNED<br><i>Chiu Chuan Siau</i> |  | SCALE<br>FREE                              |  |
| APPROVAL<br><i>Shaw Jeng Siau</i>  |  | SIZE<br>A4                                 |  |
| DATE<br>12 / 10 / 2010             |  | PART NO.<br>WTB-P125R-XX                   |  |
| NAME<br>1.25mm Water 90°           |  | DRAW NO.<br>WTB-P125R                      |  |
| SHEET<br>1 OF 1                    |  | REV.<br>A                                  |  |

**SynLight** 日亮電子科技有限公司  
*Sun-light Electronic Technologies Inc.*