

REVISION BI

DO NOT SCALE FROM THIS PRINT

TABLE 1 CONTACT SPECIFICATION

-XX	-S, -D, -T, -P	-S-RA, -P-RA	-D-RA	-T-RA
-01	C-8-1-X	N/A	N/A	N/A
-02	C-8-2-X	C-8-2-X	C-8-2-X C-8-3-X	C-8-2-X C-8-3-X C-8-5-X
-03	C-8-3-X	C-8-3-X	C-8-3-X C-8-5-X	N/A
-04	C-08-5-X	C-08-5-X	N/A	N/A
-06	C-8-6-X	N/A	N/A	N/A
-21	C-17-1-X	N/A	N/A	N/A
-22	C-17-2-X	C-17-2-X	C-17-2-X C-17-3-X	C-17-2-X C-17-3-X C-17-5-X
-23	C-17-3-X	C-17-3-X	C-17-3-X	N/A
-24	C-17-5-X	C-17-5-X	N/A	N/A

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DIMENSIONS ARE IN INCHES
 ONE PLACE DECIMALS ± THREE PLACE DECIMALS ± .005 [.13]
 TWO PLACE DECIMALS ± .01 [.25] FOUR PLACE DECIMALS ± ANGLES ± 2'

TITLE: ASSEMBLY, SOCKET STRIP .016 X .031 TAIL [.41] [.79]
 DWG NO: SSW-1XX-XX-XXX-X-XX-XX-XX
 SHEET 1 OF 2

SSW-1XX-XX-XXX-X-XX-XX-XX


BODY LENGTH SPEC
 -01 THRU -50
 (-P OPTION: 36 POS MAX.)

CONTACT SPECIFICATION
 (SEE TABLE 1)
 -01 THRU -06 (STD. INS. FORCE)
 -21 THRU -24 (LOW INS. FORCE)

PLATING SPECIFICATION
 -G: GOLD- SPECIFY -G IN CONTACT SUFFIX -X
 -T: TIN- SPECIFY -T IN CONTACT SUFFIX -X
 (CONTACT -21 THRU -24 N/A)
 -S: SELECTIVE- SPECIFY -S IN CONTACT SUFFIX -X
 -H: HEAVY- SPECIFY -H IN CONTACT SUFFIX -X
 -E: EXTRA HEAVY- SPECIFY -E IN CONTACT SUFFIX -X
 (CONTACT -01 & -02 STRAIGHT ONLY)
 -F: FLASH SELECTIVE- SPECIFY -F IN CONTACT SUFFIX -X
 -P: GOLD FLASHED PALLADIUM NICKEL- SPECIFY -P IN CONTACT SUFFIX -X
 -STL: SELECTIVE TIN/LEAD- SPECIFY -STL IN TERMINAL SUFFIX -XX
 -TL: TIN/LEAD- SPECIFY -TL IN TERMINAL SUFFIX -X
 (AVAILABLE ONLY ON LEAD STYLES -01.)
 -TM: MATTE TIN SPECIFY -T IN TERMINAL SUFFIX -X
 (CONTACT -21 THRU -24 N/A)
 -SM: HEAVY GOLD SELECTIVE, MATTE TIN TAIL SPECIFY -S IN TERMINAL SUFFIX -X
 -FM: FLASH GOLD SELECTIVE, MATTE TIN TAIL SPECIFY -F IN TERMINAL SUFFIX -X

OPTION
 -LL: LOCKING LEAD (SEE SHEET 2) (N/A IN SINGLE ROW, 1 & 2 POSITION)
POLARIZING OPTION
 INDICATE POS- SEE FIG. 3
OPTION
 -RA: RIGHT ANGLE (SEE FIG. 1) (CONTACT -01 & -21 N/A)

BODY SPECIFICATION
 -S: USE SSW-XX-S
 -D: USE SSW-XX-D
 -T: USE SSW-50-T
 -P: USE SSW-36-P
 -Q: USE SSW-50-T (TRIPLE ROW WITH ONLY 2 OUTER ROWS FILLED)

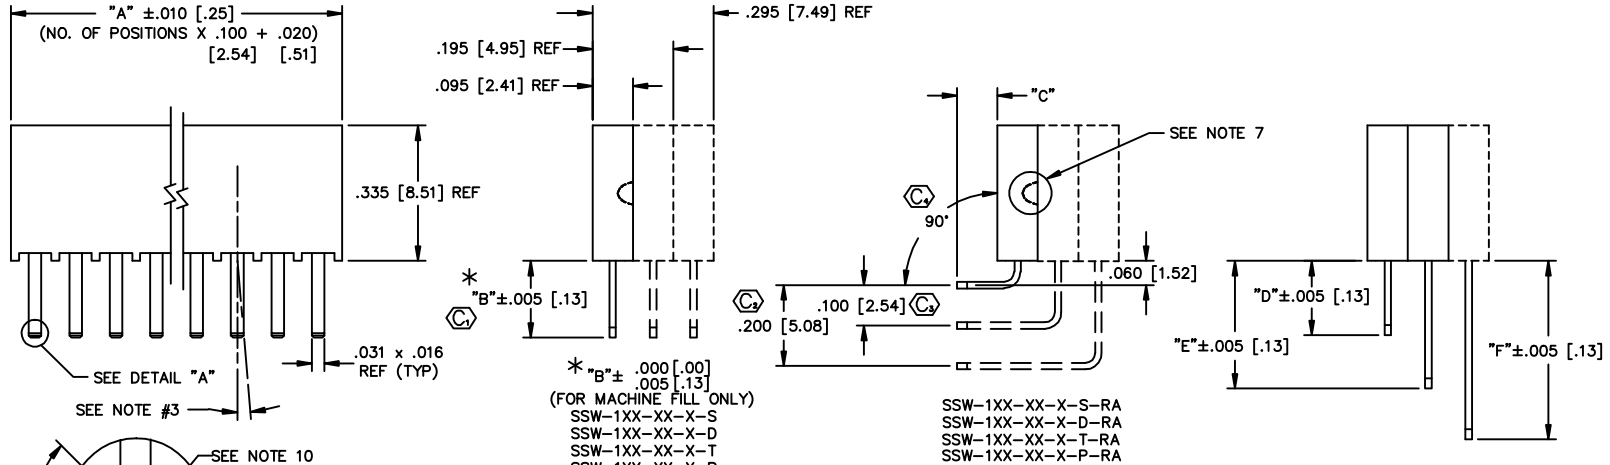

SSW-1XX-XX-X-S-RA
 SSW-1XX-XX-X-D-RA
 SSW-1XX-XX-X-T-RA
 SSW-1XX-XX-X-P-RA

FIG. 1

- NOTES
- CONTACT PUSHOUT FORCE: 1.5 lbs. MIN.
 - MAX ALLOWABLE BOW: .003 INCH/INCH.
 - MAX ALLOWABLE SWAY: 2' (TYP) FOR HAND FILL & 1' (TYP) FOR MACHINE FILL.
 - MAX ALLOWABLE VARIATION BETWEEN PIN ROWS: .010
 - "END WALLS" AFTER CUTTING SHOULD BE .020±.003.
 - (C) REPRESENTS CRITICAL DIMENSION.
 - NOTCH ON -P-RA OPTION TO BE ORIENTED AS SHOWN.
 - MAX CUT FLASH: .015 WITH NO FLASH BELOW STANDOFFS OR IN CONTACT HOLES.
 - SHEAR LOCATION TO BE WITHIN .001" [.03] OF THE BREAK OFF CENTER LOCATION.
 - SHEAR LOCATION TO BE WITHIN .001" [.03] OF THE BREAK OFF CENTER LOCATION FOR MACHINE FILL.

IN-PROCESS	"D"	"E"	"F"
SSW-1XX-X2-X-D-RA	.194 [4.93]	.394 [10.01]	-----
SSW-1XX-03-X-D-RA	.394 [10.01]	.594 [15.09]	-----
SSW-1XX-02-X-T-RA	.194 [4.93]	.394 [10.01]	.594 [15.09]

TABLE 2

CONTACT	"B"		"C" REF		
	-S(-RA), -D, -T	-S-RA	-D-RA	-T-RA	
-01, -21	.104 [2.64]	N/A	N/A	N/A	
-02, -22	.194 [4.93]	.100 [2.54]	.100 [2.54]	.100 [2.54]	
-03, -23	.394 [10.01]	.300 [7.62]	.300 [7.62]		
-04, -24	.584 [14.83]	.490 [12.45]	N/A	N/A	
-06	.124 [3.15]	N/A	N/A	N/A	

MATERIAL:

INSULATORS:
 FLAMMABILITY RATING UL94 V-0
 SINGLE
 PRIMARY MATERIAL: LCP
 COLOR: BLACK

TRIPLE ROW MATERIAL: PCT
 COLOR: BLACK

TERMINAL:
 PHOSPHOR BRONZE, SPRING TEMPER, ALLOY 511 OR 510
 (TENSILE STRENGTH 90-100 KSI)
 (YIELD STRENGTH @ 2% OFFSET 88-98 KSI) PER MIL-B-13501
 THICKNESS: .0250±.001 [.635±.03]

Samtec
 520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY: PURVIS 6-12-87
 SSW-1XX-XX-XXX-X-XX-XX-XX
 SHEET 1 OF 2

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.