



UF640

Power MOSFET

18 A, 200 V, 0.18 OHM, N-CHANNEL POWER MOSFET

DESCRIPTION



These kinds of n-channel power mos field effect transistor have low conduction power loss, high input impedance, and high switching speed, Linear Transfer Characteristics, so can be use in a variety of power conversion applications.

The **UF640** suitable for resonant and PWM converter topologies.

FEATURES

- * $R_{DS(ON)} = 0.18\Omega @ V_{GS} = 10V$.
- * Ultra Low gate charge (typical 43nC)
- * Low reverse transfer capacitance ($C_{RSS} =$ typical 100 pF)
- * Fast switching capability
- * Avalanche energy specified
- * Improved dv/dt capability, high ruggedness

SYMBOL

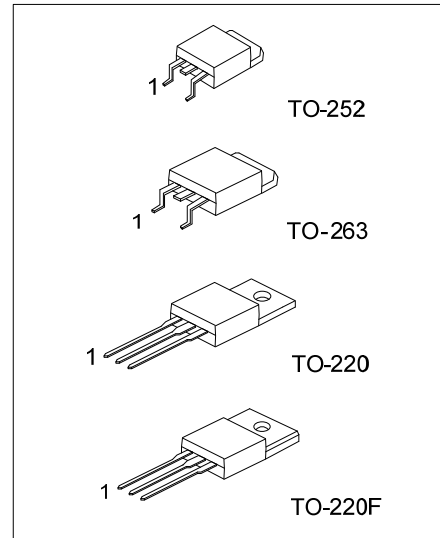

Lead-free: UF640L

Halogen-free: UF640G

ORDERING INFORMATION

| Ordering Number | | | Package | Pin Assignment | | | Packing |
|-----------------|--------------|--------------|---------|----------------|---|---|-----------|
| Normal | Lead Free | Halogen-Free | | 1 | 2 | 3 | |
| UF640-TA3-T | UF640L-TA3-T | UF640G-TA3-T | TO-220 | G | D | S | Tube |
| UF640-TF3-T | UF640L-TF3-T | UF640G-TF3-T | TO-220F | G | D | S | Tube |
| UF640-TN3-R | UF640L-TN3-R | UF640G-TN3-R | TO-252 | G | D | S | Tape Reel |
| UF640-TN3-T | UF640L-TN3-T | UF640G-TN3-T | TO-252 | G | D | S | Tube |
| UF640-TQ2-R | UF640L-TQ2-R | UF640G-TQ2-R | TO-263 | G | D | S | Tape Reel |
| UF640-TQ2-T | UF640L-TQ2-T | UF640G-TQ2-T | TO-263 | G | D | S | Tube |

| | |
|--|---|
| <p>UF640L-TA3-T</p> <p>(1)Packing Type (2)Package Type (3)Lead Plating</p> | <p>(1) R: Tape Reel, T: Tube (2) TA3: TO-220, TF3: TO-220F, TN3: TO-252 TQ3: TO-263 (3) G: Halogen Free, L: Lead Free, Blank: Pb/Sn</p> |
|--|---|

■ ABSOLUTE MAXIMUM RATING (T_C = 25°C, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|---|---------|------------------|------------|------|
| Drain-Source Voltage | | V _{DSS} | 200 | V |
| Drain-Gate Voltage (R _{GS} =20kΩ) | | V _{DGR} | 200 | V |
| Gate-Source Voltage | | V _{GSS} | ±20 | V |
| Continuous Drain Current | | I _D | 18 | A |
| Pulsed Drain Current (Note 2) | | I _{DM} | 72 | A |
| Single Pulse Avalanche Energy Rating (Note 2) | | E _{AS} | 580 | mJ |
| Maximum Power Dissipation | TO-220 | P _D | 123 | W |
| | TO-220F | | 40 | |
| | TO-252 | | 83 | |
| | TO-263 | | 139 | |
| Junction Temperature | | T _J | +150 | °C |
| Storage Temperature | | T _{STG} | -55 ~ +150 | °C |

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. L=3.37mH, V_{DD}=50V, R_G=25Ω, peak I_{AS}=18A, starting T_J=25°C.

3. Pulse width limited by T_{J(MAX)}


■ THERMAL DATA

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|---------------------|---------|-----------------|---------|------|
| Junction-to-Ambient | TO-220 | θ _{JA} | 62.5 | °C/W |
| | TO-220F | | 62.5 | |
| | TO-252 | | 110 | |
| | TO-263 | | 62.5 | |
| Junction-to-Case | TO-220 | θ _{JC} | 1.01 | °C/W |
| | TO-220F | | 3.1 | |
| | TO-252 | | 1.5 | |
| | TO-263 | | 0.9 | |

■ ELECTRICAL CHARACTERISTICS (T_C = 25°C, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------------|----------------------|---|-----|------|------|------|
| OFF CHARACTERISTICS | | | | | | |
| Drain-Source Breakdown Voltage | BV _{DSS} | I _D =250μA, V _{GS} =0V | 200 | | | V |
| Drain-Source Leakage Current | I _{DSS} | V _{DS} = Rated BV _{DSS} , V _{GS} = 0V | | | 25 | μA |
| Gate-Source Leakage Current | I _{GSS} | V _{GS} = ±20V | | | ±100 | nA |
| ON CHARACTERISTICS | | | | | | |
| Gate Threshold Voltage | V _{GS(THR)} | V _{GS} =V _{DS} , I _D =250μA | 2 | | 4 | V |
| On-State Drain Current | I _{D(ON)} | V _{DS} > I _{D(ON)} × R _{DS(ON)} MAX, V _{GS} =10V | 18 | | | A |
| Drain-Source On Resistance | R _{DS(ON)} | I _D =10A, V _{GS} =10V | | 0.14 | 0.18 | Ω |
| DYNAMIC PARAMETERS | | | | | | |
| Input Capacitance | C _{ISS} | V _{DS} =25V, V _{GS} =0V, f=1MHz | | 1275 | | pF |
| Output Capacitance | C _{OSS} | | | 400 | | pF |
| Reverse Transfer Capacitance | C _{RSS} | | | 100 | | pF |
| SWITCHING PARAMETERS | | | | | | |
| Turn-ON Delay Time | t _{D(ON)} | V _{DD} =100V, I _D ≈18A, R _G =9.1Ω, R _L =5.4Ω, MOSFET Switching Times are Essentially Independent of Operating Temperature | | 13 | 21 | ns |
| Turn-ON Rise Time | t _r | | | 50 | 77 | ns |
| Turn-OFF Delay Time | t _{D(OFF)} | | | 46 | 68 | ns |
| Turn-OFF Fall-Time | t _f | | | 35 | 54 | ns |
| Total Gate Charge | Q _{G(TOT)} | V _{GS} =10V, I _D ≈18A, V _{DS} =0.8 x Rated BV _{DSS} Gate Charge is Essentially Independent of Operating Temperature I _{G(REF)} = 1.5mA | | 43 | 64 | nC |
| Gate Source Charge | Q _{GS} | | | 8 | | nC |
| Gate Drain Charge | Q _{GD} | | | 22 | | nC |

■ ELECTRICAL CHARACTERISTICS(Cont.)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|----------|--|---|-----|-----|---------------|
| Internal Drain Inductance | L_D | Measured From the Contact Screw on Tab to Center of Die | | 3.5 | | nH |
| | | Measured From the Drain Lead, 6mm (0.25in) From Package to Center of Die | Modified MOSFET Symbol Showing the Internal Devices Inductances | | 4.5 | |
| Internal Source Inductance | L_S | Measured From the Source Lead, 6mm (0.25in) from Header to Source Bonding Pad | | 7.5 | | nH |
| SOURCE TO DRAIN DIODE SPECIFICATIONS | | | | | | |
| Diode Forward Voltage (Note) | V_{SD} | $T_J = 25^\circ\text{C}$, $I_S = 18\text{A}$, $V_{GS} = 0\text{V}$, | | | 2.0 | V |
| Continuous Source Current (body diode) | I_S | Integral Reverse p-n Junction Diode in the MOSFET | | | 18 | A |
| Pulse Source Current (body diode) (Note) | I_{SM} |  | | | 72 | A |
| Reverse Recovery Time | t_{RR} | $T_J = 25^\circ\text{C}$, $I_S = 18\text{A}$, $dI_S/dt = 100\text{A}/\mu\text{s}$ | 120 | 240 | 530 | ns |
| Reverse Recovery Charge | Q_{RR} | $T_J = 25^\circ\text{C}$, $I_S = 18\text{A}$, $dI_S/dt = 100\text{A}/\mu\text{s}$ | 1.3 | 2.8 | 5.6 | μC |

Note: Pulse Test: Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

TEST CIRCUIT

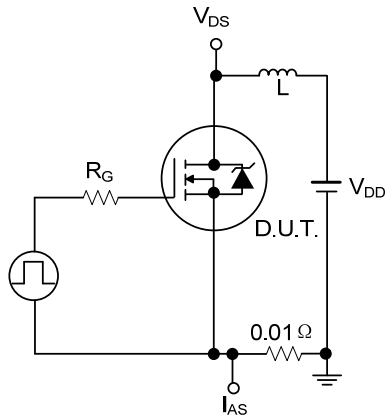


Figure 1A. Unclamped Energy Test Circuit

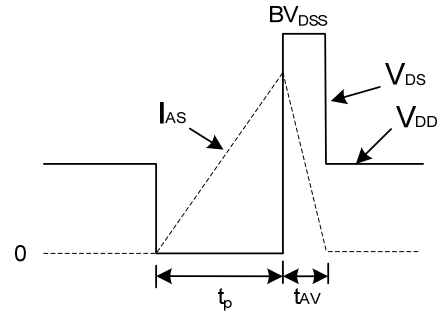


Figure 1B. Unclamped Energy Waveforms

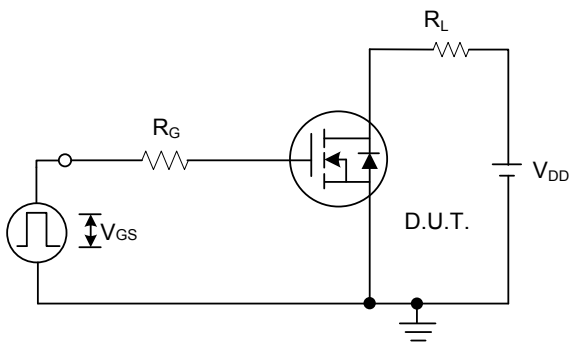


Figure 2A. Switching Time Test Circuit

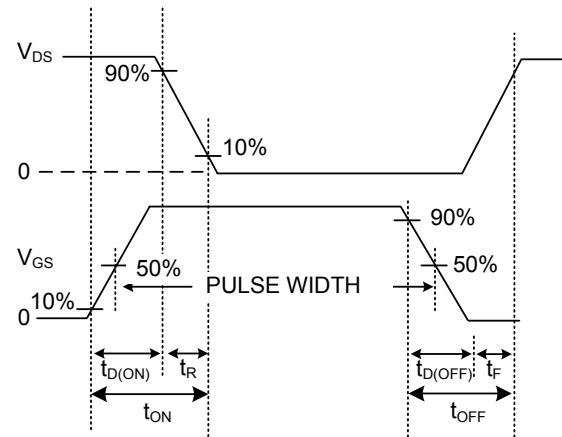


Figure 2B. Resistive Switching Waveforms

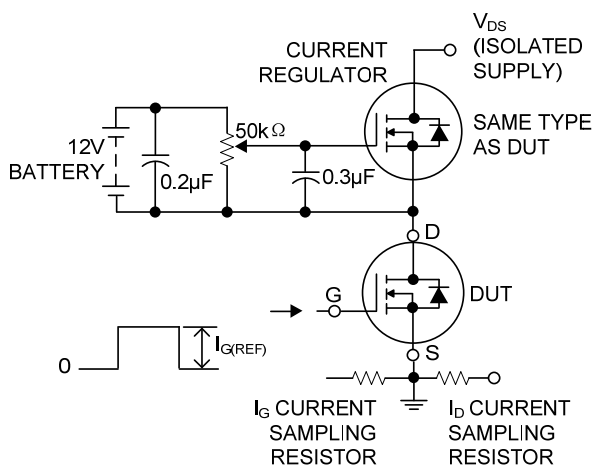


Figure 3A. Gate Charge Test Circuit



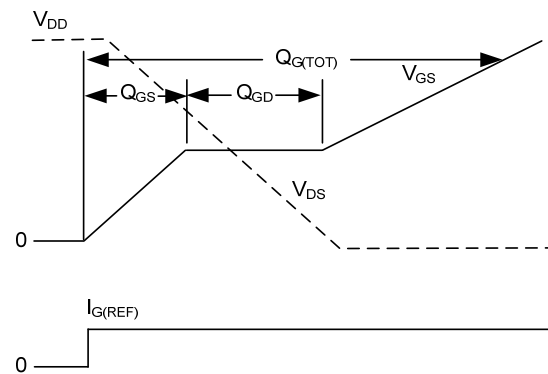


Figure 3B. Gate Charge Waveforms

■ TYPICAL CHARACTERISTICS

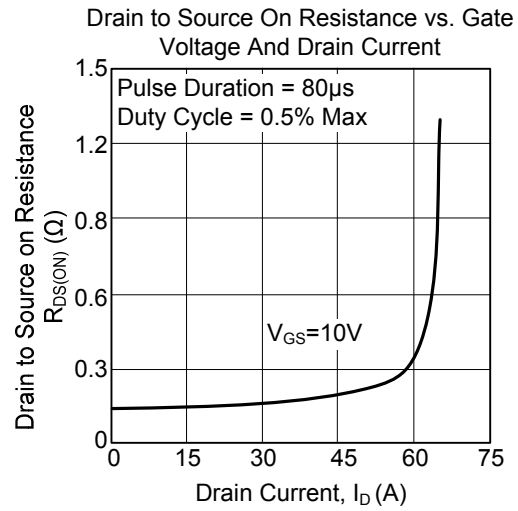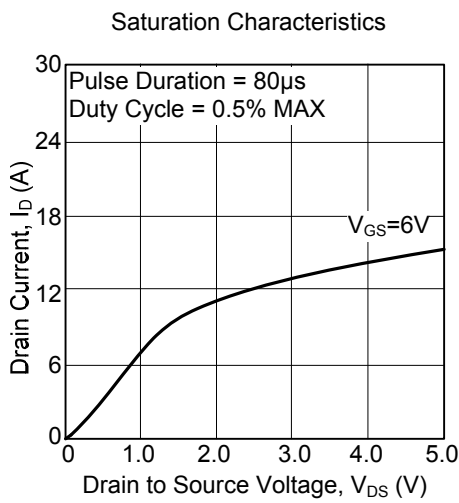

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.