




# HSB220 thru HSB2100

Schottky Barrier Rectifiers  
(Reverse Voltage 20 to 100V, Forward Current 2A)

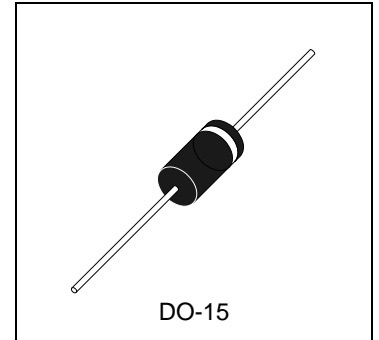

## Features

- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

## Mechanical Data







- Cases: DO-15 molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- High temperature soldering guaranteed: 250°C/10seconds/.375"(9.5mm) lead lengths at 5lbs.,(2.3kg) tension
- Weight: 0.4 gram

## Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load. Derate current by 20%.

Ratings	Symbol	HSB 220	HSB 230	HSB 240	HSB 250	HSB 260	HSB 280	HSB 2100	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	V
Surge Peak Reverse Voltage	$V_{RSM}$	14	21	28	35	42	57	71	V
DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	V
Average Forward Rectified Current ( $T_A=75^\circ\text{C}$ )	$I_{FAV}$	2							A
Peak Forward Surge Current, 50Hz Half Sine-wave ( $T_A=25^\circ\text{C}$ )	$I_{FSM}$	50							A
Repetitive Peak Forward C ( $f>15\text{Hz}$ )	$I_{FRM}$	12							A
Instantaneous Forward Voltage	$V_F$	0.48	0.52	0.65			0.8	V	
Leakage Current ( $T_J=25^\circ\text{C}$ , $V_R=V_{RRM}$ )	$I_R$	0.1							mA
Leakage Current ( $T_J=100^\circ\text{C}$ , $V_R=V_{RRM}$ )		10							mA
Typical Junction Capacitance	$C_J$	170							pF
Rating for Fusing, $t<10\text{ms}$ ( $T_A=25^\circ\text{C}$ )	$i^2t$	12.5							$\text{A}^2\text{s}$
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	50							$^\circ\text{C/W}$
Thermal Resistance Junction to Lead	$R_{\theta JL}$	15							$^\circ\text{C/W}$
Operating Junction Temperature Range	$T_J$	-65 to +125							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150							$^\circ\text{C}$
ESD Protection Voltage	$V_{ESD}$	<8							KV

## Characteristics Curve

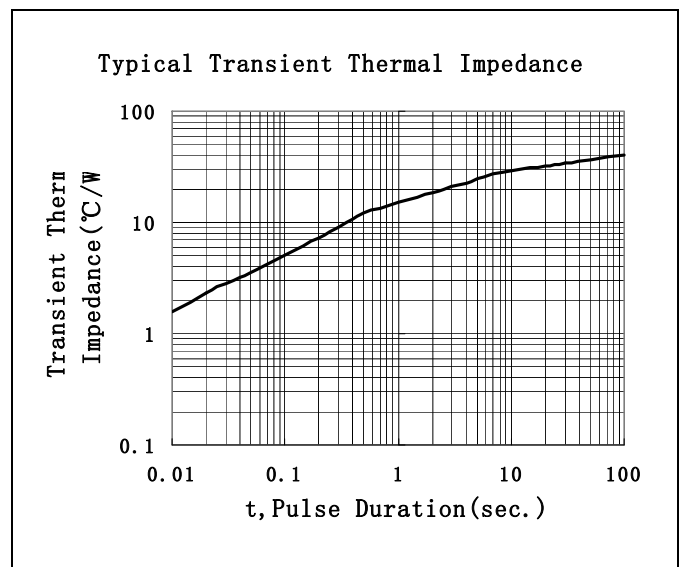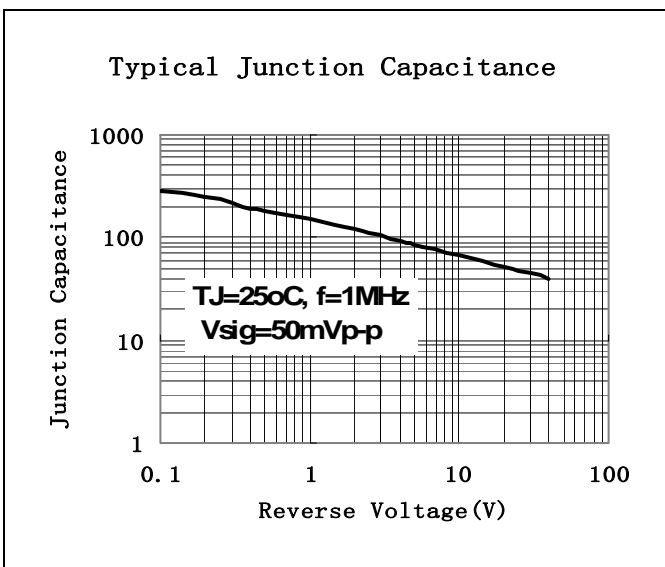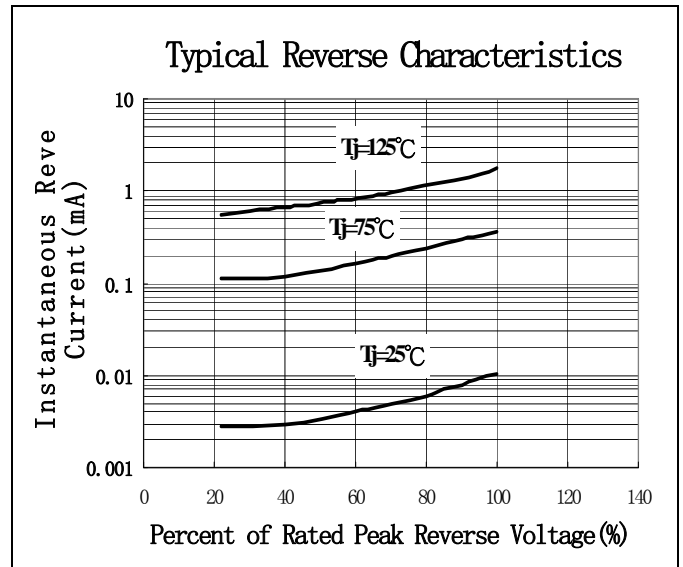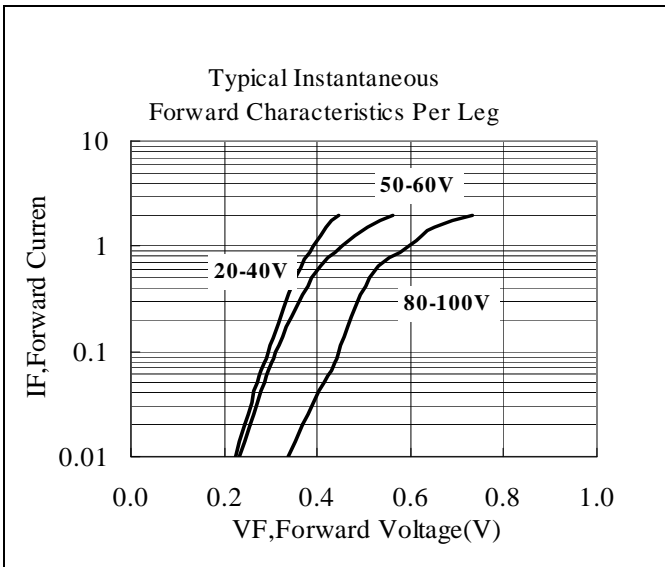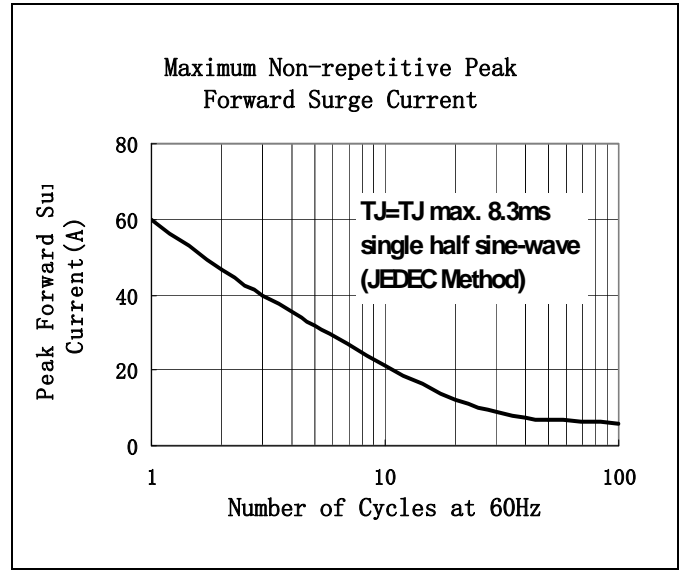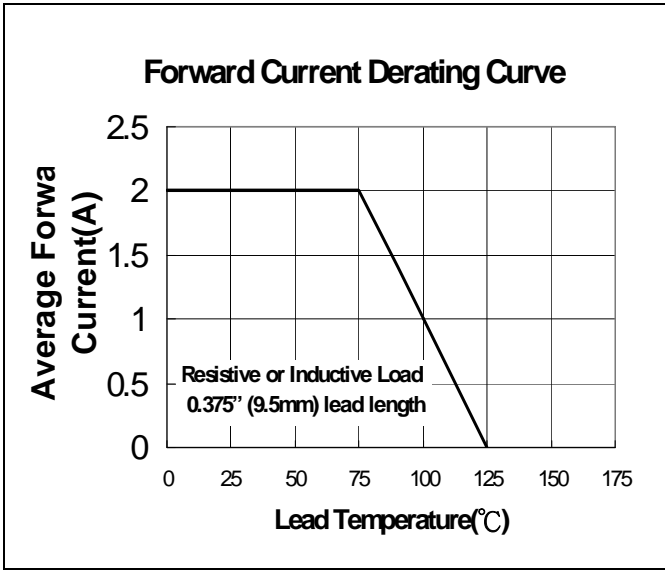



### DO-15 Dimension

2-Lead DO-15 Molded Plastic Package  
HSMC Package Code: L

**Marking:**

Pb Free Mark  
Pb-Free: \* ● (None)  
Normal: None

Control Code

Date Code

HSB 2

Product Series  
20,30,40,50,60,80,100

Marking around the surface of cylinder

Note:  
Green label is used for pb-free packing

DIM	Min.	Max.
A	0.70	0.90
B	25.40	-
C	5.80	7.60
D	25.40	-
E	2.60	3.60

Unit: mm

#### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

#### Head Office And Factory:

- **Head Office** (Hi-Sincerity Microelectronics Corp.): 10F.,No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.  
Tel: 886-2-25212056 Fax: 886-2-25632712
- **Factory 1:** No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C  
Tel: 886-3-5983621~5 Fax: 886-3-5982931