


## Features

- High-speed:  $t_{PD} = 1.8\text{ns}$  typical
- Broad operating range:  $V_{CC} = 1.8\text{V} - 3.6\text{V}$
- Power down high-impedance inputs/outputs
- High output drive:  $\pm 24\text{mA}$  at  $3\text{V}$   $V_{CC}$
- Packaging (Pb-free & Green available):
  - 5-pin SOT23 (T)
  - 5-pin SC70 (C)


## Pin Configuration

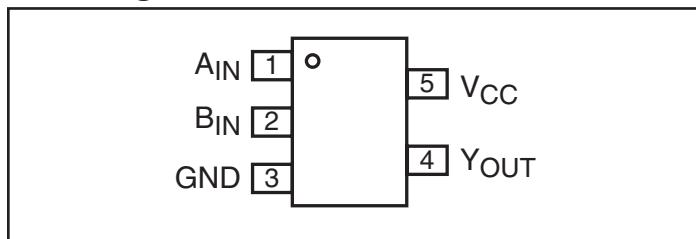

## Description

The PI74ST1G08 is a 2-Input AND Gate that operates over the 1.8V to 3.6V  $V_{CC}$  operating range.

## Block Diagram

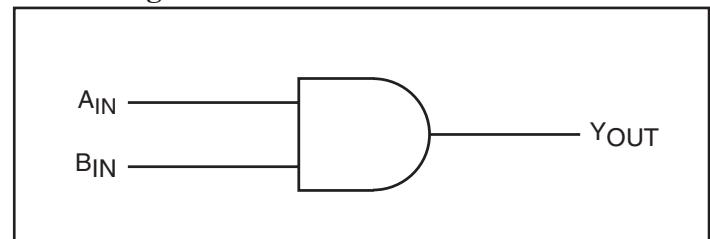

## Pin Description

Pin Name	Description
A <sub>IN</sub>	Input
B <sub>IN</sub>	Input
Y <sub>OUT</sub>	Output

## Function Table

Inputs		Outputs
A <sub>IN</sub>	B <sub>IN</sub>	Y <sub>OUT</sub>
L	L	L
L	H	L
H	L	L
H	H	H

## Notes:

H = HIGH Logic Level  
L = LOW Logic Level

## Recommended Operating Conditions<sup>(1)</sup>

Parameter	Condition	Min.	Max.	Units
Supply Voltage ( $V_{CC}$ )		1.8	3.6	
Input Voltage ( $V_{IN}$ )		0	5.5	V
Output Voltage ( $V_{OUT}$ )		0	$V_{CC}$	
Operating Temperature		-40	85	°C
Input Rise and Fall Time ( $t_r, t_f$ )	$V_{CC} = 1.8\text{V}, 2.5\text{V} \pm 0.2\text{V}$	0	20	ns/V
	$V_{CC} = 3.3\text{V} \pm 0.3\text{V}$	0	10	

## Notes:

1. Unused inputs must be held HIGH or LOW. They may not float.

## Absolute Maximum Ratings

Supply Voltage (V <sub>CC</sub> ) .....	-0.5V to +4V
DC Input Voltage (V <sub>IN</sub> ) .....	-0.5V to +6V
DC Output Voltage (V <sub>OUT</sub> ) .....	-0.5V to +6V
DC Input Diode Current (I <sub>IK</sub> ) .....	-50mA to 20mA
DC Output Diode Current (I <sub>OK</sub> ) .....	-50mA to 20mA
DC Output Current (I <sub>OUT</sub> ) .....	±50mA
DC V <sub>CC</sub> /GND Current (I <sub>CC</sub> /I <sub>GND</sub> ) .....	±50mA
Storage Temperature (T <sub>STG</sub> ) .....	-65°C to +150°C
Junction Lead Temperature (IOS) .....	200°C
Power Dissipation SOT23 .....	200mW
SC70 .....	150mW

**Note:**

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

## DC Electrical Characteristics (Over supply voltage and operating temperature ranges, unless otherwise specified)

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40° C to +85° C		Units		
				Min.	Typ.	Max.	Min.	Max.			
V <sub>IH</sub>	HIGH Level Input Voltage	1.8 2.3-3.6		0.75V <sub>CC</sub> 0.70V <sub>CC</sub>			0.75V <sub>CC</sub> 0.70V <sub>CC</sub>		V		
V <sub>IL</sub>	LOW Level Input Voltage	1.8 2.3-3.6					0.25V <sub>CC</sub> 0.30V <sub>CC</sub>				
V <sub>OH</sub>	HIGH Level Output Voltage	1.8 2.3 3.0	V <sub>IN</sub> = V <sub>IH</sub>	I <sub>OH</sub> = -100μA	1.7	1.79		1.7			
		2.3			2.2	2.29		2.2			
		3.0			2.9	2.99		2.9			
	LOW Level Output Voltage	2.3 3.0 3.0	V <sub>IN</sub> = V <sub>IL</sub>	I <sub>OH</sub> = -8mA I <sub>OH</sub> = -16mA I <sub>OH</sub> = -24mA	1.9	2.13		1.9			
		3.0			2.4	2.71		2.4			
		3.0			2.3	2.55		2.3			
V <sub>OL</sub>	LOW Level Output Voltage	1.8 2.3 3.0	V <sub>IN</sub> = V <sub>IL</sub>	I <sub>OL</sub> = 100μA		0.01	0.1		0.1		
		2.3				0.01	0.1		0.1		
		3.0				0.00	0.1		0.1		
		2.3 3.0 3.0		I <sub>OH</sub> = 8mA I <sub>OH</sub> = 16mA I <sub>OH</sub> = 24mA		0.10	0.3		0.3		
		3.0				0.18	0.4		0.4		
		3.0				0.28	0.55		0.55		
I <sub>IN</sub>	Input Leakage Current	0-3.6	V <sub>IN</sub> = 5.5V, GND		-1		1	-1	1	μA	
I <sub>OFF</sub>	Power Off Leakage Current	0.0	V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V		-1		1	-1	1		
I <sub>CC</sub>	Quiescent Supply Current	1.8-3.6	V <sub>IN</sub> = 5.5V, GND			2.0			20		

### AC Electrical Characteristics

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40° C to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max		
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay	1.8 2.5±0.2 3.3±0.3	C <sub>L</sub> = 15pF, R <sub>L</sub> = 1MΩ	2.2 0.8 0.5	3.0 1.9 1.3	4.0 2.6 2.2	2.0 0.8 0.5	4.4 2.8 2.5	ns	1 3
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay	3.3±0.3	C <sub>L</sub> = 50pF, R <sub>L</sub> = 500Ω	1.5	2.9	3.8	1.5	4.2		1 3
C <sub>IN</sub>	Input Capacitance	V <sub>IN</sub> = 0			4					
C <sub>PD</sub> <sup>(1)</sup>	Power Dissipation Capacitance	3.3	Note 3		20				pF	2

#### Notes:

- CPD is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle (see Figure 2). CPD is related to I<sub>CCD</sub> dynamic operating current by the expression:  
 $I_{CCD} = (C_{PD})(V_{CC})(f_{IN}) + (I_{CC\ static})$ .

### AC Loading and Waveforms

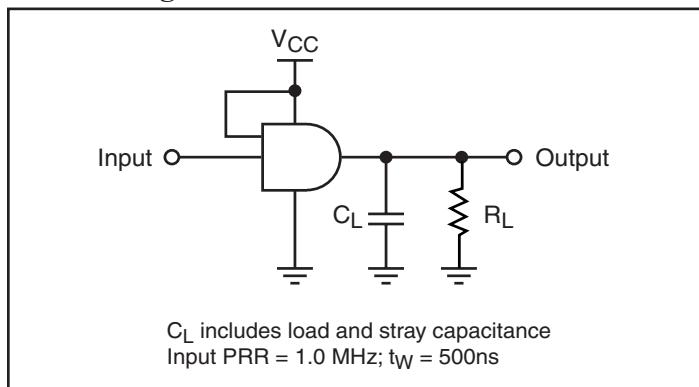


Figure 1. AC Test Circuit

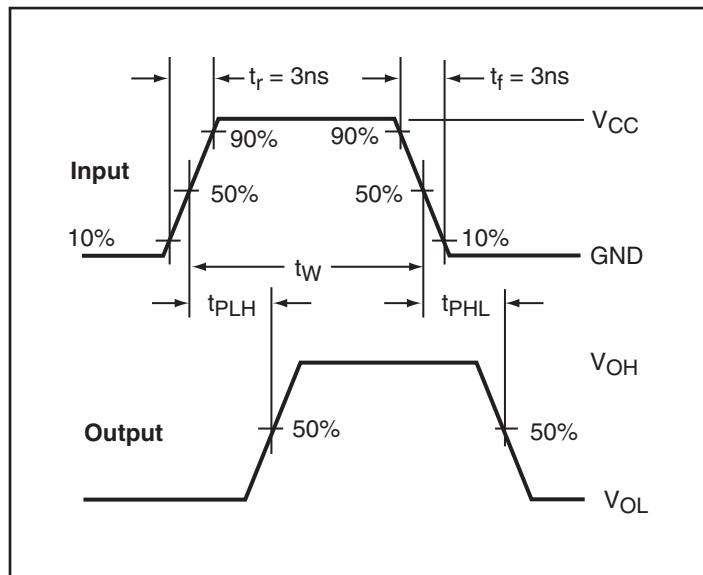


Figure 3. AC Waveforms



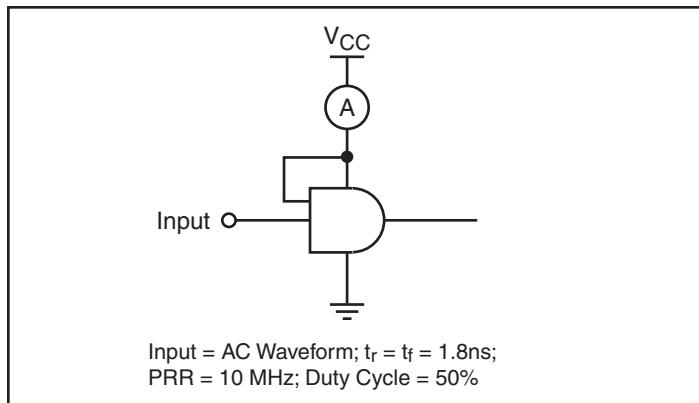


Figure 2. I<sub>CCD</sub> Test Circuit

### Packaging Mechanical: 5-Pin SOT23 (T)

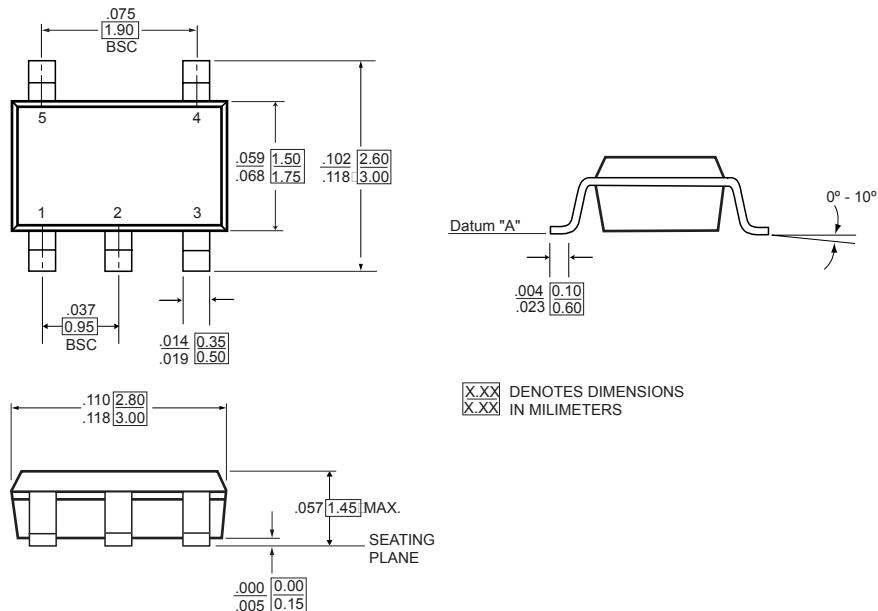

### Packaging Mechanical: 5-Pin SC70 (C)

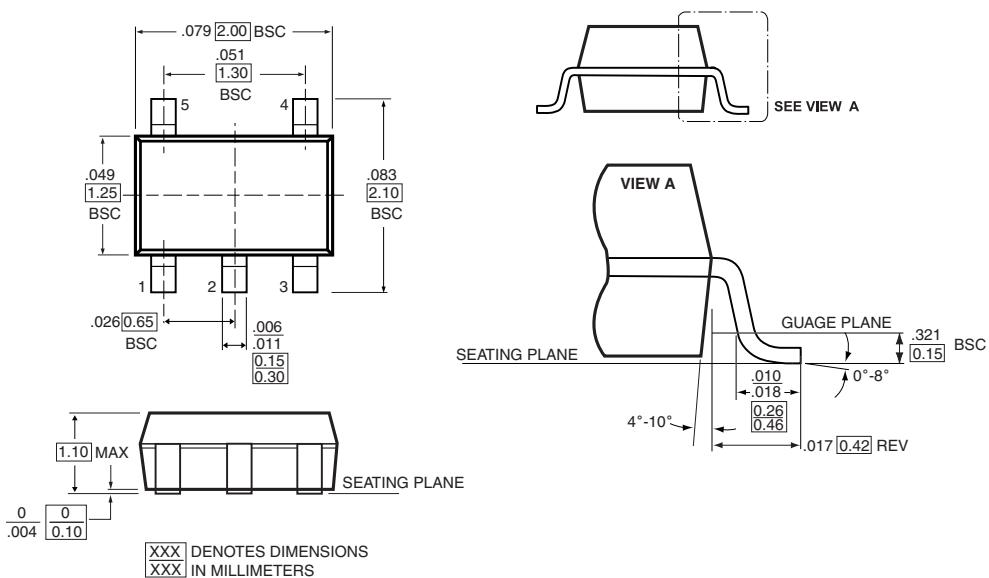

**Ordering Information**

Ordering Code	Package Code	Package Description	Top Marking
PI74ST1G08TX	T	5-pin SOT23	A8
PI74ST1G08TEX	T	Pb-free & Green, 5-pin SOT23	A8
PI74ST1G08CE	C	Pb-free & Green, 5-pin SC70	A8
PI74ST1G08CX	C	5-pin SC70	A8
PI74ST1G08CEX	C	Pb-free & Green, 5-pin SC70	A8

**Notes:**

- Thermal characteristics can be found on the company web site at [www.pericom.com/packaging/](http://www.pericom.com/packaging/)
- E = Pb-free and Green
- X Suffix = Tape and Reel