


2.0mm SINGLE ROW HEADER RIGHT ANGLE P.C.B. MOUNT TYPE

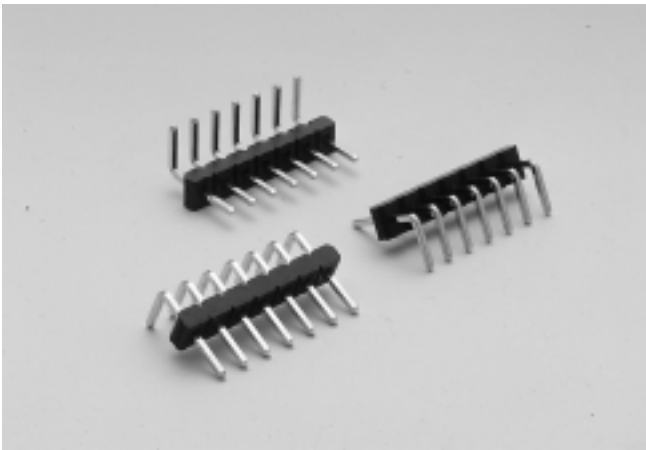


200110MR Series

Mates With SUYIN 200123, 200130, 200160 Series

Specifications:

- **2-40 Circuits**
- **Insulator Material** : Black High Temp . Plastic
- **Operating Temp. Range** : -40°C to +105°C
- **Terminal Material** : Brass 65/35
- **Plating** : Contact-Selective Gold Plated
or Full Gold Plated
- **Max. Current Rating** : 1.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

2.0
mm

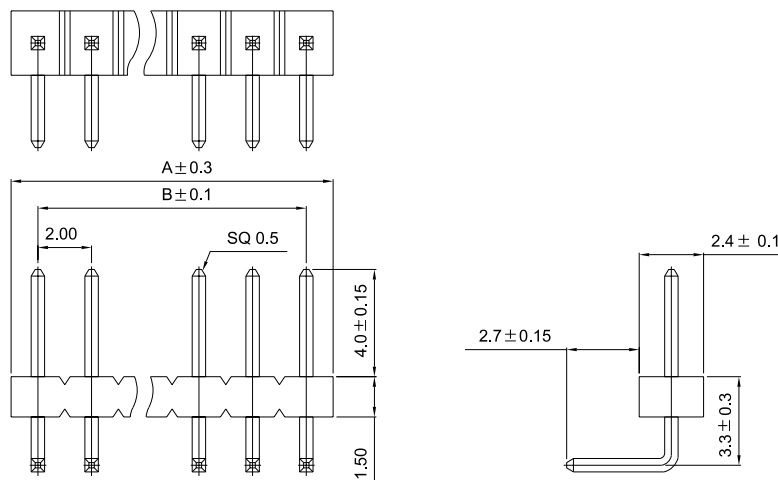

Order Information

200110MR□□□□□00Z□
1 2 3 4 5

1. 'R' : Right Angle DIP Type

2. No. of Pins

3. Plating

4. Color 'Z' : Black

5. Package

'O' : Slim Box Package Without
CAP

Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200110MR002□□□□00Z□	4.3	2.0	200110MR022□□□□00Z□	44.3	42.0
200110MR003□□□□00Z□	6.3	4.0	200110MR023□□□□00Z□	46.3	44.0
200110MR004□□□□00Z□	8.3	6.0	200110MR024□□□□00Z□	48.3	46.0
200110MR005□□□□00Z□	10.3	8.0	200110MR025□□□□00Z□	50.3	48.0
200110MR006□□□□00Z□	12.3	10.0	200110MR026□□□□00Z□	52.3	50.0
200110MR007□□□□00Z□	14.3	12.0	200110MR027□□□□00Z□	54.3	52.0
200110MR008□□□□00Z□	16.3	14.0	200110MR028□□□□00Z□	56.3	54.0
200110MR009□□□□00Z□	18.3	16.0	200110MR029□□□□00Z□	58.3	56.0
200110MR010□□□□00Z□	20.3	18.0	200110MR030□□□□00Z□	60.3	58.0
200110MR011□□□□00Z□	22.3	20.0	200110MR031□□□□00Z□	62.3	60.0
200110MR012□□□□00Z□	24.3	22.0	200110MR032□□□□00Z□	64.3	62.0
200110MR013□□□□00Z□	26.3	24.0	200110MR033□□□□00Z□	66.3	64.0
200110MR014□□□□00Z□	28.3	26.0	200110MR034□□□□00Z□	68.3	66.0
200110MR015□□□□00Z□	30.3	28.0	200110MR035□□□□00Z□	70.3	68.0
200110MR016□□□□00Z□	32.3	30.0	200110MR036□□□□00Z□	72.3	70.0
200110MR017□□□□00Z□	34.3	32.0	200110MR037□□□□00Z□	74.3	72.0
200110MR018□□□□00Z□	36.3	34.0	200110MR038□□□□00Z□	76.3	74.0
200110MR019□□□□00Z□	38.3	36.0	200110MR039□□□□00Z□	78.3	76.0
200110MR020□□□□00Z□	40.3	38.0	200110MR040□□□□00Z□	80.3	78.0
200110MR021□□□□00Z□	42.3	40.0			

Recommended P.C.B Layout

