


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/06/10	

APPROVED: _____
 DATE: _____ TITLE: _____

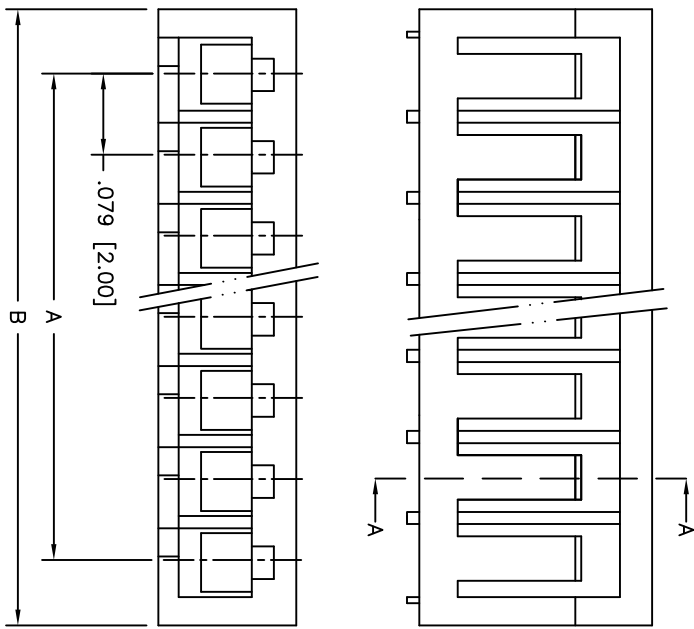

POLES	DIMENSION	
	A	B
2	.078 [2.0]	.204 [5.2]
3	.157 [4.0]	.283 [7.2]
4	.236 [6.0]	.362 [9.2]
5	.314 [8.0]	.440 [11.2]
6	.393 [10.0]	.519 [13.2]
7	.472 [12.0]	.602 [15.3]
8	.551 [14.0]	.681 [17.3]
9	.629 [16.0]	.759 [19.3]
10	.708 [18.0]	.838 [21.3]
11	.787 [20.0]	.917 [23.3]
12	.866 [22.0]	.996 [25.3]
13	.944 [24.0]	1.07 [27.3]
14	1.02 [26.0]	1.15 [29.3]
15	1.10 [28.0]	1.23 [31.3]
16	1.18 [30.0]	1.31 [33.3]

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: White
 Electrical: Operating voltage: 100V AC/AC
 Current rating: 1A AC/DC
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800V AC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] CRIMP HOUSING, RIGHT ANGLE
 NON-POLARIZED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	DY	12/06/10	
CHECKED			
APPROVED			
REF: S00163T	SCALE: NTS	SHEET 1 OF 1	REV: -