

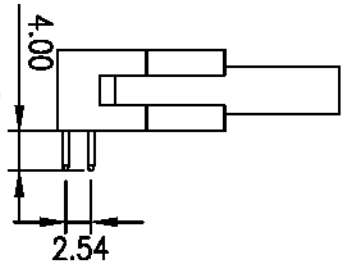
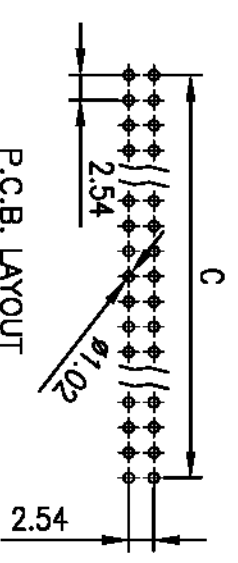
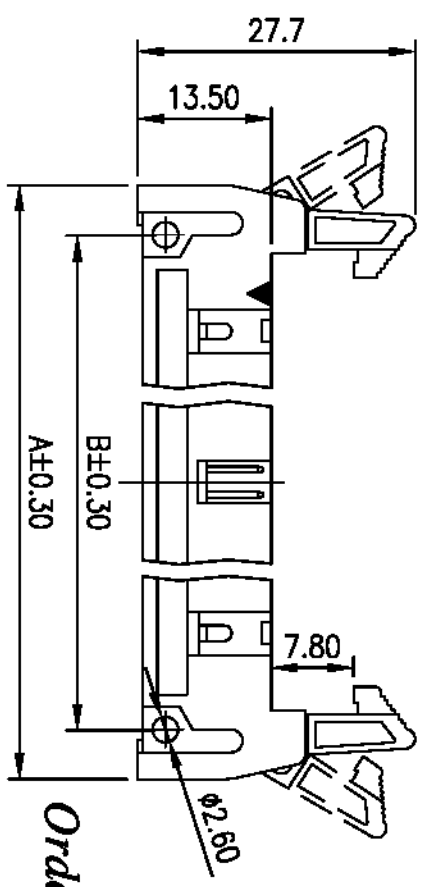


2.54mm(.100") Pitch Eject Latch Header

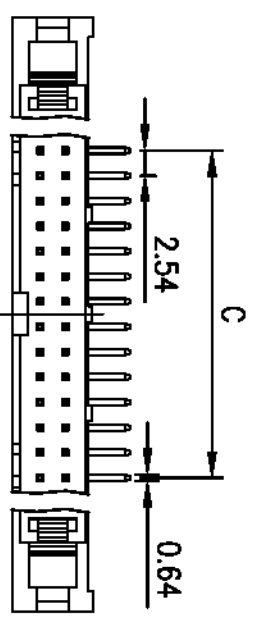

Ordering information:

YY-4800-XXRXL



Features:

- * Available in 10 through 64 Circuits
- * Material: P.B.T UL94-V0
- * 0.64mm(.025") Square Pin
- * Pin Material: Brass/Gold-Plated




Specifications:

- * Pitch Between Poles 2.54mm
- * Rated Voltage 250V AC,DC
- * Rated Current 3A
- * Withstand Voltage 1,000V AC/minute
- * Insulation Resistance 5,000M Ohms/Min
- * Temperature Range -55C~+105C

Circuits	Part No	Dimension mm		
		A	B	C
2X5	YY-4800-10R	32.00	21.84	10.16
2X7	YY-4800-14R	37.08	26.92	15.24
2X8	YY-4800-16R	39.62	29.46	17.78
2X10	YY-4800-20R	44.70	34.54	22.86
2X12	YY-4800-24R	49.78	39.62	27.94
2X13	YY-4800-26R	52.32	42.16	30.48
2X15	YY-4800-30R	57.40	47.24	35.56
2X17	YY-4800-34R	62.48	52.32	40.64
2X20	YY-4800-40R	70.10	59.94	48.26
2X25	YY-4800-50R	82.80	72.64	60.96
2X30	YY-4800-60R	95.50	85.34	73.66
2X34	YY-4800-68R	100.58	90.42	78.74

EDITION	DATE	MODIFY	VIEW	毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE	
A0	2004.08.06	DRAWING			Art Serth	JEFF	Jessica	2004.08.06	YY-4800-XXRXL	B2545RL 048-A0	.00

2.54mm(.100") Pitch Eject Latch Header

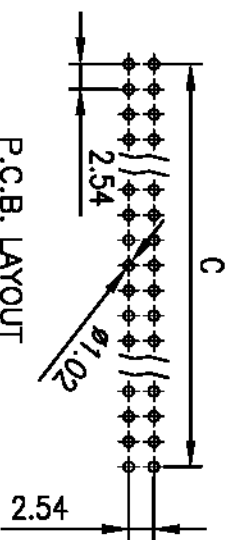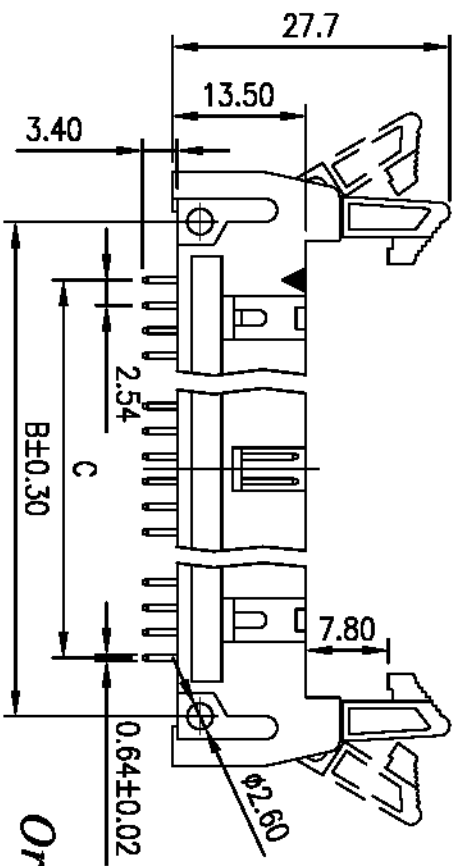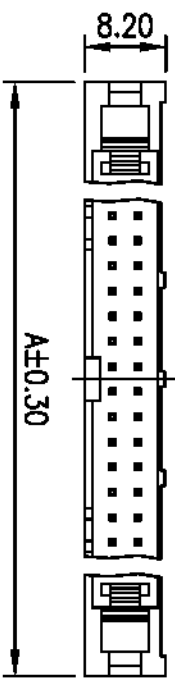

Features:


- * Available in 10 through 64 Circuits
- * Material: P.B.T UL94-V0
- * 0.64mm(.025") Square Pin
- * Pin Material: Brass/Gold-Plated

Specifications:

- * Pitch Between Poles 2.54mm
- * Rated Voltage 250V AC,DC
- * Rated Current 3A
- * Withstand Voltage 1,000V AC/minute
- * Insulation Resistance 5,000M Ohms/Min
- * Temperature Range -55C~+105C

Ordering information:




YY-4800-XXSL



Circuits	Part No	Dimension mm		
		A	B	C
2X5	YY-4800-10S	32.00	21.84	10.16
2X7	YY-4800-14S	37.08	26.92	15.24
2X8	YY-4800-16S	39.62	29.46	17.78
2X10	YY-4800-20S	44.70	34.54	22.86
2X12	YY-4800-24S	49.78	39.62	27.94
2X13	YY-4800-26S	52.32	42.16	30.48
2X15	YY-4800-30S	57.40	47.24	35.56
2X17	YY-4800-34S	62.48	52.32	40.64
2X20	YY-4800-40S	70.10	59.94	48.26
2X25	YY-4800-50S	82.80	72.64	60.96
2X30	YY-4800-60S	95.50	85.34	73.66
2X34	YY-4800-68S	100.58	90.42	78.74

EDITION	DATE	MODIFY	VIEW	YOUNG YAK ENTERPRISE CO.,LTD.	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2004.08.06	DRAWING		毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575	Art Serth	JEFF	Jessica	2004.08.06	YY-4800-XXSL	.00 ±0.30

2.54mm(.100") Pitch Eject Latch Header

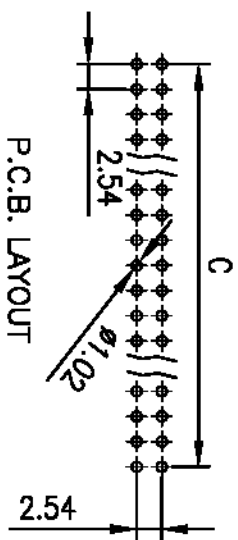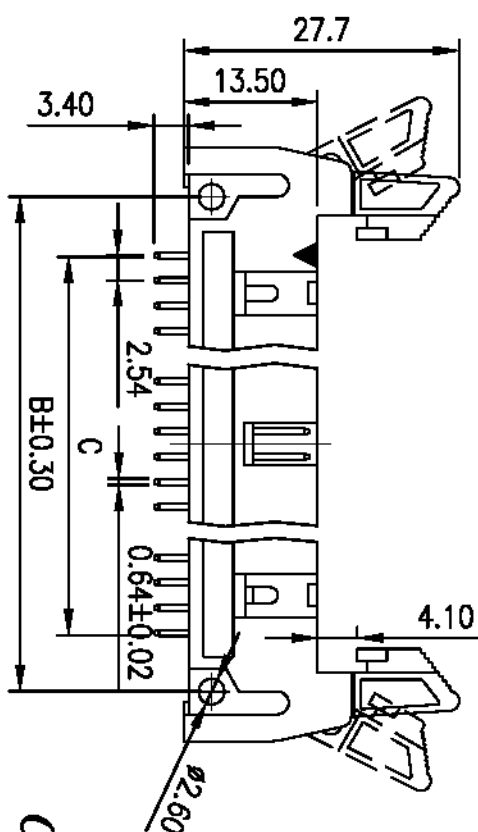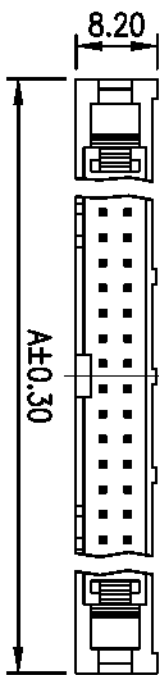

Features:


- * Available in 10 through 64 Circuits
- * Material: P.B.T UL94-V0
- * 0.64mm(.025") Square Pin
- * Pin Material: Brass/Gold-Plated

Specifications:

- * Pitch Between Poles 2.54mm
- * Rated Voltage 250V AC,DC
- * Rated Current 3A
- * Withstand Voltage 1,000V AC/minute
- * Insulation Resistance 5,000M Ohms/Min
- * Temperature Range -55°C~+105°C

Ordering information:

YY-4800-XXSXS



Circuits	Part No	Dimension mm		
		A	B	C
2X5	YY-4800-10S	32.00	21.84	10.16
2X7	YY-4800-14S	37.08	26.92	15.24
2X8	YY-4800-16S	39.62	29.46	17.78
2X10	YY-4800-20S	44.70	34.54	22.86
2X12	YY-4800-24S	49.78	39.62	27.94
2X13	YY-4800-26S	52.32	42.16	30.48
2X15	YY-4800-30S	57.40	47.24	35.56
2X17	YY-4800-34S	62.48	52.32	40.64
2X20	YY-4800-40S	70.10	59.94	48.26
2X25	YY-4800-50S	82.80	72.64	60.96
2X30	YY-4800-60S	95.50	85.34	73.66
2X34	YY-4800-68S	100.58	90.42	78.74

EDITION	DATE	MODIFY	VIEW	YOUNG YAK ENTERPRISE CO.,LTD.	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2004.08.06	DRAWING		毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575	Art Serth	JEFF	Jessica	2004.08.06	YY-4800-XXSXS	.00 ±0.30 .00 ±0.20