

- 1N4614-1 THRU 1N4627-1 AVAILABLE IN JAN, JANTX, JANTXV AND JANS
- LOW CURRENT OPERATION AT 250 mA
- LOW REVERSE LEAKAGE AND LOW NOISE CHARACTERISTICS
- DOUBLE PLUG CONSTRUCTION
- METALLURGICALLY BONDED (-1)

1N4614 thru 1N4627
and
1N4614-1 thru 1N4627-1

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ +50°C
Power Derating: 4 mW / °C above +50°C
Forward Voltage @ 200 mA: 1.1 Volts maximum

* ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

JEDEC TYPE NUMBER	NOMINAL ZENER VOLTAGE $V_Z @ I_{ZT}$	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE $Z_{ZT} @ I_{ZT}$	MAXIMUM REVERSE LEAKAGE CURRENT $I_R @ V_R$		MAXIMUM DC ZENER CURRENT I_{ZM}	MAXIMUM NOISE DENSITY N_D
	(Note 1) VOLTS	μA	(Note 2) OHMS	μA	VOLTS	mA	$\mu V / Hz$
1N4614	1.8	250	1200	7.5	1	212	1
1N4615	2.0	250	1250	5.0	1	190	1
1N4616	2.2	250	1300	4.0	1	173	1
1N4617	2.4	250	1400	2.0	1	159	1
1N4618	2.7	250	1500	1.0	1	141	1
1N4619	3.0	250	1600	0.8	1	127	1
1N4620	3.3	250	1650	7.5	1.5	116	1
1N4621	3.6	250	1700	7.5	2	106	1
1N4622	3.9	250	1650	5.0	2	98	1
1N4623	4.3	250	1600	4.0	2	87	1
1N4624	4.7	250	1550	10.0	3	81	1
1N4625	5.1	250	1500	10.0	3	75	2
1N4626	5.6	250	1400	10.0	4	68	4
1N4627	6.2	250	1200	10.0	5	61	5

* JEDEC Registered Data.

NOTE 1 The JEDEC type numbers shown above have a Zener voltage tolerance of $\pm 5\%$ of the nominal Zener voltage. V_Z is measured with the device junction in thermal equilibrium at an ambient temperature of $25^\circ C \pm 3^\circ C$. A "C" suffix denotes a $\pm 2\%$ tolerance and a "D" suffix denotes a $\pm 1\%$ tolerance.

NOTE 2 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} (25 μA a.c.)

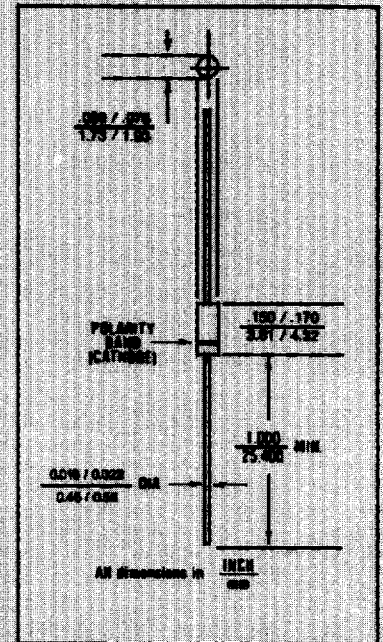


FIGURE 1

DESIGN DATA

CASE: Hermetically sealed glass case. DO - 35 outline.

LEAD MATERIAL: Copper clad steel.

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: AT 3/8" Lead Spacing = 250 °C/W maximum

POLARITY: Diode to be operated with the banded (cathode) end positive with respect to the opposite end.

MOUNTING POSITION: ANY.



COMPENSATED DEVICES INCORPORATED

166 TREMONT STREET, MELROSE, MASSACHUSETTS 02176

PHONE (617) 665-1071

FAX (617) 665-7379

WWW SITE: <http://www.cdi-diodes.com>

E-mail: mail@cdi-diodes.com

1N4614 thru 1N4627 INCLUDING -1 VERSIONS

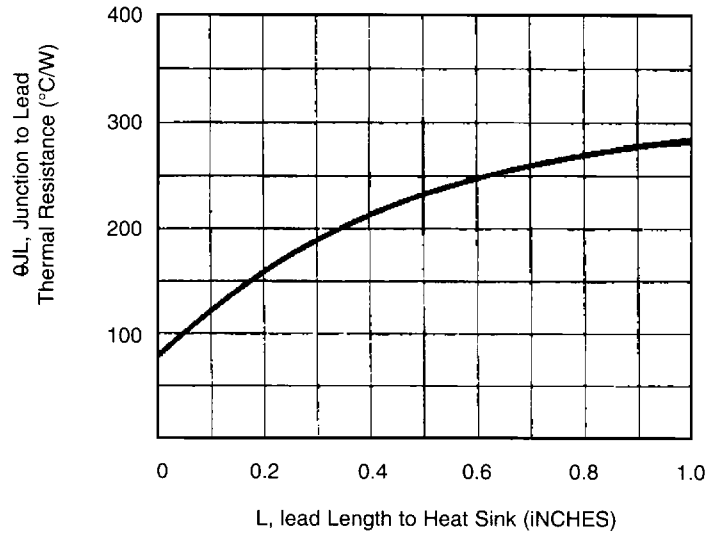


FIGURE 2
TYPICAL THERMAL RESISTANCE

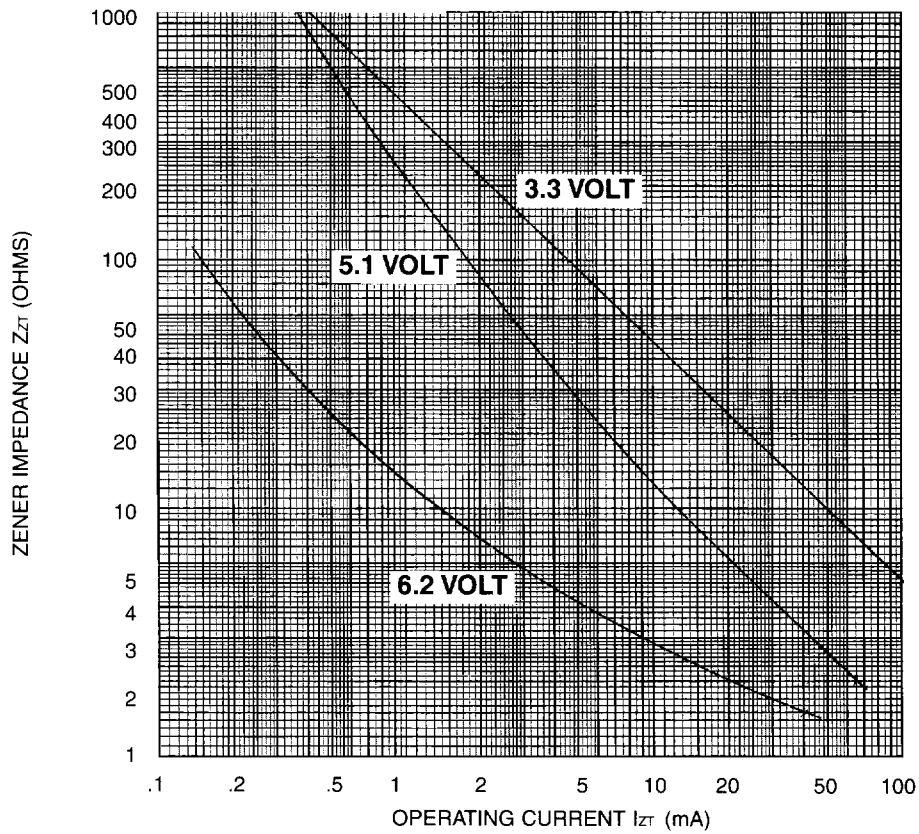


FIGURE 3
ZENER IMPEDANCE VS. OPERATING CURRENT