
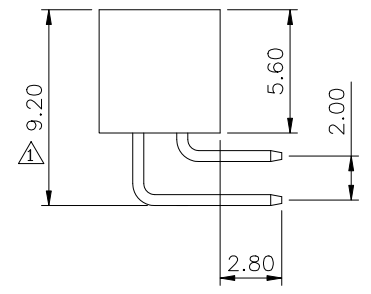
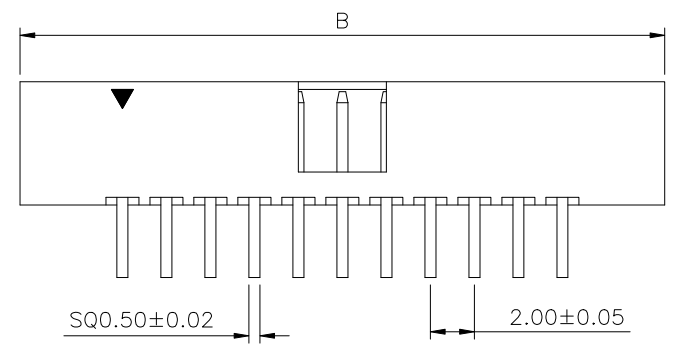


SPECIFICATIONS
 Current Rating: 2Amps
 Insulator Resistance: 1000 Megohms Min.
 Dielectric Withstanding: AC 500V
 Contact Resistance: 20 Milliohms Max.
 Operating Temperature: -40°C To +105°C
 Max Processing Temp: 230°C For 30~60 Seconds
 Insulator: PBT+30% UL94V-0 Black
 Contact: Copper Alloy
 Plating: Gold Flash All Over
 RoHS Compliant

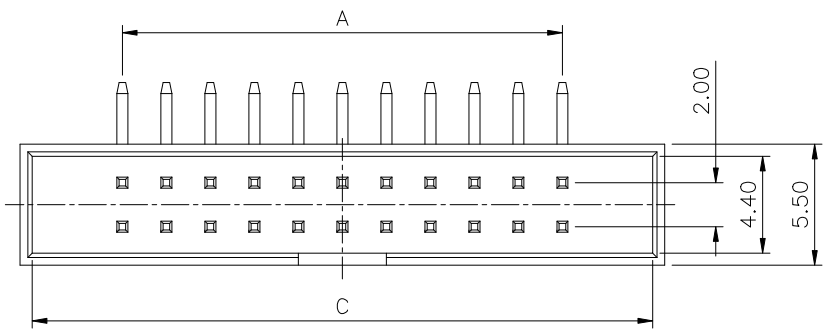

PIN	A	B	C
6	4.00	13.30	12.20
8	6.00	15.30	14.20
10	8.00	17.30	16.20
12	10.00	19.30	18.30
14	12.00	21.30	20.20
16	14.00	23.30	22.20
20	18.00	27.30	26.20
24	22.00	31.30	30.20
26	24.00	33.30	32.20
30	28.00	37.30	36.20
34	32.00	41.30	40.20
40	38.00	47.30	46.20
44	42.00	51.30	50.20
50	48.00	57.30	56.20
60	58.00	67.30	66.20
64	62.00	71.30	70.20
68	66.00	75.30	74.20

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X.* ±5.00* .X ±0.38 .X* ±2.00* .XX ±0.25 .XX* ±1.00* .XXX ±0.15 .XXX* ±0.50*				
PART No. MBRXX-H		MEI						
DRAWING No. MBRXX-H		CHECKED BY HZF						
SCALE NONE		DRAWING BY QZZ						
REV. A1		UNIT mm						
REV. A1		NO. REV.						
REV. A1		REVISIONS						
REV. A1		CHK						
REV. A1		DATE						