


TE Internal #: 2-87220-7 PCB Mount Header, Vertical, Board-to-Board, 27 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Solder, Signal, Black

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

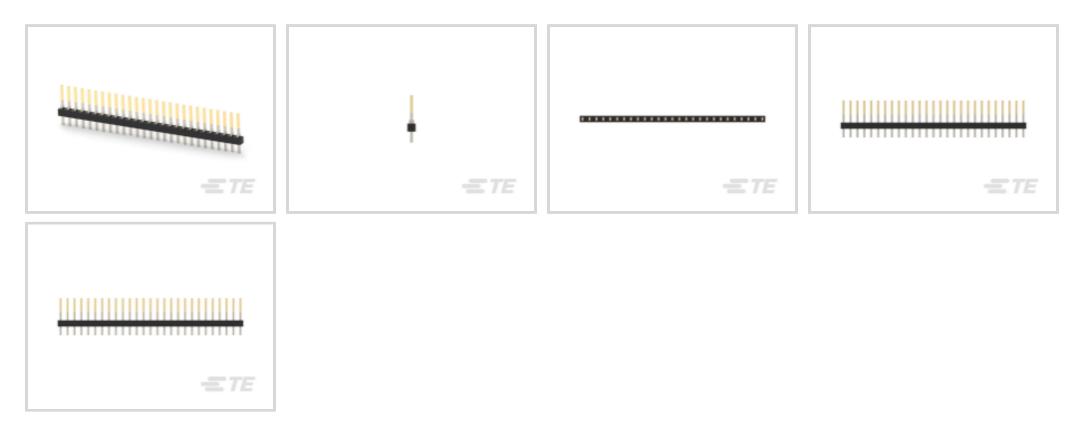

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 27

Number of Rows: 1

Features

Product Type Features



PCB Connector Assembly Type	PCB Mount Header		
Connector System	Board-to-Board		
Header Type	Unshrouded		
Sealable	No		
Connector & Contact Terminates To	Printed Circuit Board		
Configuration Features			
Connector Contact Load Condition	Fully Loaded		
PCB Mount Orientation	Vertical		
PCB Mount Orientation Number of Positions	Vertical 27		
Number of Positions	27		
Number of Positions Number of Rows	27 1		
Number of Positions Number of Rows Board-to-Board Configuration	27 1		

PCB Mount Header, Vertical, Board-to-Board, 27 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Solder, Signal, Black



Body Features

Drimonny Droduct Calar	Dlask
Primary Product Color	Black
Contact Features	
Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Gold Flash
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Type	Pin
Contact Current Rating (Max)	3 A
Termination Features	
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	Without
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic
Dimensions	
PCB Thickness (Recommended)	1.4 mm[.055 in]
Usage Conditions	
Housing Temperature Rating	Standard
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Agency/Standard	CSA, UL
Approved Standards	CSA LR7189, UL E28476

PCB Mount Header, Vertical, Board-to-Board, 27 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Solder, Signal, Black



UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	500
Packaging Type	Carton
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Canability	Wave solder canable to 210°C

Solder Process Capability

Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



PCB Mount Header, Vertical, Board-to-Board, 27 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Solder, Signal, Black





Customers Also Bought



CK	(1.5)	່ວບ	1.57	6 1	IVIO
0.0	002	-0 12	- 0 /	<u> </u>	

PT570N20

Documents

Product Drawings 27 MODII HDR SRST UNSHRD .100

English

CAD Files

Customer View Model ENG_CVM_2-87220-7_K.3d_igs.zip

English

Customer View Model

ENG_CVM_2-87220-7_K.3d_stp.zip

English

Customer View Model

ENG_CVM_2-87220-7_K.2d_dxf.zip

English

3D PDF

English

3D PDF

S For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 27 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Solder, Signal, Black



3D

Customer View Model ENG_CVM_CVM_2-87220-7_P.2d_dxf.zip English Customer View Model ENG_CVM_CVM_2-87220-7_P.3d_igs.zip English Customer View Model ENG_CVM_CVM_2-87220-7_P.3d_stp.zip English

Datasheets & Catalog Pages AMPMODU_INTERCONNECTION_SYSTEM_SECTION5

English