


Top Entry Type (JS-1125-XX)

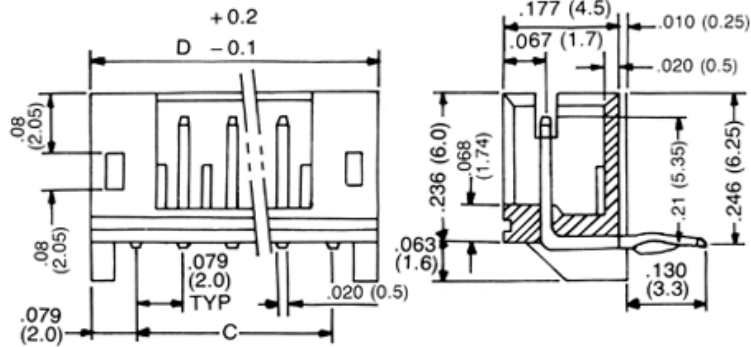


SPECIFICATIONS

Voltage rating: 250VAC/VDC
 Current rating: 2 amps AC/DC
 Contact material: Brass
 Contact plating: Tin
 Contact resistance: Initial value/10 milliohms max.
 Initial value/20 milliohms max.
 after environmental testing
 Withstand voltage: 800VAC for 1 min.
 Insulation material: Nylon 66, UL94V-0
 Insulation resistance: 1,000 megohms min.
 Temperature range: -25°C to +85°C
 PC board thickness: .031"-.063"(0.8-1.6mm)

Dimensions in (mm)		
Poles	C	D
2	.079 (02.0)	.236 (06.0)
3	.157 (05.0)	.315 (08.0)
5	.236 (06.0)	.472 (10.0)
5	.315 (08.0)	.565 (12.0)
6	.394 (10.0)	.551 (14.0)
7	.472 (12.0)	.630 (16.0)
8	.551 (15.0)	.709 (18.0)
9	.630 (16.0)	.787 (20.0)
10	.709 (18.0)	.886 (22.0)
11	.787 (20.0)	.945 (24.0)
12	.886 (22.0)	1.024 (26.0)
13	.945 (25.0)	1.102 (28.0)
14	1.024 (26.0)	1.181 (30.0)
15	1.102 (28.0)	1.260 (32.0)
16	1.181 (30.0)	1.339 (34.0)

Side Entry Type (JS-1125R-XX)

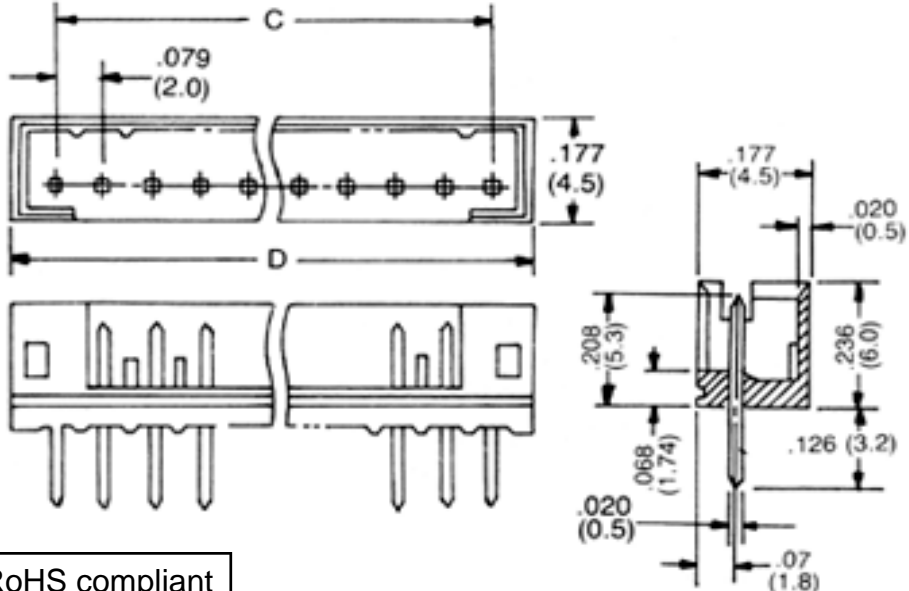

Note:
 Add R to part number for side entry version

RoHS compliant

Series	Type	Positions	Options
JS	1125X	XX	XX
Disconnectable Connector	X: Blank=Vertical R=Right Angle	02-16	Blank=None KT=Kinked Tail

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/10/99
				Checked	Lizzy	06/10/99
				Drawn	Tina	06/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-1125X-XX**

Description: Disconnectable connector, 2.00mm (.079") pitch