



**FEATURES:**

- Capacitance range: 0.1pF to 220uF
- Voltage range: 4V to 100V
- Terminations: 100% matte Tin (Sn), Palladium (Pd-Ag), Gold (Au) and Lead (Pb)
- Very low ESR in X7R/X5R (<10mΩ typical)
- Ceramic monolithic structure provides excellent reliability



**PART NUMBER STRUCTURE**


C	0805	COG	500	-	101	J	N	P	□ □														
<b>Series</b>	<b>Size</b>	<b>Temperature Characteristic (Dielectric)</b>	<b>Rated Voltage</b>		<b>Capacitance</b>	<b>Tolerance</b>	<b>Termination</b>	<b>Packaging</b>	<b>Optional Thickness Identifier</b>														
01005	0201	0402	0504	0603	0805	1206	1210	1812	2220	22212	COG	X7R	X6S	X5R	Y5V	Z5U	1st two digits are significant followed by number of zeroes.	4R0 = 4.0 VDCW 6R3 = 6.3 VDCW 100 = 10 VDCW 160 = 16 VDCW 250 = 25 VDCW 500 = 50 VDCW 630 = 63 VDCW 101 = 100 VDCW	1st two digits are significant, followed by number of zeroes. e.g: 101 = 100pF R denotes decimal 6R8 = 6.8pF	* B = ± 0.1pF * C = ± 0.25pF * D = ± 0.5pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% N = ± 30% Z = +80 - 20% * For values below 10pF only.	N = 100% matte Tin (Sn) over Nickel * P = Palladium Silver * G = Gold over Nickel Pb = 90% Tin (Sn) /10% Lead (Pb) * Pd/Ag & Gold terminations have limited values & sizes available.	D = Paper Tape (10" Reel) E = Embossed Tape (7" Reel) P = Paper Tape (7" Reel) R = Paper Tape (13" Reel) U = Embossed Tape (13" Reel)	Leave blank for standard thickness. Designate "-" for Min. "*" for Max. followed by Thickness Code <b>e.g:</b> - E (min. thickness of .026") * E (max. thickness of .026")

Example P/N: C0805COG500-101JNP

**Optional Thickness Identifier Codes:**

CODE:	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	6
DIMENSION:	.015	.020	.026	.030	.035	.040	.045	.050	.055	.060	.065	.070	.075	.080	.085	.090	.095	.100	.105	.110	.023


**DIMENSIONS**

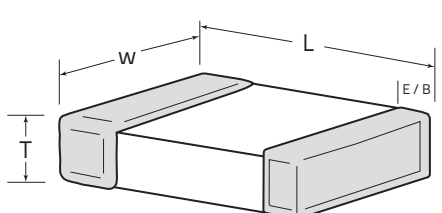

SIZE	L	W	T	E/B
01005	0.016 ± 0.0008 (0.4 ± 0.02)	0.008 ± 0.0008 (0.2 ± 0.02)	See Specific Value	0.002 (min.) (0.05)
0201	0.024 ± 0.002 (0.6 ± 0.05)	0.012 ± 0.002 (0.3 ± 0.05)	See Specific Value	0.002 (min.) (0.20)
0402	0.040 ± 0.002 (1.0 ± 0.05)	0.020 ± 0.002 (0.5 ± 0.05)	See Specific Value	0.004 (min.) (0.10)
0603	0.063 ± 0.006 (1.6 ± 0.15)	0.031 ± 0.0046 (0.8 ± 0.15)	See Specific Value	0.008 (min.) (0.20)
0805	0.08 ± 0.008 (2.0 ± 0.20)	0.050 ± 0.008 (1.25 ± 0.20)	See Specific Value	0.020 ± 0.010 (0.508 ± 0.254)
1206	0.126 ± 0.008 (3.2 ± 0.20)	0.063 ± 0.008 (1.6 ± 0.20)	See Specific Value	0.020 ± 0.010 (0.508 ± 0.254)
1210	0.126 ± 0.008 (3.2 ± 0.20)	0.098 ± 0.008 (2.50 ± 0.20)	See Specific Value	0.020 ± 0.010 (0.508 ± 0.254)
1812	0.177 ± 0.012 (4.495 ± 0.30)	0.126 ± 0.012 (3.20 ± 0.30)	See Specific Value	0.024 ± 0.015 (0.6096 ± 0.381)
2220	0.225 ± 0.016 (5.715 ± 0.41)	0.200 ± 0.006 (5.08 ± 0.41)	See Specific Value	0.025 ± 0.015 (0.635 ± 0.381)

Unit: inches (mm)

**STRUCTURE**

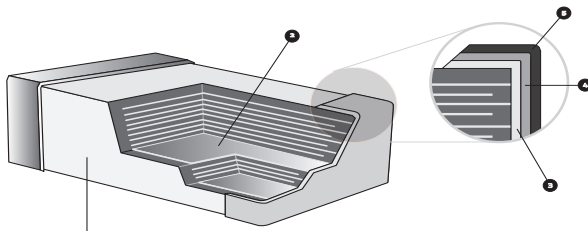


1	Ceramic Body (dielectric)	4	Nickel Plating
2	Inner Electrode	5	Tin Plating
3	Inner Termination		

## ELECTRICAL SPECIFICATIONS

### NP0/COG

Typical Capacitance Change vs. Temperature

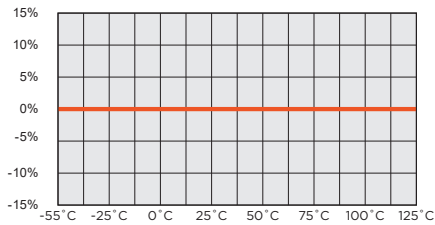

**Operating Temperature Range:**

-55°C to +125°C

**Temperature Coefficient:**

0 ±30PPM/°C

**Temperature Voltage Coefficient:**

0 ±30PPM/°C

**Insulation Resistance:**

>1000 Ω-F or 10 GΩ, for values ≤ 0.047μF (whichever is less at 25°C, WDCV). For Capacitance values > 0.047μF, the 500 Ω-F rule applies. (The IR at 125°C is 10% of the value at 25°C)

**Ageing:**

None

**Withstanding Voltage:**

>2.5 times VDCW

**Capacitance Tolerance:**


B,C,D,F,G,J,K

**Dissipation Factor:**

0.1% max

### X7R

Typical Capacitance Change vs. Temperature

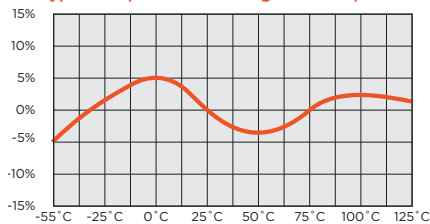

**Operating Temperature Range:**

-55°C to +125°C

**Temperature Coefficient:**

0 ±15%Δ°C MAX.

**Temperature Voltage Coefficient:**

X7R not applicable

**Insulation Resistance:**

>100 Ω-F or 10 GΩ, whichever is less at 25°C, VDCW. (The IR at 125°C is 10% of the value at 25°C)

**Ageing:**

2.5% per decade hour, typical

**Withstanding Voltage:**

>2.5 times VDCW


**Capacitance Tolerance:**

J,K,M

RATED VOLTAGE	D.F.	EXCEPTION OF D.F.	
≥50V	≤2.5%	≤3%	0201 (50V); 0603≥0.047μF 0805≥0.22μF; 1206≥0.47μF
		≤5%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF
25V	≤2.5%	≤5%	0201≥0.01μF; 0402≥0.33μF; 0805≥2.2μF 1206≥4.7μF; 1210≥22μF
		≤10%	
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF
		≤10%	0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF
10V	≤5%	≤10%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF
6.3V	≤10%		

### X5R

Typical Capacitance Change vs. Temperature

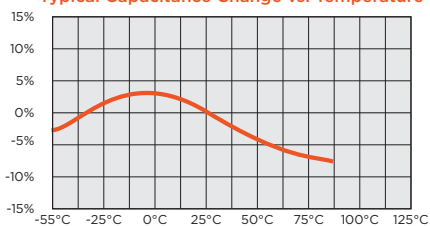

**Operating Temperature Range:**

-55°C to +85°C

**Temperature Coefficient:**

0 ±15%Δ°C MAX.

**Temperature Voltage Coefficient:**

X7R not applicable

**Insulation Resistance:**

>100 Ω-F or 10 GΩ, whichever is less at 25°C, VDCW. (The IR at 125°C is 10% of the value at 25°C)

**Ageing:**

2.5% per decade hour, typical

**Withstanding Voltage:**

>2.5 times VDCW


**Capacitance Tolerance:**

K,M

RATED VOLTAGE	D.F.	EXCEPTION OF D.F.	
≥50V	≤2.5%	≤3%	0201 (50V); 0603≥0.047μF 0805≥0.22μF; 1206≥0.47μF
		≤5%	0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF
25V	≤2.5%	≤5%	0201≥0.01μF; 0805≥1μF; 1210≥4.7μF
		≤10%	0402≥0.10μF; 0603≥0.33μF; 0805≥2.2μF 1206≥4.7μF; 1210≥22μF
16V	≤3.5%	≤5%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF
		≤10%	0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF
≤10V	≤5%	≤10%	0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF
6.3V	≤10%		

### Z5U

Typical Capacitance Change vs. Temperature

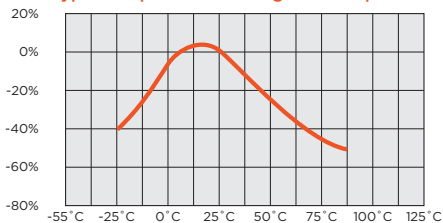

**Operating Temperature Range:**

+10°C to +85°C

**Temperature Coefficient:**

+22% - 56%Δ°C MAX.

**Insulation Resistance:**

>100 Ω-F or 10 GΩ, whichever is less at 25°C, WDCV. (The IR at 125°C is 10% of the value at 25°C)

**Ageing:**

5% per decade hour, typical

**Withstanding Voltage:**

>2.5 times VDCW

**Capacitance Tolerance:**


M,Z

RATED VOLTAGE	D.F.	EXCEPTION OF D.F.	
≥50V	≤5%	≤9%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF;
25V	≤5%	≤9%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF
16V	≤9%	≤12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF
10V	≤12.5%	≤16%	0603≥2.2μF; 0805≥3.3μF; 1206≥4.7μF; 1210≥10μF; 1812≥47μF
6.3V	≤16%		

## ELECTRICAL SPECIFICATIONS

### Y5V

Typical Capacitance Change vs. Temperature

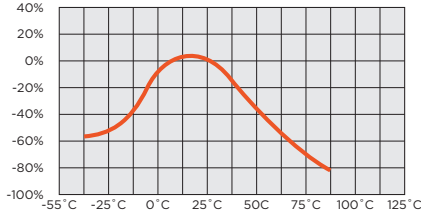

**Operating Temperature Range:**  
-30°C to +85°C

**Temperature Coefficient:**  
+22% - 82%Δ°C MAX.

**Insulation Resistance:**  
>100 Ω-F or 10 GΩ, whichever is less at 25°C, VDCW. (The IR at 125°C is 10% of the value at 25°C)

**Ageing:**  
7% per decade hour, typical

**Withstanding Voltage:**  
>2.5 times VDCW

**Capacitance Tolerance:**  
M,Z

RATED VOLTAGE	D.F.	EXCEPTION OF D.F.	
≥50V	≤5%	≤9%	0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;
25V	≤5%	≤9%	0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; ≥1206≥1uF; 1210≥4.7uF
16V	≤9%	≤12.5%	0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF
10V	≤12.5%	≤16%	0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF
6.3V	≤16%		

## TEST PARAMETERS

Test parameters for Multilayer Ceramic Capacitors  
- X7R, X5R and Y5V:

1KHz ± 100Hz at 1.0 ± 0.2 Vrms < 10uF (10 V min.)  
1KHz ± 100Hz at 0.5 ± 0.1 Vrms < 10uF (6.3V max.)  
120Hz ± 24Hz at 1.0 ± 0.1 Vrms ≥ 10uF


Test parameters for Multilayer Ceramic Capacitors  
- NPO/COG:

1MHz ± 100KHz at 1.0 ± 0.2 Vrms ≤ 1000pF, 25°C  
1KHz ± 100Hz at 1.0 ± 0.2 Vrms > 1000pF, 25°C

**NOTE:** To ensure proper capacitance readings, the voltage level must be held constant. The HP4284 and Agilent E4980 has a "ALC" (Automatic Level Control) function and should be switched to the "ON" position for accurate capacitance readings.

## VOLTAGE AND CAPACITANCE RANGE

### COG (NPO) DIELECTRIC



Values that are typically available.


(All measurements in inches)

SIZE	01005 (± 0.0008)	0201 (± 0.002)	0402 (± 0.004)	0504 (± 0.008)	0603 (± 0.006)	0805 (± 0.008)	1206 (± 0.008)	1210 (± 0.008)	1812 (± 0.012)
T (max)	0.008	0.012	0.025	0.040	0.033	0.055	0.070	0.075	0.085
Min E/B	0.002	0.002	0.004	0.005	0.008	0.020 ± .010	0.020 ± .010	0.020 ± .010	0.024 ± .015
VDCW (MAX)	6.3V 16V 25V 50V	25V 50V	25V 50V 100V	50V 100V	50V 100V	25V 50V 100V	50V 100V	50V 100V	50V 100V
CAPACITANCE CODE ↑ CAPACITANCE VALUE ↓	OR1	0.1pF							
	OR2	0.2pF							
	OR3	0.3pF							
	OR4	0.4pF							
	OR5	0.5pF							
	1R0	1.0pF							
	1R2	1.2							
	1R5	1.5							
	1R8	1.8							
	2R2	2.2							
	2R7	2.7							
	3R3	3.3							
	3R9	3.9							
	4R7	4.7							
	5R0	5.0							
	5R6	5.6							
	6R8	6.8							
	8R2	8.2							
100	10pF								
120	12								
150	15								
180	18								
220	22								

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

**VOLTAGE AND CAPACITANCE RANGE**

**COG (NPO) DIELECTRIC**



Values that are typically available.


(All measurements in inches)

SIZE	01005 (± 0.0008)				0201 (± 0.002)		0402 (± 0.004)		0504 (± 0.008)		0603 (± 0.006)		0805 (± 0.008)			1206 (± 0.008)		1210 (± 0.008)		1812 (± 0.012)		2220 / 2221 (± 0.016)		
L	0.016				0.024		0.040		0.053		0.063		0.080			0.126		0.126		0.177		0.225 / .225		
W	0.008				0.012		0.020		0.040		0.032		0.050			0.063		0.098		0.126		0.200 / .210		
T (max)	0.008				0.012		0.025		0.040		0.033		0.055			0.070		0.075		0.085		0.108 / .108		
Min E/B	0.002				0.002		0.004		0.005		0.008		0.020 ± .010			0.020 ± .010		0.020 ± .010		0.024 ± .015		0.025 ± .015		
VDCW (MAX)	6.3V	16V	25V	50V	25V	50V	25V	50V	100V	50V	100V	50V	100V	25V	50V	100V	50V	100V	50V	100V	50V	100V	50V	100V
270	27																							
330	33																							
390	39																							
470	47																							
560	56																							
680	68																							
820	82																							
101	100pF																							
121	120																							
151	150																							
181	180																							
221	220																							
271	270																							
331	330																							
391	390																							
471	470																							
561	560																							
681	680																							
821	820																							
102	1000pF																							
122	1200																							
152	1500																							
182	1800																							
222	2200																							
272	2700																							
332	3300																							
392	3900																							
472	4700																							
562	5600																							
682	6800																							
822	8200																							
103	.01uF																							
123	.012																							
153	.015																							
183	.018																							
223	.022																							
273	.027																							
333	.033																							
393	.039																							
473	.047																							
563	.056																							
683	.068																							
823	.082																							
104	.100uF																							
124	.120																							
154	.150																							
184	.180																							
224	.220																							
274	.270																							
334	.330																							
394	.390																							
474	.470																							
564	.560																							
684	.680																							
824	.820																							

NOTE: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

**VOLTAGE AND CAPACITANCE RANGE**

**X7R DIELECTRIC**



Values that are typically available.

(All measurements in inches)

SIZE	01005 (± 0.0008)		0201 (± 0.002)				0402 (± 0.004)				0504 (± 0.008)			0603 (± 0.006)				0805 (± 0.008)													
	L	W	T (max)		Min E/B		VDCW (MAX)		CAPACITANCE VALUE		CAPACITANCE CODE		CAPACITANCE VALUE		CAPACITANCE CODE		CAPACITANCE VALUE		CAPACITANCE CODE												
L	0.016	0.024	0.040		0.040		0.053		0.040			0.038				0.058															
W	0.008	0.012	0.020		0.020		0.020			0.040			0.032				0.050														
T (max)	0.008	0.012	0.025		0.025		0.040			0.038				0.058																	
Min E/B	0.002	0.002	0.004		0.005			0.008				0.020 ± .010																			
VDCW (MAX)	6.3V	10V	6.3V	10V	16V	25V	16V	25V	50V	100V	25V	50V	100V	10V	16V	25V	50V	100V	25V	50V	100V										
101	102	121	151	181	221	271	331	391	471	561	681	821	102	122	152	182	222	272	332	392	472	562	682	822	103	123	153	183	223	273	333
100pF	120	150	180	220	270	330	390	470	560	680	820	1000pF	1200	1500	1800	2200	2700	3300	3900	4700	5600	6800	8200	.01uF	.012	.015	.018	.022	.027	.033	


\* For values above 1uF, thickness may be greater than specified above.

T(max): 0603 - 0.040"  
 0805 - 0.060"

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.  
 All components manufactured with the X7R dielectric are also available as an X5R dielectric.

**VOLTAGE AND CAPACITANCE RANGE**

**X7R DIELECTRIC**



Values that are typically available.

(All measurements in inches)

SIZE	0201 (± 0.002)			0402 (± 0.004)				0603 (± 0.006)					0805 (± 0.008)							
	L	W	T (max)*	Min E/B				Min E/B					Min E/B							
L	0.024	0.024	0.024	0.040				0.063					0.080							
W	0.012	0.012	0.012	0.020				0.032					0.050							
T (max)*	0.012	0.012	0.012	0.025				0.038					0.058							
Min E/B	0.002			0.004				0.008					0.020 ± .010							
VDCW (MAX)	4V	6.3V	10V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	100V	6.3V	10V	16V	25V	50V	100V
393	.039																			
473	.047																			
563	.056																			
683	.068																			
823	.082																			
104	0.10uF	**	**	**																
124	.120																			
154	.150																			
184	.180																			
224	.220																			
274	.270																			
334	.330																			
394	.390																			
474	.470																			
564	.560																			
684	.680																			
824	.820																			
105	1.00uF																			
125	1.20																			
155	1.50																			
185	1.80																			
225	2.20																			
335	3.30																			
475	4.70																			35V
685	6.80																			
106	10.0uF																			
156	15.0uF																			
226	22.0uF																			
476	47.0uF																			
107	100.0uF																			


\* For values above 1uF, thickness may be greater than specified above.

T(max): 0603 - 0.040"  
 0805 - 0.060"

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available. All components manufactured with the X7R dielectric are also available as an X5R dielectric.


\*\* RE: 0201, X7R, 0.1uF; When the operating temperature range is between 100°C and 125°C, it is recommended to apply the following voltage derating as shown in the diagram below.

**DERATING CURVE FOR 0201, 0.1UF, X7R ONLY**

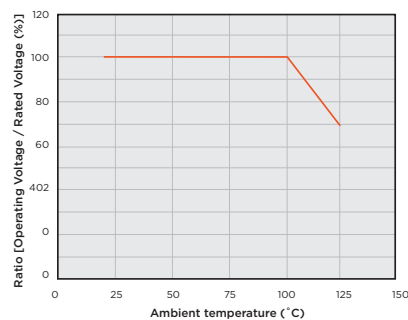

**VOLTAGE AND CAPACITANCE RANGE**

**X7R DIELECTRIC**



Values that are typically available.

(All measurements in inches)

SIZE	1206 (± 0.008)					1210 (±0.008)					1812 (±0.012)					2220 / 2221 (±0.016)				
	L	W	T (max)*	Min E/B		L	W	T (max)*	Min E/B		L	W	T (max)*	Min E/B		L	W	T (max)*	Min E/B	
VDCW (MAX)	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	6.3V	10V	16V	25V	50V	100V	16V	25V	50V	100V
102	1000pF																			
122	1200																			
152	1500																			
182	1800																			
222	2200																			
272	2700																			
332	3300																			
392	3900																			
472	4700																			
562	5600																			
682	6800																			
822	8200																			
103	.01uF																			
123	.012																			
153	.015																			
183	.018																			
223	.022																			
273	.027																			
333	.033																			
393	.039																			
473	.047																			
563	.056																			
683	.068																			
823	.082																			
104	.100uF																			
124	.120																			
154	.150																			
184	.180																			
224	.220																			
274	.270																			
334	.330																			

\* For values above 1uF, thickness may be greater than specified above.


T(max): 0603 - 0.040"

0805 - 0.060"

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available. All components manufactured with the X7R dielectric are also available as an X5R dielectric.

**VOLTAGE AND CAPACITANCE RANGE**

**X7R DIELECTRIC**



Values that are typically available.

(All measurements in inches)

SIZE	1206 (± 0.008)						1210 (±0.008)						1812 (±0.012)						2220 / 2221 (±0.016)					
	L		W		T (max)*		Min E/B		VDCW (MAX)		CAPACITANCE VALUE		CAPACITANCE CODE		VDCW (MAX)		CAPACITANCE VALUE		CAPACITANCE CODE					
	0.126	0.063	0.070	0.020 ± .010	0.020 ± .010	0.024 ± .015	0.025 ± .015	6.3V	10V	16V	25V	50V	100V	6.3V	10V	16V	25V	50V	100V	16V	25V	50V	100V	
394	.390																							
474	.470																							
564	.560																							
684	.680																							
824	.820																							
105	1.00uF																							
125	1.20																							
155	1.50																							
185	1.80																							
225	2.20																							
335	3.30																							
475	4.70																							
685	6.80																							
106	10.0uF																							
156	15.0uF																				X7S/X7R	X7S/X7R	X7S/X7R	
226	22.0uF																							
476	47.0uF																							
107	100.0uF																							

\* For values above 1uF, thickness may be greater than specified above.


T(max): 1206 - 0.075"      1812 - 0.130"  
 1210 - 0.125"      2220 - 0.135"

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available. All components manufactured with the X7R dielectric are also available as an X5R dielectric.



**VOLTAGE AND CAPACITANCE RANGE**

**X5R DIELECTRIC**



Values that are typically available.

(All measurements in inches)

SIZE	01005 (±0.0008)	0201 (±0.002)	0402 (±0.004)	0603 (±0.006)	0805 (±0.008)	1206 (±0.008)	1210 (±0.016)	1812 (±0.016)
L	0.016	0.024	0.040	0.063	0.080	0.126	0.126	0.177
W	0.008	0.012	0.020	0.032	0.050	0.063	0.098	0.126
T (max)	0.008	0.0216	0.025	0.040	0.060	0.072	0.125	0.130
Min. E/B	0.002	0.002	0.004	0.008	0.020±.010	0.020±.010	0.020±.010	0.024±.015
VDCW (MAX)	6.3V 10V	4V 6.3V 10V 16V 25V	4V 6.3V 10V 16V 25V 50V	6.3V 10V 16V 25V 35V 50V	6.3V 10V 16V 25V 50V	6.3V 10V 16V 25V	16V 25V	16V 25V
CAPACITANCE CODE	102	1000pF						
	122	1200						
CAPACITANCE VALUE	152	1500						
	182	1800						
CAPACITANCE VALUE	222	2200						
	272	2700						
CAPACITANCE VALUE	332	3300						
	392	3900						
CAPACITANCE VALUE	472	4700						
	562	5600						
CAPACITANCE VALUE	682	6800						
	822	8200						
CAPACITANCE VALUE	103	.01uF						
	153	.015						
CAPACITANCE VALUE	223	.022						
	333	.033						
CAPACITANCE VALUE	393	.039						
	473	.047						
CAPACITANCE VALUE	104	0.10uF						
	154	.150						
CAPACITANCE VALUE	224	.220						
	334	.330						
CAPACITANCE VALUE	474	.470						
	684	.680						
CAPACITANCE VALUE	105	1.00uF						
	125	1.20						
CAPACITANCE VALUE	155	1.50						
	185	1.80						
CAPACITANCE VALUE	225	2.20						
	335	3.30						


\* For values above 1uF, thickness may be greater than specified above.

T(max): 1206 - 0.075"      1812 - 0.130"  
 1210 - 0.125"      2220 - 0.135"

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available. All components manufactured with the X7R dielectric are also available as an X5R dielectric.

## VOLTAGE AND CAPACITANCE RANGE

### X5R DIELECTRIC (0402-1206)



Values that are typically available.

(All measurements in inches)

SIZE	0201 (± 0.002)			0402 (± 0.009)			0603 (± 0.006)			0805 (± 0.008)					1206 (± 0.008)									
L	0.024			0.040			0.063			0.080					0.126									
W	0.012			0.020			0.032			0.050					0.063									
T (max)	0.0216			0.0335			0.040			0.060					0.072									
Min E/B	0.002			0.004			0.008			0.020 ± .010					0.020 ± .010									
VDCW (MAX)	4V	6.3V	10V	4V	6.3V	10V	16V	4V	6.3V	10V	16V	25V	4V	6.3V	10V	16V	25V	35V	50V	6.3V	10V	16V	25V	50V
395	3.90uF																							
475	4.70uF																							
685	6.80uF																							
106	10.0uF																							
156	15.0uF																							
226	22.0uF																							
476	47.0uF																							
107	100.0uF																							
157	150.0uF																							
227	220.0uF																							

### X5R DIELECTRIC (1210-2221)

(All measurements in inches)

SIZE	1210 (±0.016)					1812 (±0.016)				2220 / 2221 (±0.016)			
L	0.126					0.177				0.225 / .225			
W	0.098					0.126				0.200 / .210			
T (max)	0.125					0.130				0.135			
Min E/B	0.020 ± .010					0.024 ± .015				0.025 ± .015			
VDCW (MAX)	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	6.3V	10V	25V	50V
395	3.90uF												
475	4.70uF												
685	6.80uF												
106	10.0uF												
156	15.0uF												
226	22.0uF												
476	47.0uF												
107	100.0uF												
157	150.0uF												
227	220.0uF												


\* For values above 1uF, thickness may be greater than specified above.

T(max): 1206 - 0.075"      1812 - 0.130"  
 1210 - 0.125"      2220 - 0.135"

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.  
 All components manufactured with the X7R dielectric are also available as an X5R dielectric.

**VOLTAGE AND CAPACITANCE RANGE**

**Z5U DIELECTRIC**



Values that are typically available.


(All measurements in inches)

SIZE	0504 (± 0.008)		0603 (± 0.006)		0805 (± 0.008)		1206 (± 0.008)		1210 (±0.016)		1812 (±0.016)		2220 / 2221 (±0.016)	
	L	W	L	W	L	W	L	W	L	W	L	W	L	W
T (max)	0.040		0.038		0.058		0.070		0.075		0.085		0.108 / .108	
Min E/B	0.005		0.008		0.020 ± .010		0.020 ± .010		0.020 ± .010		0.024 ± .015		0.025 ± .015	
VDCW (MAX)	25V		50V		25V		50V		25V		50V		25V	
102	1000pF													
122	1200													
152	1500													
182	1800													
222	2200													
272	2700													
332	3300													
392	3900													
472	4700													
562	5600													
682	6800													
822	8200													
103	.01uF													
123	.012													
153	.015													
183	.018													
223	.022													
273	.027													
333	.033													
393	.039													
473	.047													
563	.056													
683	.068													
823	.082													
104	.100uF													
124	.120													
154	.150													
184	.180													
224	.220													
274	.270													
334	.330													

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

**VOLTAGE AND CAPACITANCE RANGE**

**Z5U DIELECTRIC**



Values that are typically available.


(All measurements in inches)

SIZE	0504 (± 0.008)		0603 (± 0.006)		0805 (± 0.008)		1206 (± 0.008)		1210 (± 0.016)		1812 (± 0.016)		2220 / 2221 (± 0.016)	
	L	W	T (max)	Min E/B	L	W	T (max)	Min E/B	L	W	T (max)	Min E/B	L	W
VDCW (MAX)	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V
CAPACITANCE CODE	394	.390												
	474	.470												
	564	.560												
	684	.680												
	824	.820												
	105	1.00uF												
	125	1.20												
	155	1.50												
	185	1.80												
	225	2.20												
	335	3.30												
	395	3.90												
	475	4.70												
	685	6.80												
	106	10.0uF												
	156	15.0uF												
226	22.0uF													
476	47.0uF													
107	100.0uF													

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.  
 For values above 1uF, thickness may be greater than specified above.

**VOLTAGE AND CAPACITANCE RANGE**

**Y5V DIELECTRIC**



Values that are typically available.


(All measurements in inches)

SIZE	0201 (± 0.002)		0402 (± 0.004)				0603 (± 0.006)				0805 (± 0.008)				1206 (± 0.008)				1210 (± 0.016)				1812 (± 0.016)				
L	0.024		0.040				0.063				0.080				0.126				0.177								
W	0.012		0.020				0.032				0.050				0.063				0.098								
T (max)	0.012		0.025				0.038				0.058				0.070				0.096								
Min E/B	0.002		0.004				0.008				0.020 ± .010				0.020 ± .010				0.020 ± .010				0.024 ± .015				
VDCW (MAX)	10V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	10V	16V	25V	50V	6.3V	10V	16V	25V	6.3V	10V	25V
102	1000pF																										
122	1200																										
152	1500																										
182	1800																										
222	2200																										
272	2700																										
332	3300																										
392	3900																										
472	4700																										
562	5600																										
682	6800																										
822	8200																										
103	.01uF																										
123	.012																										
153	.015																										
183	.018																										
223	.022																										
273	.027																										
333	.033																										
393	.039																										
473	.047																										
563	.056																										
683	.068																										
823	.082																										
104	.10uF																										
124	.120																										
154	.150																										
184	.180																										
224	.220																										
274	.270																										
334	.330																										

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.  
 For values above 1uF, thickness may be greater than specified above.

**VOLTAGE AND CAPACITANCE RANGE**

**Y5V DIELECTRIC**



Values that are typically available.

(All measurements in inches)


SIZE	0201 (± 0.002)		0402 (± 0.004)		0603 (± 0.006)				0805 (± 0.008)				1206 (± 0.008)				1210 (± 0.016)				1812 (± 0.016)						
L	0.024		0.040		0.063				0.080				0.126				0.126				0.177						
W	0.012		0.020		0.032				0.050				0.063				0.098				0.126						
T (max)	0.012		0.025		0.038				0.058				0.070				0.10				0.085						
Min E/B	0.002		0.004		0.008				0.020 ± .010				0.020 ± .010				0.020 ± .010				0.024 ± .015						
VDCW (MAX)	10V	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	25V	
394	.390																										
474	.470																										
564	.560																										
684	.680																										
824	.820																										
105	1.00uF																										
125	1.20																										
155	1.50																										
185	1.80																										
225	2.20																										
335	3.30																										
395	3.90																										
475	4.70																										
685	6.80																										
106	10.0uF																										
156	15.0uF																										
226	22.0uF																										
476	47.0uF																										
107	100.0uF																										

**NOTE:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.  
 For values above 1uF, thickness may be greater than specified above.

**TAPE & REEL SPECIFICATIONS**

All tape and reel specifications must be adhered to per EIA-481-1-A.


**REEL**

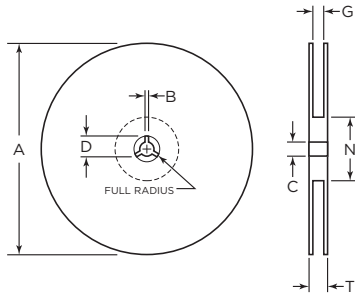

Unit: mm (inch)

Tape	B min	C	A (7")	A (13")	D min	N min	G	T max
4mm	2.0 (0.079)	13 ± 0.05 (0.512 ± 0.02)	178 ± 2.0 (7 ± 0.079)	-	21 ± 0.8 (0.82 ± 0.03)	50 (1.97)	5.0 ± 1.5 (0.196 ± 0.05)	8.0 max (0.315 max)
8mm	2.0 (0.07)	13 ± 0.05 (0.512 ± 0.02)	178 ± 2.0 (7 ± 0.079)	330 ± 2.0 (13 ± 0.08)	20.2 (0.795)	50 (1.97)	10 ± 1.5 (0.394 ± 0.059)	14.9 (0.587)
12mm	2.0 (0.07)	13 ± 0.05 (0.512 ± 0.02)	178 ± 2.0 (7 ± 0.079)	330 ± 2.0 (13 ± 0.08)	20.2 (0.795)	50 (1.97)	10 ± 1.5 (0.394 ± 0.059)	14.9 (0.587)

**TAPE**

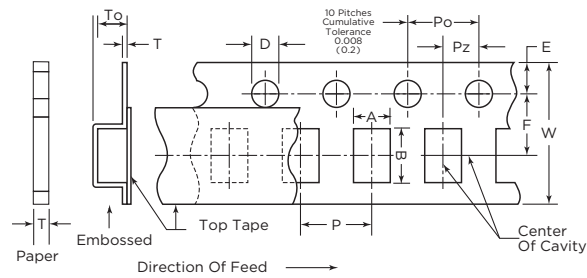

**7" Reel Quantities \*\***

SIZE	01005 (E)	01005 (P)	0201	0402	0603	0805	1206	1210	1812	2221
Tape Size	4mm	8mm	8mm	8mm	8mm	8mm	8mm	8mm	12mm	12mm
Min Qty Per Reel	40,000*	20000*	15,000	5,000	3,000	2,000	2,000	1,000	1,000	1,000
Max Qty Per Reel	40,000*	20000*	15,000	10,000	4,000	5,000	5,000	5,000	3,000	1,000

NOTE: \*\* Quantity dependent on thickness  
 \*Smaller quantities may be available. Please contact us.

**Paper Tape Carrier Dimensions (8mm)**

Unit: mm (inch)

Size (inches)	A	B	W	F	E	Po	Pz	D	t	P
01005	$\frac{0.25 \pm 0.05}{(0.010 \pm .002)}$	$\frac{0.45 \pm 0.05}{(0.018 \pm .002)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{-0.0}$ (.039 ± .002) - .000	$\frac{1.5 \pm 0.1}{(.064 \pm .004)}$	$\frac{1.15 \text{ max}}{(.045 \text{ max})}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$
0201	$\frac{0.37 \pm 0.05}{(0.014 \pm .002)}$	$\frac{0.67 \pm 0.05}{(0.026 \pm .002)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{-0.0}$ (.039 ± .002) - .000	$\frac{1.5 \pm 0.1}{(.064 \pm .004)}$	$\frac{1.15 \text{ max}}{(.045 \text{ max})}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$
0402	$\frac{0.65 \pm 0.1}{(.026 \pm .004)}$	$\frac{1.10 \pm 0.2}{(.043 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{-0.0}$ (.039 ± .002) - .000	$\frac{1.5 \pm 0.1}{(.064 \pm .004)}$	$\frac{1.15 \text{ max}}{(.045 \text{ max})}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$
0603	$\frac{1.10 \pm 0.2}{(.043 \pm .008)}$	$\frac{1.90 \pm 0.2}{(.075 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{-0.0}$ (.039 ± .002) - .000	$\frac{1.5 \pm 0.1}{(.064 \pm .004)}$	$\frac{1.15 \text{ max}}{(.045 \text{ max})}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$
0805	$\frac{1.16 \pm 0.2}{(.046 \pm .008)}$	$\frac{2.4 \pm 0.2}{(.095 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{-0.0}$ (.039 ± .002) - .000	$\frac{1.5 \pm 0.1}{(.064 \pm .004)}$	$\frac{1.15 \text{ max}}{(.045 \text{ max})}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$
1206	$\frac{2.0 \pm 0.2}{(.079 \pm .008)}$	$\frac{3.6 \pm 0.2}{(.142 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm 0.1}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{-0.0}$ (.039 ± .002) - .000	$\frac{1.5 \pm 0.1}{(.064 \pm .004)}$	$\frac{1.15 \text{ max}}{(.045 \text{ max})}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$

**Embossed Carrier Dimensions (4mm, 8mm & 12mm)**




Size (inches)	A	B	W	F	E	Po	Pz	D	To	T	P
01005	$\frac{0.23}{(0.009)}$	$\frac{0.43}{(0.016)}$	$\frac{4.0 \pm 0.05}{(0.157 \pm 0.002)}$	$\frac{1.8 \pm 0.02}{(0.070 \pm 0.001)}$	$\frac{0.9 \pm 0.05}{(0.035 \pm 0.002)}$	$\frac{2.0 \pm 0.04}{(0.079 \pm 0.001)}$	$\frac{2.00}{(0.079)}$	$\frac{0.8 \pm 0.04}{(0.031 \pm 0.001)}$	$\frac{0.5 \text{ max}}{(0.019 \text{ max})}$	$\frac{0.15 -0.4}{(0.005 -0.015)}$	$\frac{1.00}{(0.039)}$
0805	$\frac{1.48 \pm 0.2}{(.058 \pm .008)}$	$\frac{2.3 \pm 0.2}{(.091 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm .01}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$	$\frac{1.5 \pm 0.1}{-0.0}$ (.06 ± .004) - .000	$\frac{2.5 \text{ max}}{(.098 \text{ max})}$	$\frac{0.6 \text{ max}}{(.024 \text{ max})}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$
1206	$\frac{2.0 \pm 0.2}{(.079 \pm .008)}$	$\frac{3.6 \pm 0.2}{(.142 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm .01}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$	$\frac{1.5 \pm 0.1}{-0.0}$ (.06 ± .004) - .000	$\frac{2.5 \text{ max}}{(.098 \text{ max})}$	$\frac{0.6 \text{ max}}{(.024 \text{ max})}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$
1210	$\frac{2.9 \pm 0.2}{(.114 \pm .008)}$	$\frac{3.6 \pm 0.2}{(.142 \pm .008)}$	$\frac{8.0 \pm 0.2}{(.315 \pm .008)}$	$\frac{3.5 \pm .01}{(.138 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$	$\frac{1.5 \pm 0.1}{-0.0}$ (.06 ± .004) - .000	$\frac{2.5 \text{ max}}{(.098 \text{ max})}$	$\frac{0.6 \text{ max}}{(.024 \text{ max})}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$
1812	$\frac{3.6 \pm 0.2}{(.142 \pm .008)}$	$\frac{4.9 \pm 0.2}{(.193 \pm .008)}$	$\frac{12.0 \pm 0.3}{(.472 \pm .012)}$	$\frac{5.6 \pm 0.1}{(.221 \pm .004)}$	$\frac{1.75 \pm 0.1}{(.069 \pm .004)}$	$\frac{4.0 \pm 0.1}{(.157 \pm .004)}$	$\frac{2.0 \pm 0.05}{(.079 \pm .002)}$	$\frac{1.5 \pm 0.1}{-0.0}$ (.06 ± .004) - .000	$\frac{3.8 \text{ max}}{(.150 \text{ max})}$	$\frac{0.6 \text{ max}}{(.024 \text{ max})}$	$\frac{8.0 \pm 0.1}{(.315 \pm .004)}$

## ENVIRONMENTAL CHARACTERISTICS

NO	ITEM		PERFORMANCE	TEST CONDITION					
1	APPEARANCE		NO ABNORMAL EXTERIOR APPEARANCE	THROUGH MICROSCOPE (X10)					
2	INSULATION RESISTANCE		10,000M OR 500M $\mu$ F PRODUCT WHICHEVER IS SMALLER (RATED VOLTAGE IS BELOW 16V: 10,000M OR 100M $\mu$ F)	RATED VOLTAGE SHALL BE APPLIED. MEASUREMENT TIME IS 60 - 120 RATED VOLTAGE TIME 60 SEC .					
3	WITHSTANDING VOLTAGE		NO DIELECTRIC BREAKDOWN OR MECHANICAL BREAKDOWN	CLASS I : 300% OF THE RATED VOLTAGE FOR 1-5 SEC. CLASS II: 250% OF THE RATED VOLTAGE FOR 1-5 SEC IS APPLIED WITH LESS THAN 50mA CURRENT					
4	CAPACITANCE	CLASS I	WITHIN THE SPECIFIED TOLERANCE	CAPACITANCE	FREQUENCY	VOLTAGE			
				1,000pF AND BELOW	1MHZ $\pm$ 10%	0.5 - 5 Vrms			
		MORE THAN 1,000 pF		1kHz $\pm$ 10%					
		CLASS II		CAPACITANCE	FREQUENCY	VOLTAGE			
10 $\mu$ F AND BELOW	1kHz $\pm$ 10%		1.0 $\pm$ 0.2Vrms						
			MORE THAN 10 $\mu$ F	120HZ $\pm$ 20%	0.5 $\pm$ 0.1Vrms				
5	Q	CLASS I	OVER 30pF : Q 1,000 LESS THAN 30pF: Q 400 +20C (C: CAPACITANCE)	CAPACITANCE	FREQUENCY	VOLTAGE			
				1,000pF AND BELOW	1MHZ $\pm$ 10%	0.5 - 5 Vrms			
				MORE THAN 1,000 pF	1kHz $\pm$ 10%				
6	DISSIPATION FACTOR (Tan $\theta$ CLASS II)	CLASS II	<b>X7R, X6S, X5R</b>						
			<b>Rated Voltage</b>	<b>D.F.</b>	<b>Exception of D.F.</b>				
			$\geq$ 50V	$\leq$ 2.5%	$\leq$ 3%	0201 (50V); 0603 $\geq$ 0.047 $\mu$ F 0805 $\geq$ 0.22 $\mu$ F; 1206 $\geq$ 0.47 $\mu$ F			
					$\leq$ 5%	0603 $\geq$ 1 $\mu$ F; 0805 $\geq$ 1 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F			
			25V	$\leq$ 2.5%	$\leq$ 5%	0201 $\geq$ 0.01 $\mu$ F; 0805 $\geq$ 1 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F			
					$\leq$ 10%	0402 $\geq$ 0.10 $\mu$ F; 0603 $\geq$ 0.33 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 22 $\mu$ F			
			16V	$\leq$ 3.5%	$\leq$ 5%	0201 $\geq$ 0.01 $\mu$ F; 0402 $\geq$ 0.033 $\mu$ F; 0805 $\geq$ 0.68 $\mu$ F; 1206 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F			
					$\leq$ 10%	0402 $\geq$ 0.47 $\mu$ F; 0603 $\geq$ 0.68 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 22 $\mu$ F			
			10V	$\leq$ 5%	$\leq$ 10%	0402 $\geq$ 0.33 $\mu$ F; 0603 $\geq$ 0.33 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 22 $\mu$ F			
			6.3V	$\leq$ 10%					
						<b>Y5V, Z5U</b>			
			<b>Rated Voltage</b>	<b>D.F.</b>	<b>Exception of D.F.</b>				
			$\geq$ 50V	$\leq$ 5%	$\leq$ 9%	0603 $\geq$ 0.1 $\mu$ F; 0805 $\geq$ 0.47 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F;			
			25V	$\leq$ 5%	$\leq$ 9%	0402 $\geq$ 0.047 $\mu$ F; 0603 $\geq$ 0.1 $\mu$ F; 0805 $\geq$ 0.33 $\mu$ F; 1206 $\geq$ 1 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F			
$\leq$ 12.5%	0603 $\geq$ 2.2 $\mu$ F; 0805 $\geq$ 3.3 $\mu$ F; 1206 $\geq$ 10 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; 1812 $\geq$ 47 $\mu$ F								
16V	$\leq$ 9%	$\leq$ 16%	0603 $\geq$ 2.2 $\mu$ F; 0805 $\geq$ 3.3 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 10 $\mu$ F; 1812 $\geq$ 47 $\mu$ F						
10V	$\leq$ 12.5%	$\leq$ 16%							
6.3V	$\leq$ 16%								



## ENVIRONMENTAL CHARACTERISTICS

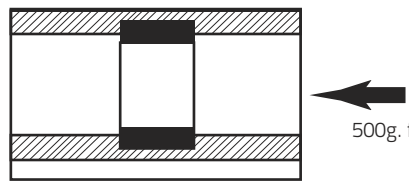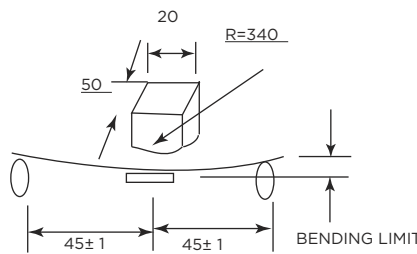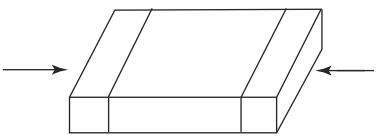NO	ITEM		PERFORMANCE		TEST CONDITION			
			CHARACTERISTIC	TEMP. COEFFICIENT (PPM/°C)	THESE SYMMETRICAL TOLERANCE APPLY TO 2 POINT MEASUREMENT OF TEMPERATURE COEFFICIENT: ONE AT -25°C AND AT 85°C			
7	CAPACITANCE TEMPERATURE COEFFICIENT	CLASS I	COG/NPO	0 ± 60 (±30)	STEP	TEMPERATURE (°C)		
				-150 ± 60	1	25 ± 2		
				-220 ± 60	2	MIN RATED TEMP ± 2		
				-330 ± 60	3	25 ± 2		
				-470 ± 60	4	MAX RATED TEMP ± 2		
				-750 ± 120	5	25 ± 2		
				+350 - -1000				
8	TEMPERATURE CHARACTERISTICS	CLASS II	CAPACITANCE CHANGE		STEP	TEMP. (°C) B	TEMP. (°C) F	
			CHAR.	CAP. CHANGE (%)				1
			X	X7R	±15%	2	-55 ± 2	-25 ± 2
				X6S	±22%	3	25 ± 2	25 ± 2
			Y	X5R	±15%	4	125 ± 2	85 ± 2
				Y5V	-82% - +22%	5	25 ± 2	25 ± 2
			Z5U	-56% - +22%				
						$\frac{C2 - C1}{C1} \times 100\%$		
						C1: CAPACITANCE AT STANDARD TEMPERATURE (25°C) C2: CAPACITANCE AT EACH TEMPERATURE		
9	ADHESIVE STRENGTH OF TERMINATION	NO INDICATION OF PEELING SHALL OCCUR ON THE TERMINAL ELECTRODE			A 500g.f PRESSURE SHALL BE APPLIED FOR 10±1 SECOND 			
10	BENDING STRENGTH	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCURE			BENDING SHALL BE APPLIED TO THE LIMIT (1mm) WITH 0.3mm/SEC		
		CAPACITANCE	CHARACTER	CHANGE OF CAPACITANCE				
			CLASS I	WITHIN ±5% OR ±0.5pF WHICHEVER IS LARGER				
			CLASS II	X (X7R, X6S, X5R)	WITHIN ±12.5%			
			Y (Y5V, Z5U)	WITHIN ±30%				
11	SOLDERABILITY	MORE THAN 75% OF THE TERMINAL SURFACE IS TO BE SOLDERED NEWLY, SO METAL PART (A) DOES NOT COME OUT OR DISSOLVE 			SOLDER TEMPERATURE: 245 ± 5 °C SOLDER: Sn_Ag3_0.5Cu FLUX: RMA Type PRE-HEATING: AT 80 - 120 °C FOR 10 - 30 SEC.			

## ENVIRONMENTAL CHARACTERISTICS

NO	ITEM	PERFORMANCE	TEST CONDITION									
12	RESISTANCE TO SOLDERING HEAT	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCUR									
		CAPACITANCE	CHARACTERISTIC	CAP. CHANGE								
			CLASS I	WITHIN ±2.5% OR ±0.25 pF WHICHEVER IS LARGER								
			CLASS II	X	WITHIN ±7.5%							
				Y	WITHIN ±20%							
		QCLASS I	30 pF AND OVER: Q 1000 LESS THAN 30 pF: Q 400 + 20xC									
		Tan CLASS II	TO SATISFY THE SPECIFIED INITIAL VALUE									
		INSULATION RESISTANCE	TO SATISFY THE SPECIFIED INITIAL VALUE									
WITHSTANDING VOLTAGE	TO SATISFY THE SPECIFIED INITIAL VALUE											
13	VIBRATION TEST	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCUR									
		CAPACITANCE	CHARACTERISTIC	CAP. CHANGE								
			CLASS I	WITHIN ±2.5% OR ±0.25 pF WHICHEVER IS LARGER								
			CLASS II	X	WITHIN ±5%							
				Y	WITHIN ±20%							
		QCLASS I	30 pF AND OVER: Q 1000 LESS THAN 30 pF: Q 400 + 20xC									
		Tan CLASS II	TO SATISFY THE SPECIFIED INITIAL VALUE									
INSULATION RESISTANCE	TO SATISFY THE SPECIFIED INITIAL VALUE											
			<p>DIP : SOLDER TEMPERATURE OF 270± 5 °C  DIP TIME :10±1 SEC.  EACH TERMINATION SHALL BE FULLY IMMERSSED AND PREHEATED AS FOLLOWING:</p> <table border="1"> <thead> <tr> <th>STEP</th> <th>TEMP. (°C)</th> <th>TIME (SEC.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>80-100</td> <td>60</td> </tr> <tr> <td>2</td> <td>150-180</td> <td>60</td> </tr> </tbody> </table> <p>MEASURE AT ROOM TEMP. AFTER COOLING FOR  CLASS I : 24 ± 2 HOURS  CLASS II : 48 ± 4 HOURS</p>	STEP	TEMP. (°C)	TIME (SEC.)	1	80-100	60	2	150-180	60
STEP	TEMP. (°C)	TIME (SEC.)										
1	80-100	60										
2	150-180	60										
			<p>THE CAPACITOR SHALL BE SUBJECTED TO A HARMONIC MOTION HAVING A TOTAL AMPLITUDE of 1.5mm</p> <p>THE ENTIRE FREQUENCY RANGE, FROM 10 TO 55Hz AND RETURN TO 10Hz SHALL BE TRAVERSED IN 1 MINUTE.</p> <p>THIS CYCLE SHALL BE PERFORMED 2 HOURS IN EACH THREE MUTUALLY PERPENDICULAR DIRECTION, FOR TOTAL PERIOD of 6 HOURS.</p>									

**ENVIRONMENTAL CHARACTERISTICS**

NO	ITEM	PERFORMANCE	TEST CONDITION			
14	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCUR	TEMPERATURE : 40±2 °C RELATIVE HUMIDITY: 90-95 %RH TEST TIME : 500 +12/-0 Hr.  MEASURE AT ROOM TEMPERATURE AFTER COOLING FOR CLASS I : 24±2 Hr. CLASS II : 48±4 Hr.  SEE (FIG.3)			
	CAPACITANCE	CHARACTERISTIC		CAPACITANCE CHANGE		
		CLASS I		WITHIN ±5% OR±0.5pF WHICHEVER IS LARGER		
		CLASS II		X	WITHIN ±12.5%	
				Y	WITHIN ±30%	
	QCLASS I	30pF AND OVER : Q 350 10 - 30pF : Q 275 + 2.5xC LESS THAN 10pF : Q 200 + 10xC				
	DISSIPATION FACTOR (Tanθ CLASS II)	<b>X7R, X6S, X5R</b>				
		<b>Rated Voltage</b>		<b>D.F.</b>	<b>Exception of D.F.</b>	
		≥50V		≤2.5%	≤3%	0201 (50V); 0603≥0.047uF 0805≥0.22uF; 1206≥0.47uF
					≤5%	0603≥1uF; 0805≥1uF; 1206≥4.7uF; 1210≥4.7uF
25V		≤2.5%	≤5%	0201≥0.01uF; 0805≥1uF; 1210≥4.7uF		
			≤10%	0402≥0.10uF; 0603≥0.33uF; 0805≥2.2uF 1206≥4.7uF; 1210≥22uF		
16V		≤3.5%	≤5%	0201≥0.01uF; 0402≥0.033uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF		
			≤10%	0402≥0.47uF; 0603≥0.68uF; 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF		
10V		≤5%	≤10%	0402≥0.33uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF		
6.3V		≤10%				
<b>Y5V, Z5U</b>						
<b>Rated Voltage</b>	<b>D.F.</b>	<b>Exception of D.F.</b>				
≥50V	≤5%	≤9%	0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;			
25V	≤5%	≤9%	0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; 1206≥1uF; 1210≥4.7uF			
16V	≤9%	≤12.5%	0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF			
10V	≤12.5%	≤16%	0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF			
6.3V	≤16%					
INSULATION RESISTANCE	MINIMUM INSULATION RESISTANCE: 1,000M OR 50M µF PRODUCT WHICHEVER IS SMALLER					

**ENVIRONMENTAL CHARACTERISTICS**

NO	ITEM	PERFORMANCE	TEST CONDITION			
15	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCUR	APPLIED VOLTAGE: RATED VOLTAGE TEMPERATURE : 40±2 °C RELATIVE HUMIDITY: 90-95%RH TEST TIME : 500 +12/-0 Hr. CURRENT APPLIED: 50mA MAX.  MEASURING AT ROOM TEMPERATURE AFTER COOLING FOR CLASS I : 24±2 Hr. CLASS II : 48±4 Hr.  SEE (FIG.3)			
	CAPACITANCE	CHARACTERISTIC		CAPACITANCE CHANGE		
		CLASS I		WITHIN ±7.5% OR±0.75pF WHICHEVER IS LARGER		
		CLASS II		X	WITHIN ±12.5%	
	Y			WITHIN ±30%		
	QCLASS I	30pF AND OVER : Q 200 30pF AND BELOW : Q 100 + 10/3xC				
	DISSIPATION FACTOR (Tanθ CLASS II)	<b>X7R, X6S, X5R</b>				
		Rated Voltage		D.F.	Exception of D.F.	
		≥50V		≤2.5%	≤3%	0201 (50V); 0603≥0.047uF 0805≥0.22uF; 1206≥0.47uF
					≤5%	0603≥1uF; 0805≥1uF; 1206≥4.7uF; 1210≥4.7uF
25V		≤2.5%	≤5%	0201≥0.01uF; 0805≥1uF; 1210≥4.7uF		
			≤10%	0402≥0.10uF; 0603≥0.33uF; 0805≥2.2uF 1206≥4.7uF; 1210≥22uF		
16V		≤3.5%	≤5%	0201≥0.01uF; 0402≥0.033uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF		
			≤10%	0402≥0.47uF; 0603≥0.68uF; 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF		
10V		≤5%	≤10%	0402≥0.33uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF		
6.3V	≤10%					
<b>Y5V, Z5U</b>						
Rated Voltage	D.F.	Exception of D.F.				
≥50V	≤5%	≤9%	0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;			
25V	≤5%	≤9%	0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; 1206≥1uF; 1210≥4.7uF			
16V	≤9%	≤12.5%	0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF			
10V	≤12.5%	≤16%	0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF			
6.3V	≤16%					
INSULATION RESISTANCE	MINIMUM INSULATION RESISTANCE: 100 M OR 25M μF PRODUCT, WHICHEVER IS SMALLER					


**ENVIRONMENTAL CHARACTERISTICS**

NO	ITEM	PERFORMANCE	TEST CONDITION			
16	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCUR	APPLIED VOLTAGE: 200% OF RATED VOLTAGE TEST TIME : 1000 +48/-0 Hr. CURRENT APPLIED: 50mA MAX.			
	CAPACITANCE	CHARACTERISTIC		CAP. CHANGE		
		CLASS I		WITHIN ±3% OR ±0.3pF, WHICHEVER IS LARGER		
		CLASS II		X	WITHIN ±12.5%	
	Y		WITHIN ±30%			
	QCLASS I	30pF AND OVER : Q 350 10 - 30 pF : Q 275 + 2.5xC LESS THAN 10pF :Q 200 + 10xC	CLASS I 125 ±3 °C			
	DISSIPATION FACTOR (Tanθ CLASS II)	<b>X7R, X6S, X5R</b>		(INITIAL VALUE MEASUREMENT) FOR CLASS II CAPACITORS, 200 % OF RATED VOLTAGE SHALL BE APPLIED FOR 1 HOUR AT THE MAXIMUM OPERATING TEMPERATURE, THEN KEEP IT AT ROOM TEMPERATURE FOR 48 ±4 HRS.  SEE (FIG.3)		
		Rated Voltage	D.F.		Exception of D.F.	
		≥50V	≤2.5%		≤3%	0201 (50V); 0603≥0.047uF 0805≥0.22uF; 1206≥0.47uF
					≤5%	0603≥1uF; 0805≥1uF; 1206≥4.7uF; 1210≥4.7uF
25V		≤2.5%	≤5%		0201≥0.01uF; 0805≥1uF; 1210≥4.7uF	
			≤10%		0402≥0.10uF; 0603≥0.33uF; 0805≥2.2uF 1206≥4.7uF; 1210≥22uF	
16V		≤3.5%	≤5%		0201≥0.01uF; 0402≥0.033uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF	
			≤10%		0402≥0.47uF; 0603≥0.68uF; 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF	
10V		≤5%	≤10%		0402≥0.33uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF	
6.3V		≤10%				
<b>Y5V, Z5U</b>						
Rated Voltage	D.F.	Exception of D.F.				
≥50V	≤5%	≤9%	0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;			
25V	≤5%	≤9%	0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; 1206≥1uF; 1210≥4.7uF			
16V	≤9%	≤12.5%	0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF			
10V	≤12.5%	≤16%	0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF			
6.3V	≤16%					
INSULATION RESISTANCE	MINIMUM INSULATION RESISTANCE: 1,000M OR 50M μF PRODUCT WHICHEVER IS SMALLER					


## ENVIRONMENTAL CHARACTERISTICS

NO	ITEM	PERFORMANCE	TEST CONDITION																													
17	APPEARANCE	NO MECHANICAL DAMAGE SHALL OCCUR	CAPACITORS SHALL BE SUBJECTED TO FIVE CYCLES OF THE TEMPERATURE CYCLE AS FOLLOWING  <table border="1"> <thead> <tr> <th>STEP</th> <th>TEMP.(°C)</th> <th>TIME (MIN)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>MIN. RATED TEMP. +0/-3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25</td> <td>2 - 3</td> </tr> <tr> <td>3</td> <td>MAX. RATED TEMP. +3/-0</td> <td>30</td> </tr> <tr> <td>4</td> <td>25</td> <td>2 - 3</td> </tr> </tbody> </table>	STEP	TEMP.(°C)	TIME (MIN)	1	MIN. RATED TEMP. +0/-3	30	2	25	2 - 3	3	MAX. RATED TEMP. +3/-0	30	4	25	2 - 3														
	STEP	TEMP.(°C)		TIME (MIN)																												
	1	MIN. RATED TEMP. +0/-3		30																												
	2	25		2 - 3																												
	3	MAX. RATED TEMP. +3/-0		30																												
	4	25		2 - 3																												
	CAPACITANCE	CHARACTERISTIC		CAP. CHANGE																												
		CLASS I		WITHIN ±2.5% OR ±0.25pF WHICHEVER IS LARGER																												
		CLASS II		X	WITHIN ±7.5%																											
				Y	WITHIN ±20%																											
QCLASS I	30 pF AND OVER : Q 1000 LESS THAN 30pF:Q 400 +20xC																															
TEMPERATURE CYCLE	TAN CLASS II	<b>X7R, X6S, X5R</b>																														
		<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>D.F.</th> <th colspan="2">Exception of D.F.</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥50V</td> <td rowspan="2">≤2.5%</td> <td>≤3%</td> <td>0201 (50V); 0603≥0.047uF 0805≥0.22uF; 1206≥0.47uF</td> </tr> <tr> <td>≤5%</td> <td>0603≥1uF; 0805≥1uF; 1206≥4.7uF; 1210≥4.7uF</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤2.5%</td> <td>≤5%</td> <td>0201≥0.01uF; 0805≥1uF; 1210≥4.7uF</td> </tr> <tr> <td>≤10%</td> <td>0402≥0.10uF; 0603≥0.33uF; 0805≥2.2uF 1206≥4.7uF; 1210≥22uF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0201≥0.01uF; 0402≥0.033uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF</td> </tr> <tr> <td>≤10%</td> <td>0402≥0.47uF; 0603≥0.68uF; 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF</td> </tr> <tr> <td>10V</td> <td>≤5%</td> <td>≤10%</td> <td>0402≥0.33uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF</td> </tr> <tr> <td>6.3V</td> <td>≤10%</td> <td></td> <td></td> </tr> </tbody> </table>	Rated Voltage	D.F.	Exception of D.F.		≥50V	≤2.5%	≤3%	0201 (50V); 0603≥0.047uF 0805≥0.22uF; 1206≥0.47uF	≤5%	0603≥1uF; 0805≥1uF; 1206≥4.7uF; 1210≥4.7uF	25V	≤2.5%	≤5%	0201≥0.01uF; 0805≥1uF; 1210≥4.7uF	≤10%	0402≥0.10uF; 0603≥0.33uF; 0805≥2.2uF 1206≥4.7uF; 1210≥22uF	16V	≤3.5%	≤5%	0201≥0.01uF; 0402≥0.033uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF	≤10%	0402≥0.47uF; 0603≥0.68uF; 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF	10V	≤5%	≤10%	0402≥0.33uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF	6.3V	≤10%		
		Rated Voltage	D.F.	Exception of D.F.																												
		≥50V	≤2.5%	≤3%	0201 (50V); 0603≥0.047uF 0805≥0.22uF; 1206≥0.47uF																											
				≤5%	0603≥1uF; 0805≥1uF; 1206≥4.7uF; 1210≥4.7uF																											
		25V	≤2.5%	≤5%	0201≥0.01uF; 0805≥1uF; 1210≥4.7uF																											
				≤10%	0402≥0.10uF; 0603≥0.33uF; 0805≥2.2uF 1206≥4.7uF; 1210≥22uF																											
		16V	≤3.5%	≤5%	0201≥0.01uF; 0402≥0.033uF; 0805≥0.68uF; 1206≥2.2uF; 1210≥4.7uF																											
				≤10%	0402≥0.47uF; 0603≥0.68uF; 0805≥2.2uF; 1206≥4.7uF; 1210≥22uF																											
		10V	≤5%	≤10%	0402≥0.33uF; 0603≥0.33uF; 0805≥2.2uF; 1206≥2.2uF; 1210≥22uF																											
6.3V	≤10%																															
<b>Y5V, Z5U</b>																																
<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>D.F.</th> <th colspan="2">Exception of D.F.</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤5%</td> <td>≤9%</td> <td>0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;</td> </tr> <tr> <td>25V</td> <td>≤5%</td> <td>≤9%</td> <td>0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; 1206≥1uF; 1210≥4.7uF</td> </tr> <tr> <td>16V</td> <td>≤9%</td> <td>≤12.5%</td> <td>0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF</td> </tr> <tr> <td>10V</td> <td>≤12.5%</td> <td>≤16%</td> <td>0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF</td> </tr> <tr> <td>6.3V</td> <td>≤16%</td> <td></td> <td></td> </tr> </tbody> </table>	Rated Voltage	D.F.	Exception of D.F.		≥50V	≤5%	≤9%	0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;	25V	≤5%	≤9%	0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; 1206≥1uF; 1210≥4.7uF	16V	≤9%	≤12.5%	0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF	10V	≤12.5%	≤16%	0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF	6.3V	≤16%										
Rated Voltage	D.F.	Exception of D.F.																														
≥50V	≤5%	≤9%	0603≥0.1uF; 0805≥0.47uF; 1206≥4.7uF;																													
25V	≤5%	≤9%	0402≥0.047uF; 0603≥0.1uF; 0805≥0.33uF; 1206≥1uF; 1210≥4.7uF																													
16V	≤9%	≤12.5%	0603≥2.2uF; 0805≥3.3uF; 1206≥10uF; 1210≥22uF; 1812≥47uF																													
10V	≤12.5%	≤16%	0603≥2.2uF; 0805≥3.3uF; 1206≥4.7uF; 1210≥10uF; 1812≥47uF																													
6.3V	≤16%																															
INSULATION RESISTANCE	TO SATISFY THE SPECIFIED INITIAL VALUE																															
			MEASURE AT ROOM TEMPERATURE AFTER COOLING FOR CLASS I : 24±2 Hr. CLASS II : 48±4 Hr. SEE(FIG.3)																													


### ADHESIVE STRENGTH OF TERMINATION

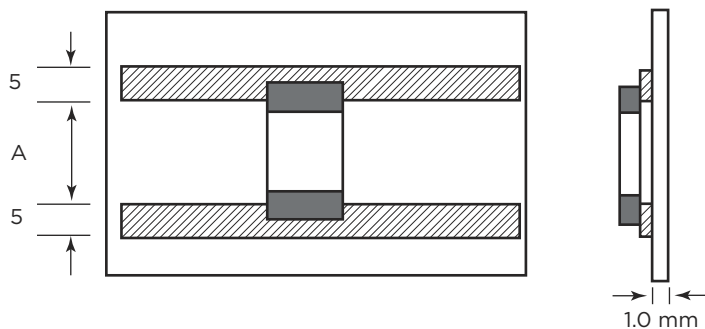

CODE	DIMENSION (mm)	A (mm)	CODE	DIMENSION (mm)	A (mm)
01005 (0402)	0.40 x 0.20	0.12	1206 (3216)	3.2 x 1.6	2.2
0201 (0603)	0.61 x 0.31	0.2	1210 (3225)	3.2 x 2.5	2.2
0402 (1005)	1.0 x 0.5	0.4	1812 (4532)	4.5 x 3.2	3.5
0603 (1608)	1.6 x 0.8	1.0	2220 (5750)	5.7 x 5.08	4.7
0805 (2012)	2.0 x 1.25	1.2			

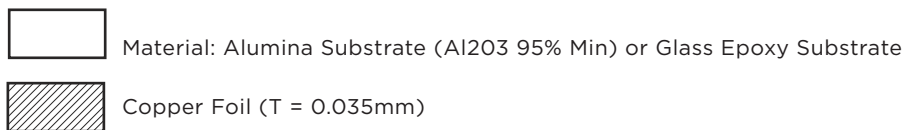


### SUBSTRATE BENDING STRENGTH

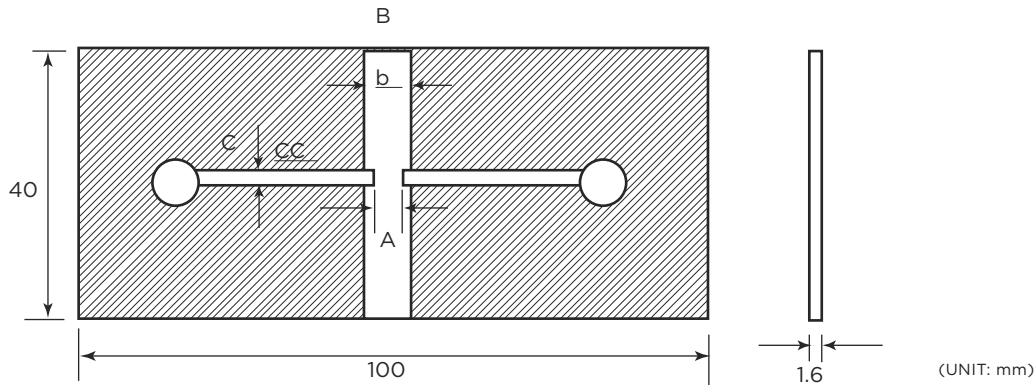

CODE	DIMENSION (mm)	A (mm)	B (mm)	C (mm)
01005 (0402)	0.40 x 0.20	0.12	0.7	0.20
0201 (0603)	0.61 x 0.31	0.2	1.0	0.4
0402 (1005)	1.0 x 0.5	0.4	1.4	0.5
0603 (1608)	1.6 x 0.8	1.0	3.0	1.0
0805 (2012)	2.0 x 1.25	1.2	4.0	1.65
1206 (3216)	3.2 x 1.6	2.2	5.0	2.0
1210 (3225)	3.2 x 2.5	2.2	5.0	3.2
1812 (4532)	4.5 x 3.2	3.5	7.0	4.0
2220 (5750)	5.7 x 5.08	4.7	8.5	5.0



**TEST SUBSTRATE**

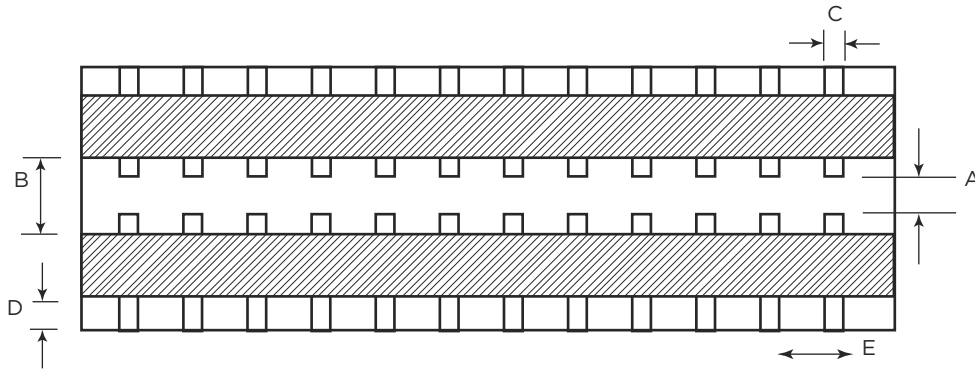

(UNIT: mm)

CODE	DIMENSION (MM)	A	B	C	D	E
0201 (0603)	0.61 x 0.31	0.2	1.0	0.4	7.5	3.6
0402 (1005)	1.0 x 0.5	0.4	1.4	0.5	7.5	3.8
0603 (1608)	1.6 x 0.8	1.0	3.0	0.7	7.5	4.0
0805 (2012)	2.0 x 1.25	1.2	4.0	1.0	7.5	4.2
1206 (3216)	3.2 x 1.6	2.2	5.0	1.3	7.5	4.6
1210 (3225)	3.2 x 2.5	2.2	5.0	2.0	7.5	5.5
1812 (4532)	4.5 x 3.2	3.5	7.0	2.7	7.5	6.2
2220 (5750)	5.7 x 5.08	4.7	8.5	3.4	7.5	7.0

MATERIAL: GLASS EPOXY SUBSTRATE



COPPER FOIL ( t = 0.035mm)



SOLDER RESIST