

QUARTZ CRYSTAL OSCILLATOR

■ GENERAL DESCRIPTION

The NJU6330 series is a C-MOS quartz crystal oscillator which consists of an oscillation amplifier and a 3-state output buffer.

This series are classed into three versions A, B and C according to their oscillation frequency range mentioned in the line-up table.

The oscillation amplifier incorporates feed-back resistance and oscillation capacitors(Cg, Cd), therefore, it requires no external component except quartz crystal.

Driverbility of the 3-state output buffer is 16mA (sink/source), thus it can drive both of TTL and C-MOS load.

■ PACKAGE OUTLINE



NJU6330XC





NJU6330XE

4

■ FEATURES

- Operating Voltage. -- 4.0~6.0V
- Maximum Oscillation Frequency (See Line-Up Table)
- Low Operating Current
- High Fan-out --  $I_{OL}/I_{OH}=16mA$
- 3-state Output Buffer
- Oscillation Capacitors Cg and Cd on-chip
- Oscillation and/or Output Stand-by Function
- Package Outline -- CHIP / EMP 8
- C-MOS Technology

■ PAD LOCATION/PIN CONFIGURATION



■ LINE-UP TABLE


Type No.	Recommended Osc. Freq.	Output Freq.	Cg, Cd
NJU6330A	20~35MHz	f <sub>0</sub>	28pF
6330B	30~50MHz		20pF
6330C	45~75MHz		17pF

■ COORDINATES

Unit:  $\mu m$

No.	PAD	X	Y
1	CONT	-130	248
2	XT	-414	248
3	XT	-414	-232
4	V <sub>SS</sub>	89	-248
5	F <sub>OUT</sub>	446	-228
8	V <sub>DD</sub>	153	228

■ BLOCK DIAGRAM

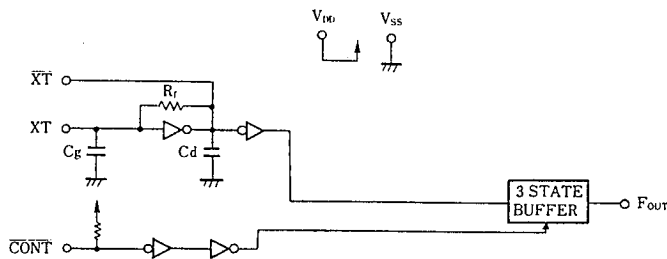

Chip Size : 1.29 X 0.8mm  
 Chip Center : X=0  $\mu m$ , Y=0  $\mu m$   
 Chip Thickness : 400  $\mu m \pm 30 \mu m$   
 (Note) No.6 and 7 terminals are only for package type information. There are no PAD on the chip.

**■ TERMINAL DESCRIPTION**

NO.	SYMBOL	F U N C T I O N
1	$\overline{\text{CONT}}$	3-State Output Control
		$\overline{\text{CONT}}$ Output ( $F_{\text{OUT}}$ )
		H Output Frequency $f_o$
		L Output High Impedance
2	XT	Quartz Crystal Connecting Terminals
3	$\overline{\text{XT}}$	
4	$V_{\text{SS}}$	GND
5	$F_{\text{OUT}}$	Output frequency $f_o$
8	$V_{\text{DD}}$	+ 5V

**■ ABSOLUTE MAXIMUM RATINGS**

 (  $T_a=25^\circ\text{C}$  )

P A R A M E T E R	SYMBOL	R A T I N G S	UNIT
Supply Voltage	$V_{\text{DD}}$	-0.5 ~ +7.0	V
Input Voltage	$V_{\text{IN}}$	$V_{\text{SS}}-0.5 \sim V_{\text{DD}}+0.5$	V
Output Voltage	$V_o$	-0.5 ~ $V_{\text{DD}}+0.5$	V
Input Current	$I_{\text{IN}}$	$\pm 10$	mA
Output Current	$I_o$	$\pm 25$	mA
Power Dissipation	$P_D$	200 (EMP)	mW
Operating Temperature Range	$T_{\text{opr}}$	-40 ~ +85	$^\circ\text{C}$
Storage Temperature Range	$T_{\text{stg}}$	-55 ~ +125	$^\circ\text{C}$

(Note) Decoupling capacitor should be connected between  $V_{\text{DD}}$  and  $V_{\text{SS}}$  due to the stabilized operation for the circuit.

**■ ELECTRICAL CHARACTERISTICS**



 (  $T_a=25^\circ\text{C}$ ,  $V_{\text{DD}}=5\text{V}$  )

P A R A M E T E R	SYMBOL	C O N D I T I O N S	MIN	TYP	MAX	UNIT
Operating Voltage	$V_{\text{DD}}$		4		6	V
	$I_{\text{DD1}}$	A Version $f_{\text{OSC}}=24\text{MHz}$ , No Load			25	mA
Operating Current	$I_{\text{DD2}}$	B Version $f_{\text{OSC}}=48\text{MHz}$ , No Load			30	
	$I_{\text{DD3}}$	C Version $f_{\text{OSC}}=48\text{MHz}$ , No Load			35	
Stand-by Current	$I_{\text{st}}$	$\overline{\text{CONT}}, \text{XT}=\text{V}_{\text{SS}}$ , No Load (Note)			1	$\mu\text{A}$
Input Voltage	$V_{\text{IH}}$		2.0		5.0	V
	$V_{\text{IL}}$		0		0.8	
Output Current	$I_{\text{OH}}$	$V_{\text{DD}}=5\text{V}$ , $V_{\text{OH}}=4.5\text{V}$	16			mA
	$I_{\text{OL}}$	$V_{\text{DD}}=5\text{V}$ , $V_{\text{OL}}=0.5\text{V}$	16			
Input Current	$I_{\text{IN}}$	$\overline{\text{CONT}}$ Terminal, $\overline{\text{CONT}}=\text{V}_{\text{SS}}$	125	250	500	$\mu\text{A}$
3-St Off-leakage Current	$I_{\text{oz}}$	$\overline{\text{CONT}}=\text{V}_{\text{SS}}$ , $F_{\text{OUT}}=\text{V}_{\text{SS}}$ or $V_{\text{DD}}$			$\pm 0.1$	$\mu\text{A}$
Internal Capacitor	$C_g, C_d$	A Version		28		pF
		B Version		20		
		C Version		17		
Max. Oscillation Freq.	$f_{\text{MAX}}$	A Version	35			MHz
		B Version	50			
		C Version	75			
Output Signal Symmetry	SYM	$C_L=15\text{pF}$ at 1.4V	40	50	60	%
		$C_L=15\text{pF}$ at 2.5V	45	50	55	
Output Signal Rise Time	$t_{r1}$	$C_L=15\text{pF}$ , $R_L=390\Omega$ , 0.4~2.4V		4	7	ns
		$C_L=50\text{pF}$ , 10~90%		5	7	
Output Signal Fall Time	$t_{f1}$	$C_L=15\text{pF}$ , $R_L=390\Omega$ , 2.4~0.4V		4	7	ns
		$C_L=50\text{pF}$ , 90~10%		5	7	



(Note) Excluding input current on  $\overline{\text{CONT}}$  terminal.

MEASUREMENT CIRCUITS





(1) Output Signal Symmetry

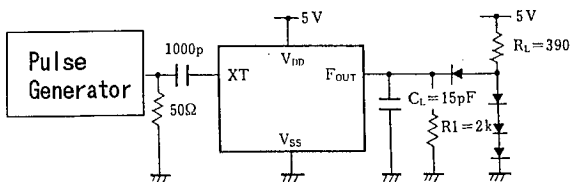

4

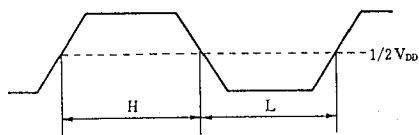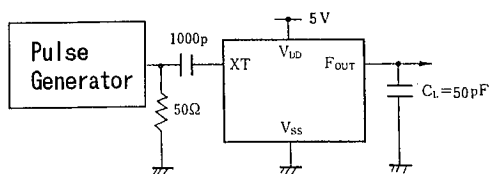

(2) Output Signal Rise / Fall Time

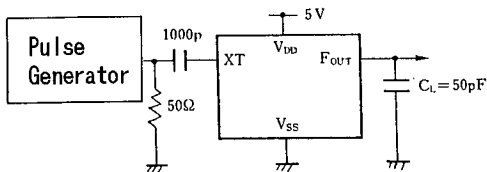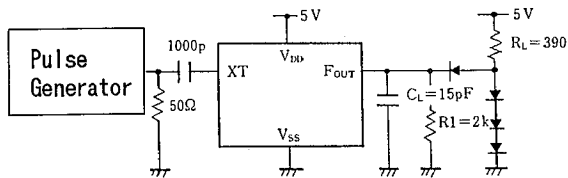

# NJU6330 Series

---

MEMO

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.