





Quad 2-Input Positive NAND Buffer

ELECTRICALLY TESTED PER:
MIL-M-38510/30202


LOGIC DIAGRAM

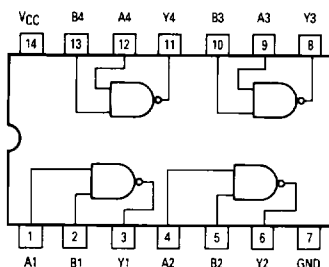

AC TEST CIRCUIT

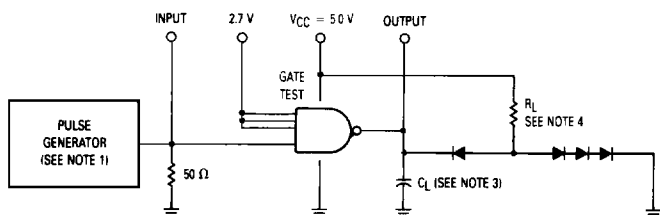

WAVEFORMS

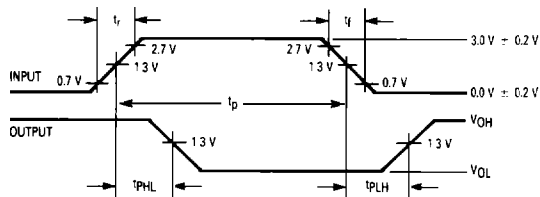

NOTES:

- Pulse generator has the following characteristics: PRR = 1.0 MHz, $t_r \approx 15$ ns, $t_f \approx 6.0$ ns, $t_p = 200 \pm 20$ ns and $Z_{OUT} = 50 \Omega$
- Terminal conditions: (pins not designated may be high = 2.0 V, low = 0.7 V or open)
- $C_L = 125$ pF $\pm 10\%$, including scope probe, wiring and stray capacitance, without package in test fixture
- $R_L = 667 \Omega \pm 5.0\%$
- Voltage measurements are to be made with respect to network ground terminal
- All diodes are 1N3064 or equivalent

Military 54LS37



AVAILABLE AS:

- JAN: JM38510/30202BXA
- SMD: *
- 883C: 54LS37/BXAJC

X = CASE OUTLINE AS FOLLOWS:
PACKAGE: CERDIP: C
CERFLAT: D
LCC: 2

*Call Factory for latest update

PIN ASSIGNMENTS

FUNCTION	DIL	FLATS	LCC	BURN-IN (CONDITION A)
A1	1	1	2	VCC
B1	2	2	3	GND
Y1	3	3	4	VCC
A2	4	4	6	VCC
B2	5	5	8	GND
Y2	6	6	9	VCC
GND	7	7	10	GND
Y3	8	8	12	VCC
A3	9	9	13	VCC
B3	10	10	14	GND
Y4	11	11	16	VCC
A4	12	12	18	VCC
B4	13	13	19	GND
VCC	14	14	20	VCC

BURN-IN CONDITIONS:
VCC = 5.0 V MIN/6.0 V MAX

TRUTH TABLE

A	B	Y
0	0	1
0	1	1
1	0	1
1	1	0

6

54LS37

Symbol	Parameter	Limits						Units	Test Condition (Unless Otherwise Specified)
		+25°C		+125°C		-55°C			
		Subgroup 1		Subgroup 2		Subgroup 3			
		Min	Max	Min	Max	Min	Max		
V _{OH}	Logical "1" Output Voltage	2.5		2.5		2.5		V	V _{CC} = 4.5 V, I _{OH} = -1.2 mA, V _{IL} = 0.7 V, V _{IN} = 5.5 V on other input.
V _{OL}	Logical "0" Output Voltage		0.4		0.4		0.4	V	V _{CC} = 4.5 V, I _{OL} = 12 mA, V _{IH} = 2.0 V on both inputs.
V _{IC}	Input Clamping Voltage		-1.5					V	V _{CC} = 4.5 V, I _{IN} = -18 mA, other input is open.
I _{IH1}	Logical "1" Input Current		20		20		20	μA	V _{CC} = 5.5 V, V _{IN} = 2.7 V, other input = 0 V.
I _{IH2}	Logical "1" Input Current		100		100		100	μA	V _{CC} = 5.5 V, V _{IN} = 5.5 V, other input = 0 V.
I _{IL}	Logical "0" Input Current	-160	-400	-160	-400	-160	-400	μA	V _{CC} = 5.5 V, V _{IN} = 0.4 V, other inputs = 5.5 V.
I _{OS}	Output Short Circuit Current	-30	-130	-30	-130	-30	-130	mA	V _{CC} = 5.5 V, V _{IN} = 0 V (all inputs), V _{OUT} = 0 V.
I _{CCH}	Power Supply Current		2.0		2.0		2.0	mA	V _{CC} = 5.5 V, V _{IN} = 0 V (all inputs).
I _{CCL}	Power Supply Current		12		12		12	mA	V _{CC} = 5.5 V, V _{IN} = 5.5 V (all inputs).
V _{IH}	Logical "1" Input Voltage	2.0		2.0		2.0		V	V _{CC} = 4.5 V.
V _{IL}	Logical "0" Input Voltage		0.7		0.7		0.7	V	V _{CC} = 4.5 V.
	Functional Tests	Subgroup 7		Subgroup 8A		Subgroup 8B			per Truth Table with V _{CC} = 5.0 V, V _{INL} = 0.5 V, and V _{IHN} = 2.5 V.

Symbol	Parameter	Limits						Units	Test Condition (Unless Otherwise Specified)
		+25°C		+125°C		-55°C			
		Subgroup 9		Subgroup 10		Subgroup 11			
		Min	Max	Min	Max	Min	Max		
t _{PHL}	Propagation Delay /Data-Output	2.0	25	2.0	30	2.0	30	ns	V _{CC} = 5.0 V, C _L = 125 pF, R _L = 667 Ω.
t _{PHL}	Output High-Low		24		30		30	ns	V _{CC} = 5.0 V, C _L = 45 pF, R _L = 667 Ω.
t _{PLH}	Propagation Delay /Data-Output	2.0	25	2.0	30	2.0	30	ns	V _{CC} = 5.0 V, C _L = 125 pF, R _L = 667 Ω.
t _{PLH}	Output Low-High		24		30		30	ns	V _{CC} = 5.0 V, C _L = 45 pF, R _L = 667 Ω.

NOTE:
1. The limits specified for C_L = 45 pF are guaranteed but not tested.